

**ARCOPLAST**  
 1873 Williamstown Drive  
 St. Peters, MO 63376

October 14, 2016  
 Lab No. 16P-4391  
 Invoice No. 220490  
 Page 9 of 29

**Attention: Ghislain Beauregard**


**REPORT OF MECHANICAL TEST**

**Group 9:**

**Arcoplast Engineered Polymer Panel 12mm**

**SUBJECT:** Seismic Shear Strength Test  
**METHOD:** Per Client's Instructions  
**INSTRUMENT:** Instron 5500R with Bluehill software  
**RESULTS:**

Specimen #	Max Load (lbf)	Compressive Extension @ Max Load (in)
1	580.4	0.067
2	622.2	0.062
3	603.3	0.062
4	684.8	0.076
5	655.8	0.053
Average	629.3	0.064

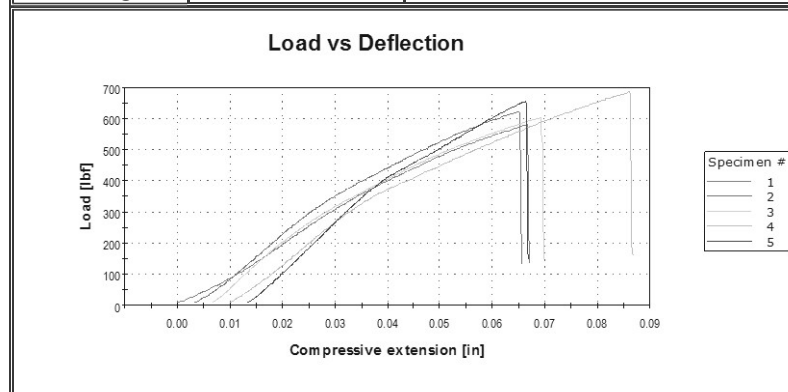

Karl Schmitz, Director  
 Materials Testing

KS/jlm



Certificate No. 0397-01  
 Certificate No. 0397-02

