




INSTALLATION MANUAL

**BSL-3 ABSL-3 BSL-4
HIGH CONTAINMENT FACILITIES**



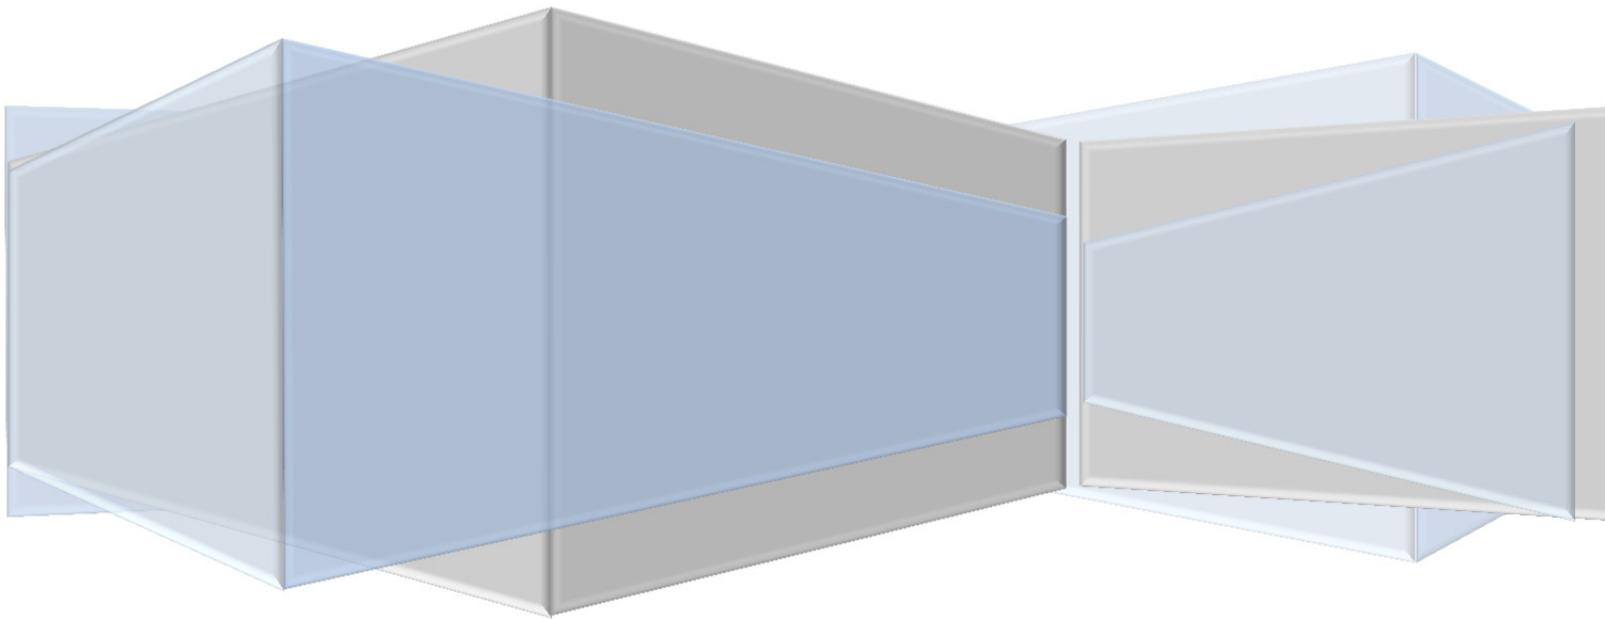

Arcoplast Modular Panel Installation Manual 2015

Introduction

Arcoplast glass-fiber reinforced polymer composite (GFRPC) interior finishes were developed specifically for applications in high containment facilities, food and beverage processing plants, pharmaceutical, nutraceutical, animal and health care facilities and biosafety laboratories that require long term, high performance sanitary surface finishes.

Whether you are working on a new or retrofit project, Arcoplast architectural composites for interior finishes are truly simple to work with. The glass-fiber reinforced polymer composite wall and ceiling panels, ceiling tiles, beam and chase covers, door and window units are all cut, drilled, sanded, polished and fastened with common industry tools and the same installation principles and craftsmanship apply.

Prior experience in BSL-3, ABSL-3, BSL-4 and cGMP construction is highly recommended and excellent technical skills in interior finishing will ensure a successful and state-of-the-art installation.

This installation manual is a help guide and reviews best installation practices and gives practical tips for the installer that wants to deliver the highest level of finish work in the art of glass-fiber reinforced polymer composite installation.

There are many variables on each project that may require a different approach to the installation of Arcoplast glass-fiber reinforced polymer composite materials and Arcoplast bears no responsibility for any procedure changed, modified or omitted. This installation guide is intended to support, enhanced and further the contractor's and the mechanic's installation experience.

If you have any questions or require additional support material, please contact Arcoplast Technical Services at 636-978-7781 www.arcoplast.com



Contents

Chapter One	Job Conditions	Page - 3
Chapter Two	Quality Control	Page - 4
Chapter Three	Mechanical, Electrical, Plumbing (MEP) Review	Page - 5
Chapter Four	Handling, Transporting and Storing Arcoplast Panels	Page - 6
Chapter Five	Handling and Storing of Accessories and Chemical Products	Page - 9
Chapter Six	Steel Stud Framing, Furring Channels and Insulation Blankets	Page - 10
Chapter Seven	Integrated Aluminum Window Housings	Page - 27
Chapter Eight	Surface Preparation & Supplies	Page - 33
Chapter Nine	Fastening Systems & Supplies	Page - 34
Chapter Ten	Panel Preparation, Cut and Cleaning Station	Page - 40
Chapter Eleven	Room Preparation & Set up	Page - 42
Chapter Twelve	Panel Installation	Page - 43
Chapter Thirteen	Glazing Installation	Page - 72
Chapter Fourteen	Wall to Floor Curb Details	Page - 75
Chapter Fifteen	Finishing Details	Page - 92
Chapter Sixteen	Application and Tooling of Arcoplast Finishing Compound	Page - 98
Chapter Seventeen	MEP – Penetration cut outs & Sealants	Page - 107
Chapter Eighteen	Gel Coat Repair	Page - 118
Chapter Nineteen	Tools & Equipment	Page - 126
Chapter Twenty	Personal Protective Equipment (PPE)	Page - 126



Chapter One : Job Conditions –

Environmental, physical and job preparedness conditions are critical to a successful Arcoplast installation. Contrary to conventional construction materials where the installation process is leading up to a finish product, whether through the application of laminates, paints or textile coverings, the fundamental difference with Arcoplast glass-fiber reinforced composite polymers is that you are now working with a permanent high gloss gel coated surface finish product that will only require more and more attention to details and craftsmanship. If you encounter a situation where you have questionable doubts as to the application or product limitation that you believe will not yield a perfect finish, stop immediately and take corrective measure. Any delayed action will only result in difficult and costly corrective measures in the future. Every procedure herein described will become a permanent and finished step to a very special and innovative environment.

It is important to read the installation manual throughout prior to the start of the panel installation. Many steps and different procedures could require immediate action that may or may not be associated with the current instructions.

1. Prepare a spreadsheet with a check item list and ensure that the owner/owner representative, project manager and subcontractor trades are all in a state of preparedness for the start of the wall and ceiling panel installation.
2. Ensure building is enclosed with an installation temperature between 60⁰ to 80⁰ F (15⁰ to 25⁰ C) with relative humidity 30 to 50 (%) Optimal temperature should be similar to the serviceable life of the proposed future environment.
3. Control draft and air movement to prevent infiltration and flow of contaminants.
4. Ensure building's temporary lighting, heating, cooling and ventilation are proper and acceptable for the installation of the Arcoplast wall and ceiling liner panel systems.
5. Review with the project manager to ensure MEP, fire suppression systems, alarms, door and monitoring controls and equipment are completed and in preparedness for wall and ceiling application.
6. Verify that services interfacing with the Arcoplast wall and ceiling panel system are at the proper location and depth to ensure proper fit.
7. Verify locations and cut out of access panels, lighting units and diffuser panels.
8. Coordinate with the project manager and sub-trades the sequence of the installation and cut out and final detailing of the penetrations, accessories and equipment.



Arcoplast Modular Panel Installation Manual 2015

9. Locate a material stocking /warehousing area for the Arcoplast panels, sealants and accessories, tooling and equipment.
10. Ensure that all material data and MSDS sheets are submitted to the project manager for review, posting and distribution.
11. Request adequate work area and cut station to ensure worker's safety and minimize dust and noise disturbance for human and animal welfare.
12. Ensure means for disposal and recycling of excess material, crating and packaging material.

Chapter Two : Quality Control -

To achieve Regulatory Compliance and ensure a quality installation, a Quality Control Program is an indispensable tool. There are many different types and levels of clean room environments, however a quality installation will invariably testify to the rigors of a (QCP) Quality Control Program.

1. Appoint a Quality Assurance (QA) person to ensure the installation procedure, craftsmanship and application is in conformance to requirement.
2. Prepare and post a Quality Control Program (QCP) log sheet in each room. Verify and log each step of the installation and completion for each individual room, hallways and process areas.
3. QCP log sheet should include trades interfacing with the Arcoplast wall and ceiling finishes.
4. For BSL-3, BSL-4 construction it is recommended to implement a photo gallery of each wall elevation and ceiling plan before closing walls and ceilings areas and remit to the project manager in close out submittal.
5. Ensure installation personnel have proper training and skill sets required to install glass-fiber reinforced polymer composite interior finishes in high containment facilities.
6. Ensure installation personnel have proper training in construction, equipment handling, comply with environmental and security requirements and preferably have completed the OSHA Construction Industry Outreach Training Program.
7. Ensure installation personnel are acquainted with Biosafety in Microbiological and Biomedical Laboratories (BMBL) BSL-3, BSL-4 & cGMP guidelines.



Arcoplast Modular Panel Installation Manual 2015

8. Example of Arcoplast BSL – 3 High Containment Quality Control Worksheet:

ARCOPLAST BSL - HIGH CONTAINMENT WALL & CEILING PANEL INSTALLATION QUALITY CONTROL WORKSHEET							
	ROOM #	CEILING	N WALL	S WALL	E WALL	W WALL	ACTION REQUIRED
	202						
R E V I E W	METAL FRAMING & PREP		X	X	X	X	VERIFIED / COMPLIANT
	SUBSTRATE INSPECTION & PREP						
	MECHANICAL		X	X	X	X	CEILING DUCT WORK FLANGE NOT FLUSH
	ELECTRICAL		X	X	X	X	GANG BOX NOT PLUMB
	PLUMBING						
	SPRINKLERS						NOT COMPLETE
	ALARMS						
	MONITORING SYSTEMS						
	LAB EQUIPMENT						
	DOOR / WINDOW FRAMES						
	FLOOR / CURB DETAIL						
	PHOTO DOCUMENTATION						
	C O M P L E T I O N	ADHESIVE TEST & VERIFICATION					
SURFACE PREPARATION							
PRIMER AND ADHESIVE APPLICATION							
PANEL PREPARATION & CUT OUTS							
PANEL INSTALLATION TRUE / PLUMB							
PANEL INSPECTION							
CONTROL JOINTS							
JOINT TAPE PREPARATION							
FINISHING COMPOUND JOINT/COVE							NOT WELL EXECUTED
FINISHING COMPOUND DOOR/WINDOW							
FINISHING COMPOUND INSPECTION							
FINISHING COMPOUND FLOOR BASE							
FINISHING COMPOUND MEP SEALS		X	X	X	X	X	100 % COMPLETED
APPROVED:		DATE:					

Chapter Three : Mechanical, Electrical and Plumbing Review -

Early review of the Mechanical, Electrical and Plumbing (MEP) at the preconstruction meeting will eliminate costly mistakes and facilitate coordination amongst all trades. Describing how the Arcoplast modular panel interfaces with various MEP products and the importance of proper sealants and application methods will simplify and accelerate the installation process and ensure a quality installation.

1. Ensure that MEP products interfacing with the Arcoplast finishes have been addressed and the mock-up samples and test reports have also been submitted and approved by the project manager.




Arcoplast Modular Panel Installation Manual 2015

2. Report to the project manager all MEP services, outlets, apparatus, piping and exposed services that are not level, in plane and proper depth for the sealant and trim device.
3. Verify MEP's substrate compatibility with the Arcoplast sealant/finishing compound.
4. It is recommended that MEP and all related services interfacing with the Arcoplast finishes be located and marked by the respected trades. However, the Arcoplast panel cut outs and sealant/finishing compound application should be executed by the Arcoplast panel installer.
5. MEP contractors, lab equipment technicians, various alarms and monitoring systems installers and all surface mounted accessories and services that require perforations or fastening in the Arcoplast modular panel finishes need to consult with the Arcoplast modular panel installer to ensure proper fastening methods and installation procedures.
6. Ensure all MEP equipment such as gang/device boxes, light housings, mechanical duct work flanges, access doors and varied apparatus are cleansed of oils and contaminants. Clean thoroughly with IPA 50/50 water solution prior to the Arcoplast sealant/finishing compound application.
7. MEP and various equipment subject to thermal cycling need to be reviewed with the various trades, equipment manufacturer and Arcoplast panel installer to ensure proper seal and application method.

Chapter Four : Handling, Transporting and Storing of Arcoplast Panels -


Proper handling and use of moving equipment will facilitate lifting, handling and the transport of Arcoplast composite panels. More importantly it will greatly decrease potential injuries and diminish material damages during handling, installation and transportation.

1. Arcoplast modular 9.5mm panel weigh an average 3.2 pounds per square feet and should be handled with sufficient manpower to ensure safe handling.
2. A protective 4mm plastic sheeting is factory applied to protect the Arcoplast panel from surface damage during handling, transporting and through the installation process.
3. Arcoplast modular 9.5mm panels are packaged and shipped in a closed wood crate to protect against freight and handling damages.

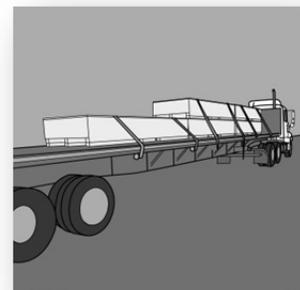


Arcoplast Modular Panel Installation Manual 2015

4. Average panel crate is approximately 4,000 lbs. (2,000) kilos. Caution – Ensure the lifting equipment capacity is commensurate to the load weights.

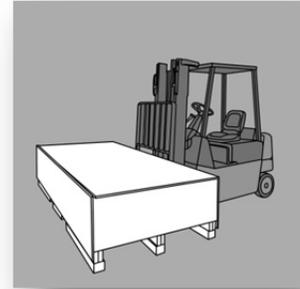

5. Panel crates are numbered and documented with content for easy and quick reference.
6. It is not recommended to handle crates from the ends, if required, safely use extended forks and ensure proper lifting capacity.
7. Panel crates exceeding 16'-0" in length should be handle with 2 handling units.
8. Arcoplast modular 9.5mm panels need to be acclimated to the intended service life for a minimum of 48 hours prior to start of installation.
9. Whenever possible move the entire shipping crate into the building. You may leave the Arcoplast panels in their original shipping container and remove top and sides to acclimate and for easy panel removal.
10. When removing the panels from the shipping crate to store in a dedicated holding area, ensure the panels are laid flat with the protective leaf between the panels as stored in the shipping crate.
11. When Arcoplast composite wall and ceiling panels are loaded individually on a project site, the panels should be stored on a flat wooden skid. Do not lay panels flat directly on the concrete surface.

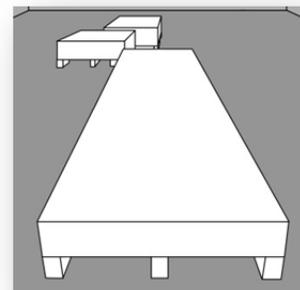


Arcoplast Modular Panel Installation Manual 2015

12. Protect Arcoplast panel edges from damage while stored on the job site by providing temporary barricade.
13. Arcoplast composite panels should never be stacked vertically against existing walls, columns, elevator shafts, etc.


14. Drywall handling cart is a very effective tool to move Arcoplast modular panels securely. Caution: Place rubber mats on the cart floor and rails for panel edge and face protection.



15. Vacuum holding cups are recommended for handling and positioning panel in place.

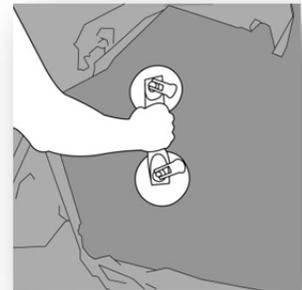


16. When lifting and carrying Arcoplast composite panel, always tilt panel to the handler's shoulder.

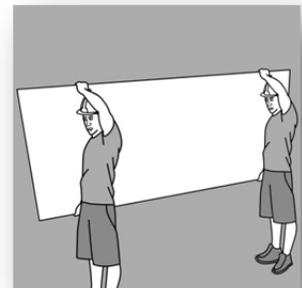

Arcoplast Modular Panel Installation Manual 2015

17. Do not handle Arcoplast panels that will generate a bow or sag in the panel, the stresses created by tension or compression could generate gel coat cracks.

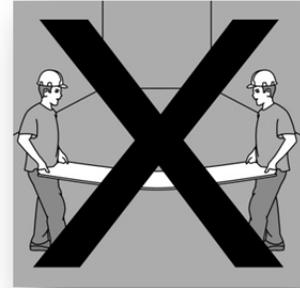

18. It is not recommended to load and store panels in the room prior to the installation. You will need access with scaffolds, drywall lifts and drywall carts. A clean and clear of obstacle floor space is the optimal job condition.

Chapter Five : Handling and Storing of Accessories and Chemical Products -

Arcoplast makes every effort to design its products to be user friendly and minimize any hazardous product exposure to humans, animals and the environment. However, some products may necessitate careful handling and application methods. Carefully review the MSDS when involved in handling and working with hazardous products.

Excess materials and empty containers must be disposed with conservation and environmental considerations. Consult the project manager to secure a proper room/locker for chemical products that may be required in the cleaning, preparation and installation of the Arcoplast panels.

1. Ensure MSDS sheets are posted for everyone to access and reference.
2. Ensure ventilation and fire suppression systems are present and functional.
3. Ensure proper cleaning station and proper disposal of waste material.
4. It is preferable to keep items such as adhesives, sealants, chemicals, accessories, tools and equipment under lock and key.



Arcoplast Modular Panel Installation Manual 2015

5. Caution: Do not use flammable products such as cleaners, primers, promoters and adhesives near open flames or high heat source such as work lamps, heaters, etc.,.




6. Post appropriate and regulatory compliance posters and labels when and wherever required.

Chapter Six : Steel Stud Framing, Furring Channels and Insulation Blankets -

Most large size projects will have a commissioned metal framing contractor supply and install the wall and ceiling steel stud or furring channels. However, it is not uncommon on smaller projects to have the wall and ceiling panel contractor accomplish this portion of the work.


Steel Stud Framing -

1. Ensure the location and installation of the framing members are consistent with the proposed panel layout.
2. Ensure metal gauge thickness, member spacing, reinforcements and blocking are compliant and in proper position.
3. Wherever possible, have the ceiling panel joint line up with the wall liner panel, this should be reflected in the metal framing layout for both wall and ceiling planes.

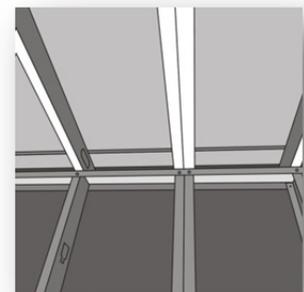


Arcoplast Modular Panel Installation Manual 2015

4. Review the design and type of floor base transition and elevation to ensure metal stud framing will correspond to the wall liner/partition panel installation requirements.
5. Steel stud and furring channel member recommended spacing is 16" (400mm) c/c rhythm with one additional framing member at every panel joint. The aluminum spline will be mechanically fastened to the first steel stud and the second steel stud provides reinforcement for the second panel edge and added protection against potential surface impact on that panel's edge.

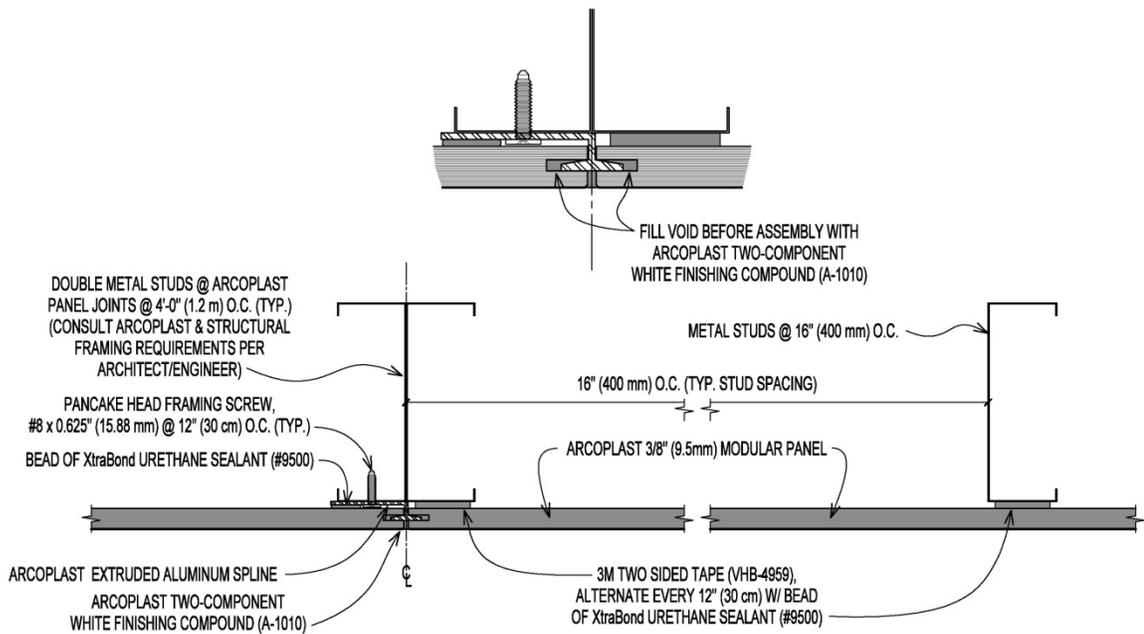

Arcoplast Modular Panel Installation Manual 2015

6. For aesthetics, end panels on wall run should not be less than 24" (600mm). Verify wall elevations for compliance.

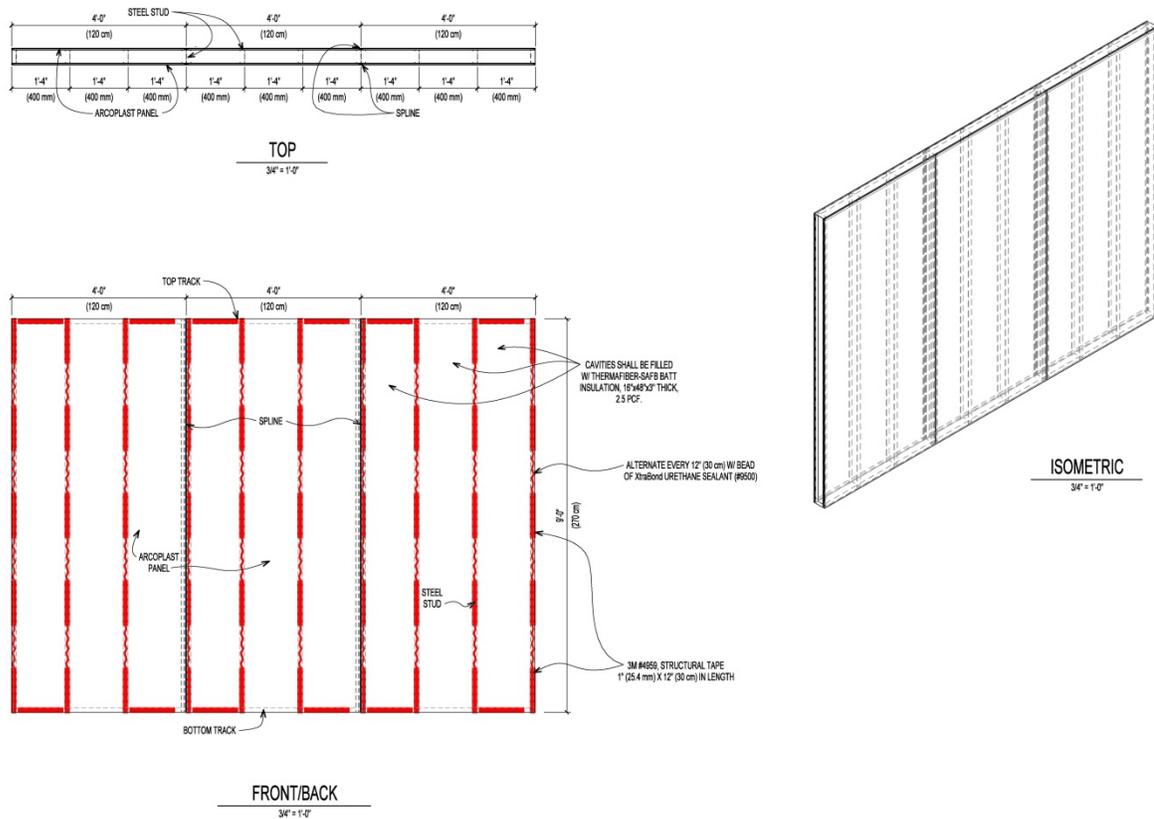


7. For increased strength, insert an additional steel stud at interior and exterior corner junctions, door and window frames and free standing openings.
8. Ensure the steel stud framing/ furring and metal strips are in compliance with the panel placement and layout for each wall elevation and reflected ceiling layout. Reference drawings for proper and accurate placement.




Arcoplast Modular Panel Installation Manual 2015

9. Ensure metal framing is secure, plumb and in alignment. Also verify control joint and slip connections are in compliance with the drawings.

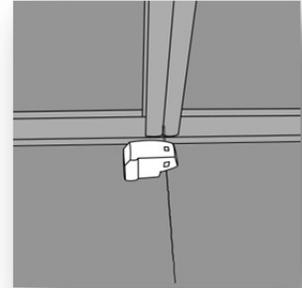

10. A 1 ½" steel carrier channel reinforcement inserted horizontally in the steel stud punch-outs on 4'-0" (1200mm) c/c is recommended to help maintain steel stud alignment, strengthen for lateral loads and provide hanger attachment for suspended ceiling framing grid assembly.

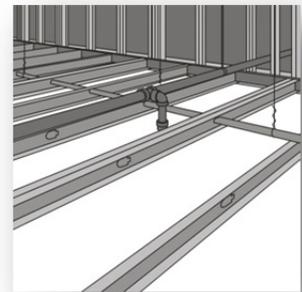


11. Verify opening dimensions, positions, alignments and locations for all MEP services, alarms and monitoring systems, fire suppression systems, etc. Note: The overall thickness of the Arcoplast wall and ceiling liner panel systems for the 3/8" (9.5mm) panel is ½" (12.5mm) from the face of the substrate (steel stud or furring channel) to the gel coat face finish of the Arcoplast panel.
12. Verify doorways and window and glazing units for placement, level/plumb accuracy and adequate spacing for panel insertion or panel abutting against door and window frame housing, processing and lab equipment.
13. Verify proper positioning of cutouts for laboratory equipment, through-wall embeds, airlocks, autoclave, cage wash equipment, etc.
14. Ensure that there are no components that would prohibit the allowable thickness tolerances, such as protruding screws, metal sliver, stud not well aligned, VHB tape folded, metal track, furring not well positioned or mouting out of steel stud and track that could potentially position the panel out of plane once installed.



Arcoplast Modular Panel Installation Manual 2015

15. Fasteners attaching steel studs to metal track, furring and metal strips, reinforcement and cross bracing as well as metal blocking must not protrude or exceed thickness of 1/8" (3mm) and 1/16" (1.6mm) depending on type of double face adhesive tape utilized.

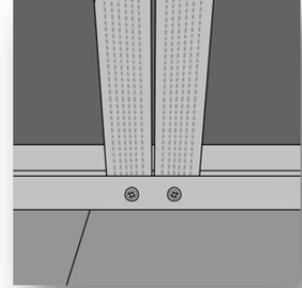


16. Consult with the project manager to ensure that all the services in each room have been approved for wall and ceiling panel installation, Ex. Mechanical, Electrical, Monitoring Alarms, Fire Suppression System, Lighting, Air, Gas, Pneumatics, etc.
17. Ensure control joints and slip connections are constructed at designated locations. Refer to architectural drawings for locations.
18. Remove oils, grease and contaminants on the metal framing members with appropriate degreaser. Consult manufacturer for recommended cleaning agents.
19. Proceed to wipe down with IPA 50/50 water mix solution and allow to dry thoroughly just prior to the application of the 3M primer and liquid adhesives.

20. Ensure that the sound attenuation blankets are properly in place and that they will not interfere with the Arcoplast modular panel installation. Insulation blankets may swell after time and could potentially interfere with Arcoplast modular panel bond to the substrate.



Arcoplast Modular Panel Installation Manual 2015

21. Consult with the project manager to ensure reinforcement backer plates are properly located and installed for MEP, accessories, equipment, guard rails, door and window blocking.

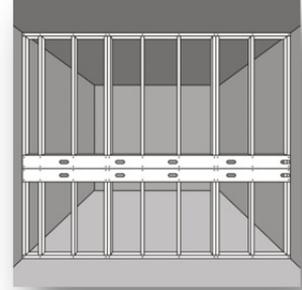


22. Ensure the reinforcement /blocking will not interfere with the Arcoplast panel and mechanical spline installation.
23. Report to the project manager any discrepancies and request corrective action before proceeding with the panel installation.



Arcoplast Modular Panel Installation Manual 2015

Steel Hat Furring Channel –

1. Furring channels for wall and partition surfaces are generally installed vertically on 16" (400mm) c/c rhythm spacing and doubled at each Arcoplast modular panel joints on 4'-0" (1200mm) c/c.

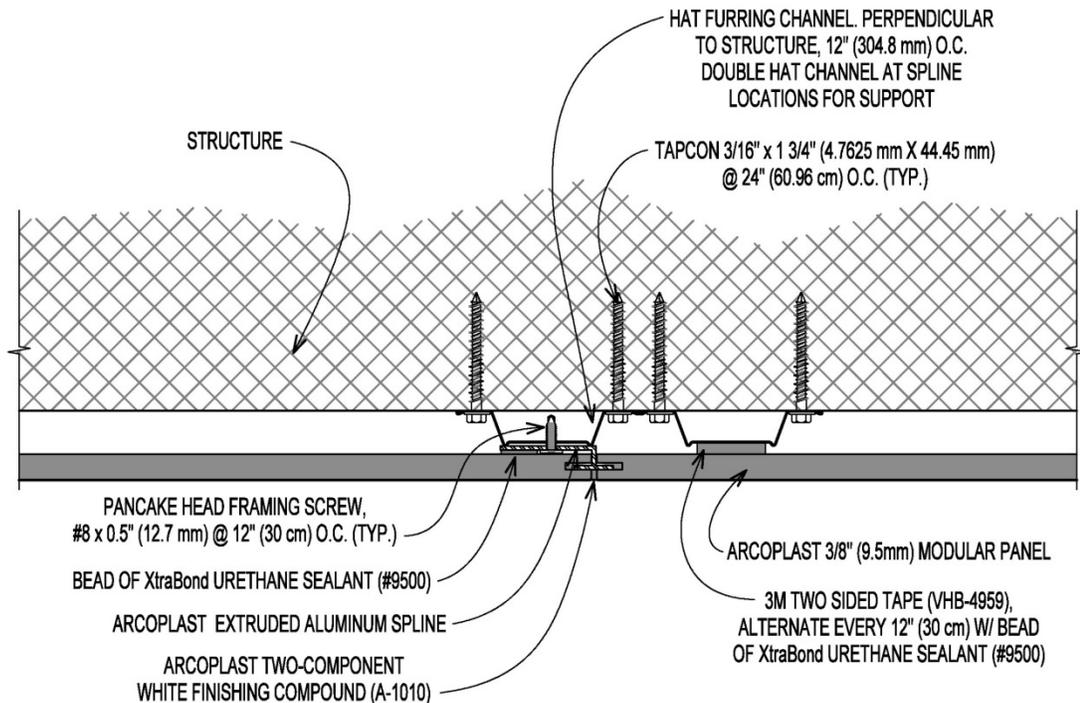

2. Install furring channels horizontally at floor and at the termination strip height for the base of the panel and termination strip reinforcement. Fasten at 16" (400mm) c/c with proper mechanical fastener to suite substrate.
3. Ensure that fastening system will not interfere with the mechanical spline attachments and 3M VHB tape.
4. With a clean cloth and proper cleaning agents remove oils, grease and contaminants on the metal framing members. Consult manufacturer for recommended cleaning agents.




Arcoplast Modular Panel Installation Manual 2015

5. Proceed to wipe down with IPA 50/50 water solution and allow to dry thoroughly just prior to application of primer for 3M tape and liquid adhesive.
6. Arcoplast modular ceiling panels can be installed parallel or perpendicular to the furring strips. However maintain a 16" (400mm) c/c interval. It is not required to double the furring channel when the panel is installed perpendicular to the furring strips.


Masonry wall/ Poured Concrete -

1. Masonry blocks and poured concrete wall systems should be plumb, level and in plane. Grouted joints should be flush and not hinder the installation of the Arcoplast composite panels and the aluminum spline.
2. Inquire to the project manager if the masonry bloc will have a surface coat that will provide a sound base for tape and liquid adhesion. Refer to test panel for substrate compatibility.
3. High performance coatings and paints vary considerably in surface tension. Ensure proper bond strength and primer/promoter compatibility prior to the 3M VHB tape and liquid adhesives.
4. Ensure door and window frames, through-wall embeds and lab equipment are clean and free of cement grout and foreign particulates that could interfere with the Arcoplast panel installation and prevent the smooth tooling of the Arcoplast finishing compound.
5. Mechanical fasteners for the aluminum spline and the J starter strip molding will require a plastic shield and flat head metal screw, typical # 10 screw with a # 8 to10 plastic shield. You must first predrill the aluminum spline and the J starter strip to receive the flat head metal screw. With the aluminum spline and the J starter strip as a template, mark the location for the plastic shield. Remove the aluminum spline from the panel kerf and with a 3/16" (4.5mm) concrete / masonry bit drill the locations marked for the plastic shield. Proceed to insert the plastic shields and re-position the aluminum spline matching with the plastic shield inserts and fasten with the mechanical screws.

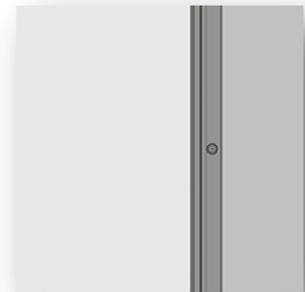


Arcoplast Modular Panel Installation Manual 2015

6. If the integrity of the existing surface finishes are in doubt or the adhesive tests are not satisfactory, it is then recommended to install a continuous 2 ½" (63mm) x 16 gauge continuous flat galvanized metal strip vertically at every 16"(400) c/c. Fasten with appropriate anchor and fastener.

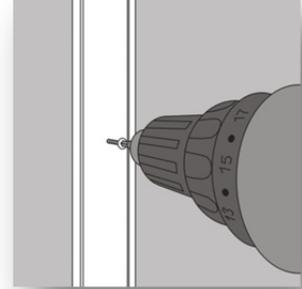


7. At every panel joint, 4'-0" (1200mm) c/c, ensure the continuous 2 ½" (63mm) x 16 gauge galvanized flat metal strip installed does not interfere with the aluminum spline molding for the panel joint. The metal strip should be installed flush to the panel edge and abutting to the aluminum spline.

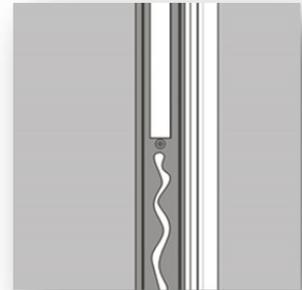


8. Prior to the installation of the metal strip, remove oils, grease and contaminants on the metal framing members. Consult the steel manufacturer for recommended degreasing agents.
9. Proceed to wipe down with IPA 50/50 water solution and allow to dry thoroughly prior to application of primer for 3M tape and liquid adhesive.

10. Fasten the 2 ½" (63mm) x 16 gauge galvanized metal strip with two beads of continuous liquid adhesive and mechanically fasten the metal strip with concrete fasteners 3/16" 4.7mm) x 1 ¼" (31mm) on 16"(400) c/c.



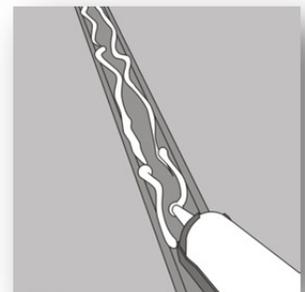


Arcoplast Modular Panel Installation Manual 2015

11. Ensure fasteners do not protrude more than 1/16" (1.6mm) from the metal strip surface as this will prevent the backside of the panel from making contact with the 3M VHB # 4956 tape of 1/16" (1.6mm) thick.

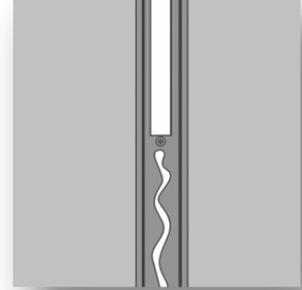


12. Apply the 3M VHB # 4956F double face tape and liquid adhesive on the vertical strips alternated on 12" (300mm) c/c.

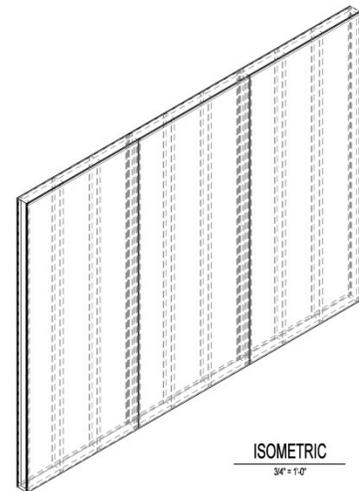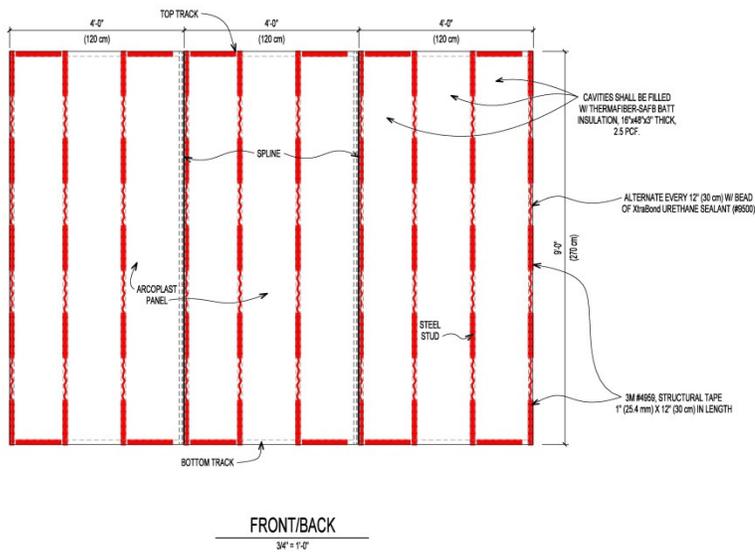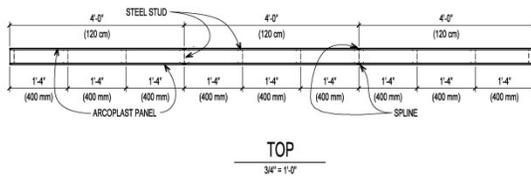

Arcoplast Modular Panel Installation Manual 2015

13. Proceed with the panel installation as described in Chapter 11.
14. Fasten Arcoplast panel mechanically with 3/16" (4.5mm) x 1-1/4" (45mm) concrete screw such as Tapcon or Rawl type fasteners. Use a White color Philips concrete flat head screw below the floor base line, at ceiling line and interior/exterior junctions. Countersink panel and fastened with concrete screws. Verify that the Arcoplast finishing cove application at the ceiling line and interior/exterior junction will cover the countersunk screws, if necessary, increase the spoon size to yield a larger radius or prefill the screw heads as mentioned in the next step.

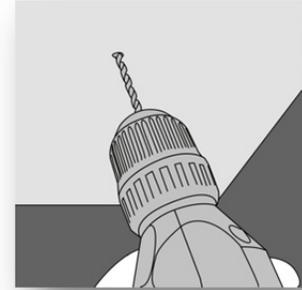

15. You may have to pre-fill the countersunk screw heads if your countersink hole is too close to the featheredge of the finishing compound and leaves a print. This can be done by applying (pre-filling) the countersink screw head with a dab of Arcoplast finishing compound and tooled flat with a putty knife. Ensure that there is no residual film left on the gel coat surface and clean thoroughly with the Thermaclean cleaner. Pre-filling should be completed 24 hours prior to the application of the finishing compound in the cove section.

Existing / New Drywall Application -


Arcoplast modular panels can be installed over new or existing gypsum board / drywall construction. However, because of the weak bonding substrate, Arcoplast requires the installation of a flat metal furring strip over the gypsum board.

1. Ensure the existing painted surfaces are well cleaned and free of dust and contaminants.
2. Whenever building codes require a fire rated gypsum wallboard on the wall and ceiling planes, a flat metal furring strip should be installed prior to the installation the Arcoplast modular panel.



Arcoplast Modular Panel Installation Manual 2015

3. Preceding the installation of the Arcoplast wall panel, install a continuous #16 gauge galvanized flat metal furring strip 2 ½" (63mm) in width by required length. Fasten the flat metal strip with two beads of continuous liquid adhesive and then mechanically fastened with metal screws through the gypsum board and the metal framing.

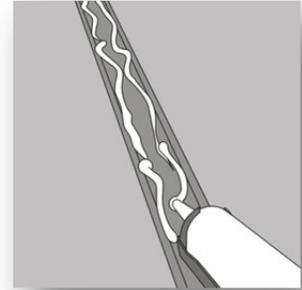


4. Ensure the fastening screws do not protrude more than 1/16" (1.6mm) from the metal strip surface as this will prevent the backside of the panel from making contact with the 3M VHB # 4956F tape of 1/16" (1.6mm) thick.
5. The metal strip should be installed over the existing framing members on 16" c/c (400mm).




Arcoplast Modular Panel Installation Manual 2015

- At the completion of the metal strip installation apply the 3M VHB # 4936F double face tape and liquid adhesive on the vertical strips alternated on 12" (300mm) c/c.

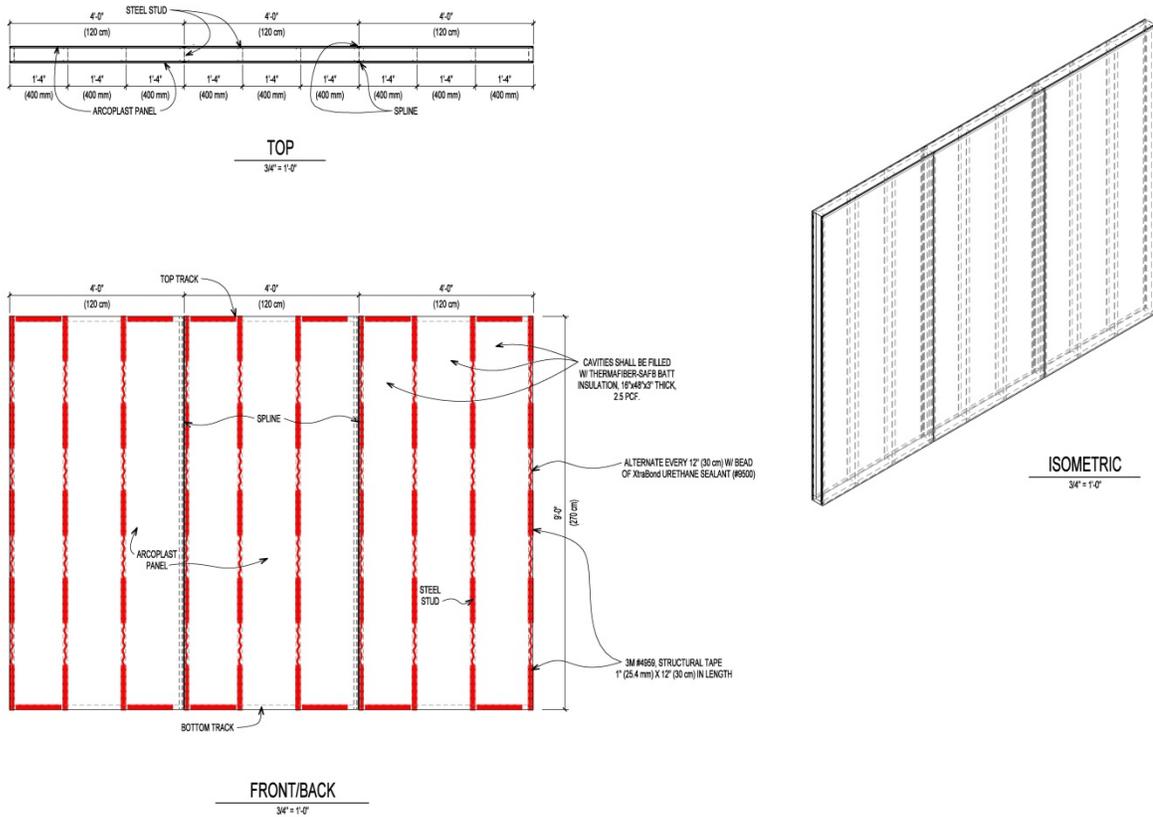

Arcoplast Modular Panel Installation Manual 2015

- At every panel joint, 4'-0" (1200mm) c/c, ensure the continuous 2 1/2" (63mm) x 16 gauge galvanized flat metal strip installed does not interfere with the aluminum spline molding for the panel joint. The metal strip should be installed flush to the panel edge and abutting to the aluminum spline.

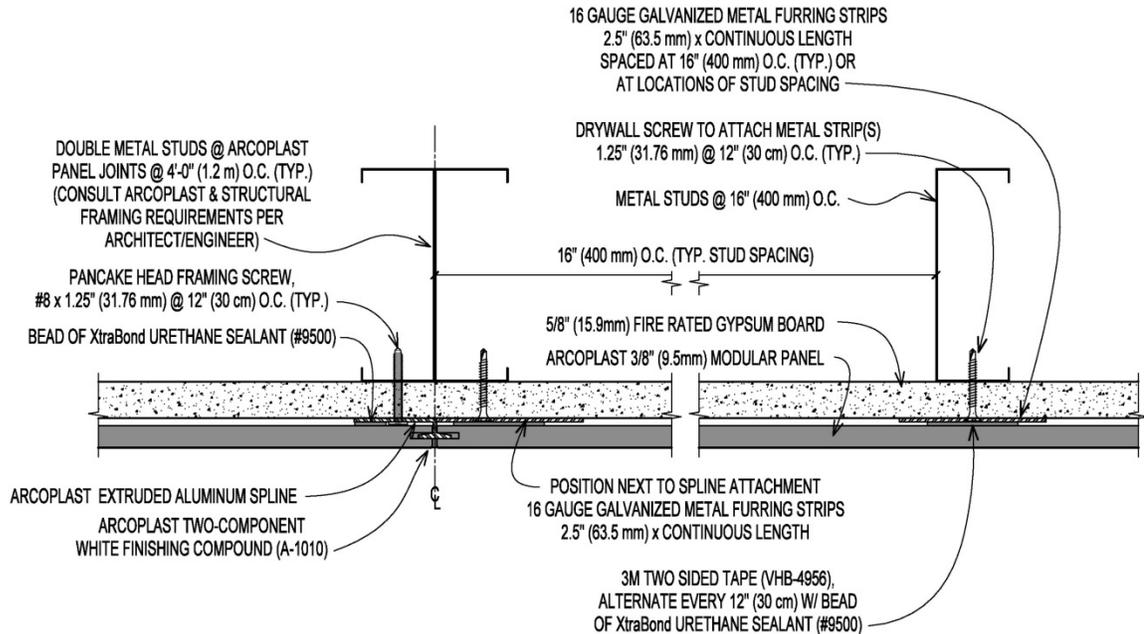

- Remove oils, grease and contaminants on the surface of the flat metal furring strip. Consult the metal manufacturer for recommended degreasing agents.
- Proceed to wipe down with IPA 50/50 water solution and allow to dry thoroughly prior to application of the primer for 3M VHB tape adhesive.
- Fasten the Arcoplast panel with mechanical fasteners below the floor base line, at the ceiling line and interior/exterior corner junctions. Countersink the panel and fastened with fine self-drilling drywall screws. Verify that the Arcoplast finishing cove application at wall to ceiling and wall to wall (interior corners) will cover the countersunk screws, if necessary, increase the spoon size to yield a larger radius or prefill the screw heads as mentioned in the next step.
- You will need to pre-fill the countersunk screw heads if your countersink hole is too close to the featheredge of the finishing compound. This can be done by applying (pre-filling) the countersink screw head with a dab of Arcoplast finishing compound and tooled flat with a putty




Arcoplast Modular Panel Installation Manual 2015


knife. Ensure that there is no residual film left on the gel coat surface and clean thoroughly with the Thermaclean cleaner. Pre-filling should be completed 24 hours prior to the application of the finishing compound in the cove section.

Existing Ceramic Surfaces -

1. Ensure the existing ceramic surface is sound and well bonded to the substrate.
2. Providing the ceramic surfaces are sound and well bonded to the masonry/concrete, Arcoplast modular panels can be installed directly over the ceramic finishes.
3. Thoroughly clean ceramic surfaces with IPA 50/50 water solution and allow to dry thoroughly.
4. Proceed with the bond test to validate the type of primer/promoter to be used.

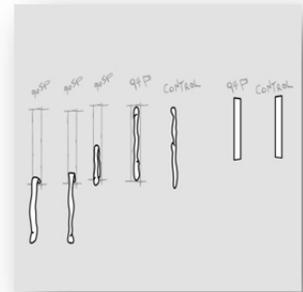


5. Apply the primer to the ceramic substrate with a 1" (25mm) brush and proceed to install the 3M # 4959 VHB tape immediately.
6. Apply the 3M # 4959 VHB tape vertically on 16" (400mm) apart and on 12" (300mm) alternated with a 3/8" (9.5mm) bead of liquid adhesive. Leave the film protector on the VHB tape at this time. With a two hand roller apply pressure throughout the tape to ensure good surface contact.

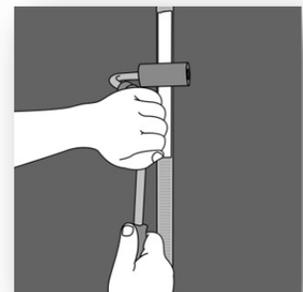


Arcoplast Modular Panel Installation Manual 2015

7. Fasten the Arcoplast panel with concrete screws 3/16" (4.5mm) x 1-1/4" (45mm) such as Tapcon or Rawl fasteners. Preferably use a White color Philips concrete flat head screw below the floor base line, at ceiling line and interior/exterior junctions. Countersink panel and fastened with concrete screws. Verify that the Arcoplast finishing cove application at wall to ceiling and wall to wall interior corners will cover the countersunk screws, if necessary, increase the spoon size to yield a larger radius or prefill the screw heads as mentioned in the next step.

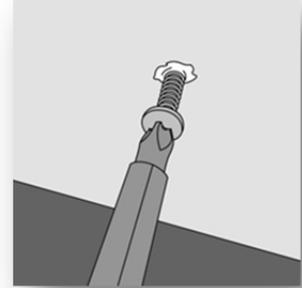

8. You may have to prefill the countersunk screw heads if your countersink hole is too close to the featheredge of the finishing compound and leaves a print. This can be done by applying (pre-filling) the countersink screw head with Arcoplast finishing compound and tooled flush with a putty knife. Ensure that there is no residual film left on the gel coat surface and clean thoroughly with the Thermaclean cleaner. Pre-filling should be completed 24 hours prior to the application of the finishing compound in the cove section.

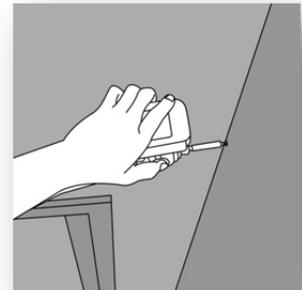


Existing Metal Wall Cladding -

1. Ensure the existing metal surface are well bonded or mechanically fastened to the substrate.
2. Arcoplast modular panels can be installed and directly attached over smooth or lightly grooved painted, galvanized and stainless steel metal finishes.
3. Thoroughly clean metal surfaces with IPA 50/50 water solution and allow to dry thoroughly prior to the application of the 3M primer.
4. Complete bond test to validate the type of primer and adhesive to be used.



Arcoplast Modular Panel Installation Manual 2015


5. Apply the 3M VHB tape primer to the metal surfaces. Allow adequate drying time and proceed to install the 3M # 4959 VHB double face tape immediately. Do not remove the film protector on the VHB at this time. With a two hand roller, apply pressure throughout the tape to ensure good surface contact.

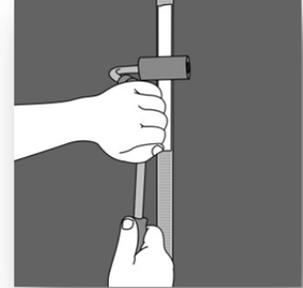

6. Apply the 3M #4959 VHB tape and 3/8" (9.5mm) liquid bead of adhesive on vertical spacing of 16" c/c (400mm) rhythm with the 3M VHB tape and liquid adhesive alternated on 12" (300mm) c/c.
7. At the ceiling line and interior/exterior junctions countersink panel and fastened with flat head metal screws. Verify that the Arcoplast finishing cove application at wall to ceiling and wall to wall interior corners will cover the countersunk screws, if necessary, increase the spoon size to yield a larger radius or prefill the screw heads as mentioned in the next step.
8. It may also require the pre-filling of the countersunk screw heads if your countersink hole is too close to the featheredge of the finishing compound and leaves a print. This can be done by applying (pre-filling) the countersink screw head with Arcoplast finishing compound and tooled flat with a putty knife. Ensure that there are no residual films left on the gel coat surface and clean thoroughly with the Thermaclean cleaner. Pre-filling should be completed 24 hours prior to the application of the finishing compound in the cove section.
9. Proceed to countersink and fasten the Arcoplast panel below the floor base height with # 6 x 1 1/4" (31mm) self-drilling drywall screws 16" (400mm) c/c. Fill the screw head with finishing compound and tool flush with a putty knife to eliminate print thru in the floor coving material.



Chapter Seven : Integrated Aluminum Window Housings

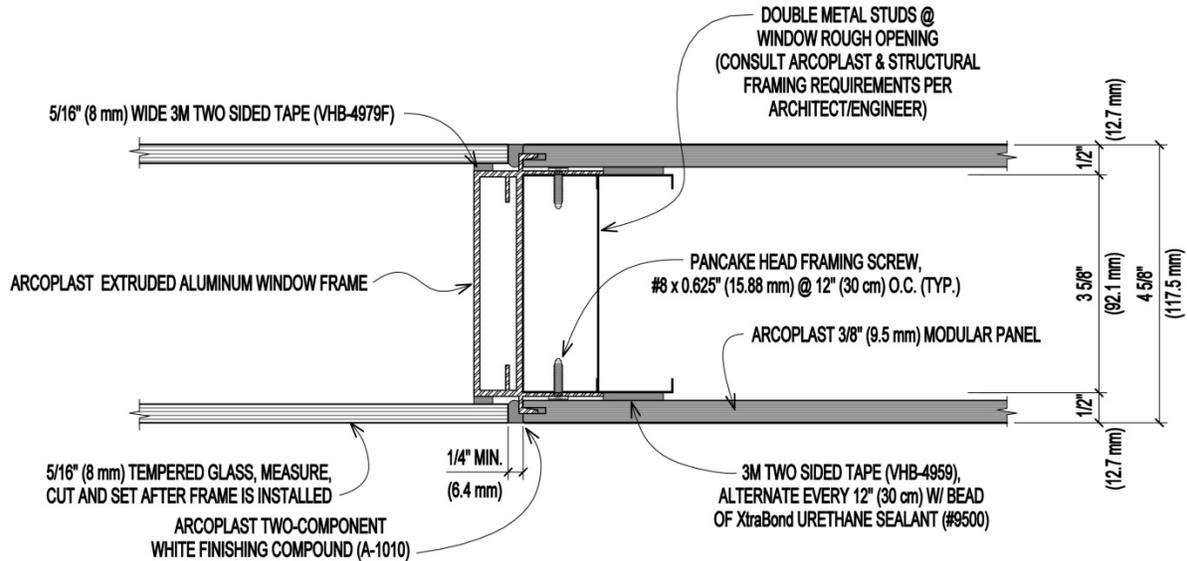

Innovative extruded aluminum housing sections enables a flush window glazing application integrated with the Arcoplast modular barrier panel system.

Note: Arcoplast extruded aluminum frame sections can be ordered and shipped pre-assembled. However for reasons of scheduling, assembly, crating and freight cost, it may be advantageous for the client to receive the frame in stock lengths and assembling the frame on job site.

Arcoplast aluminum window extrusion options:


- A. Extruded aluminum frame shipped in stock length to suit user requirement.
- B. Extruded aluminum frame pre-cut to desired length.
- C. Extruded aluminum frame factory pre-assembled, crated and shipped for easy on-site installation.



Arcoplast Modular Panel Installation Manual 2015


On-site assembly procedure:

1. The header and sill are cut to desired glazing opening, typically to match Arcoplast modular panel width 47 15/16". However, the aluminum window extrusions can be cut to any dimension and can be mounted in a standard 3 5/8" (92mm) metal or wooden stud system. Note: A carbide 100 tooth x 12" diameter saw blade with a 4000 RPM miter saw will provide the best results.

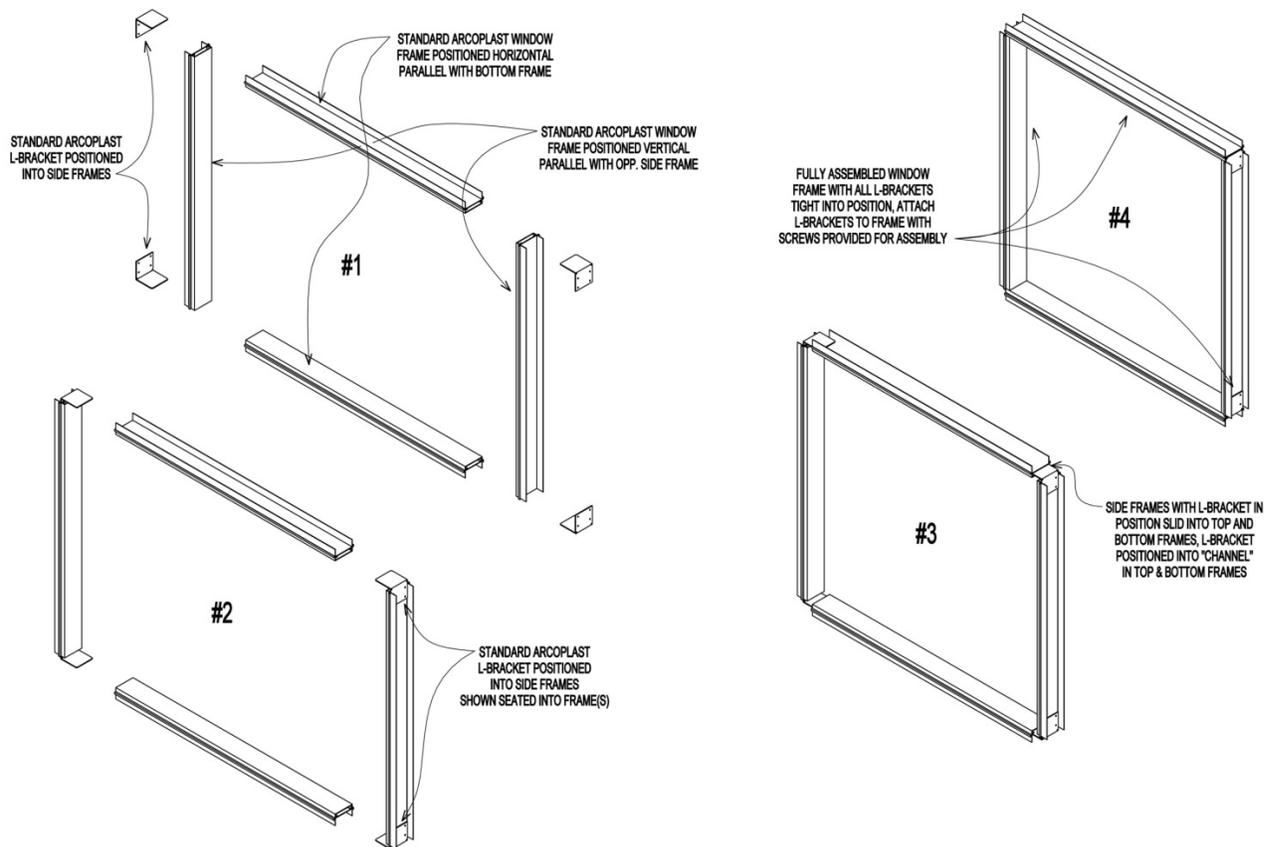


Arcoplast Modular Panel Installation Manual 2015


2. Proceed to cut both right and left jamb sections to required length (height) for the desired glazing dimension.
3. In the center of the left and right jamb extrusion, drill a weep hole 1/6" (1.6mm) diameter. Note: Drill only the face side of the wall cavity, this weep hole will allow any moisture build-up between the glazing panes to be absorbed by the silica dessicant packs that will be stored in the extrusion wall cavity.

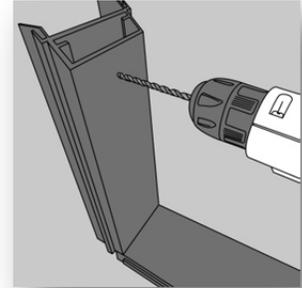

4. Insert corner brackets (non-drilled leaf section) in the slotted portion of the extrusion - sill and header members only.

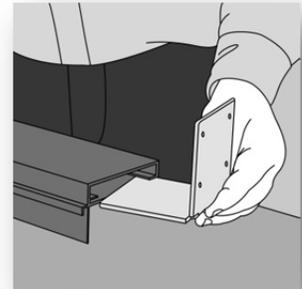


5. Ensure the brackets are well inserted and snug at the end cuts.

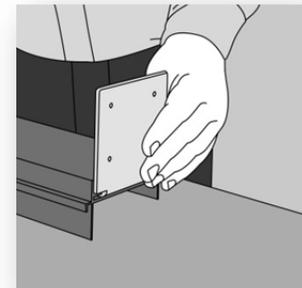


Arcoplast Modular Panel Installation Manual 2015


6. Turn the top header and sill extrusion over and drill 2 pilot holes 1/8" (3mm) through the back of the extrusion and through the steel corner bracket. Prefill the drill holes with sealant and secure in place with two # 8 x .0625 self drilling ultra thin wafer head screws.

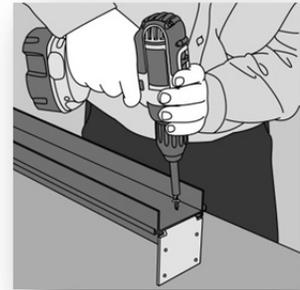

7. Proceed to dry fit both left and right jamb to the sill and header extrusions. When ensured a good and accurate fit, proceed to apply a bead of adhesive/sealant # 410/19 GB Grey Acrylic on one end of the left and right jamb extrusion.

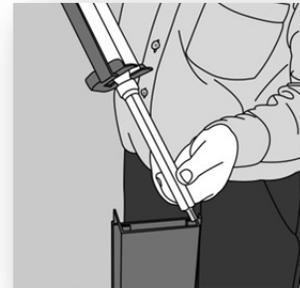

8. Place both left and right jamb sections on the sill extrusion and secure temporarily with hand grips. Ensure the window housing corners section are square.

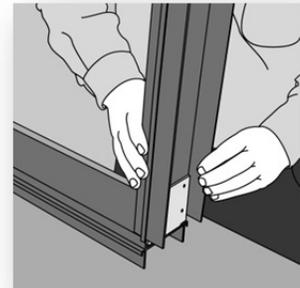

Arcoplast Modular Panel Installation Manual 2015


9. With a drill bit, drill 4 pilot holes 1/8" (3mm) through the first wall extrusion in the predetermined hole locations of the corner bracket. Pre-fill the drill holes with the adhesive/sealant 410/19 GB Grey two component acrylic and fasten the sill corner bracket to the jamb extrusion with 4 - # 8 x .0625 self drilling ultra thin wafer head screws.



10. Silica dessicant packs are required for the aluminum window housing with double glazing seal application. Note: Single glazing window unit do not require silica dessicant moisture absorbent packs. A total of (8) packs are required in each jamb section (left and right) for a typical 4'-0" x 4'-0" (1.2m x 1.2m) square opening. If there are many variable openings, contact technical services for estimated quantities per window frames.




11. Insert the silica dessicant packs in the cavity of both the left and right jamb.

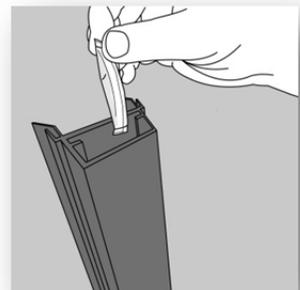


Arcoplast Modular Panel Installation Manual 2015

12. Proceed to apply a bead of adhesive/sealant # 410/19 GB Grey Acrylic on the remaining end of the left and right jamb extrusion.

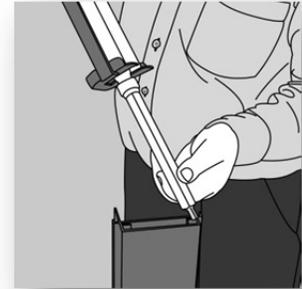

13. Complete the assembly by positioning the header over the left and right jamb sections. Secure to the header extrusion temporarily with hand grips. Ensure the window housing is align and square. Proceed to drill 4 pilot holes 1/8" (3mm) through the first wall extrusion in the predetermined hole locations of the corner bracket. Pre-fill the drill holes with the adhesive/sealant 410/19 GB Grey two component acrylic and fasten the header corner bracket to the jamb extrusion with 4 - # 8 x .0625 self drilling ultra thin wafer head screws.

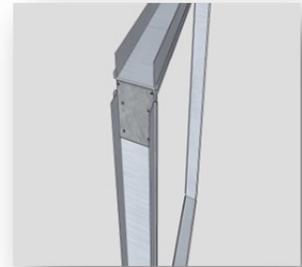

14. Remove all exuding sealant and clean thoroughly.
15. Allow 24 hours for the frame corner brackets to weld securely and ensure the window frame is stored temporarily in a plumb and square position.

16. Position in place, plumb, level and square the pre-assembled window frame and secure the frame's left and right jamb extrusion to the steel stud by fastening through the face of the extrusion to the steel stud member with # 8 x .0625 self drilling ultra thin wafer head screws.



Arcoplast Modular Panel Installation Manual 2015

17. With the window frame positioned in place and at the right height, proceed to install the steel stud in the header and sill extrusion members. Secure the window extrusion to the steel stud at the header and sill member by fastening through the face of the extrusion to the steel stud member with # 8 x .0625 self drilling ultra thin wafer head screws.



With the completed window housing installation, proceed with the Arcoplast modular panel installation as described in Chapter Twelve. The plate glass installation is best suited after the panel installation. Refer to Chapter Thirteen for installation.



Chapter Eight : Surface Preparation & Supplies -

Surface preparation and cleaning materials -

1. Degreaser – new metal framing members have traces of oils and grease. Consult the metal fabricator for recommendations on degreaser product and application method. After removing oils, grease and contaminants clean with IPA with 50/50 water mixture and allow to dry thoroughly.
2. Isopropyl Alcohol (IPA) is available at most retail stores, it is usually a 70/30 mixture of IPA and water. Mix the IPA with water 50/50. This will allow more time for your cleaning process before the product dissipates. This mixture is also used to clean the Arcoplast back side of the panels and existing substrates such as the steel stud framing members, furring strips, painted and ceramic surfaces.
3. Use a spray bottle with IPA mixture, mist spray surfaces to be cleaned and wipe dry with a clean cloth.



Arcoplast Modular Panel Installation Manual 2015

4. Cleaning towels – rough surfaces will require a cotton cloth and smooth surfaces can be cleaned with disposable wipes.
5. Personal protective equipment, gloves and eye wear are required.
6. Caution: Do not use cleaning products near open flames or high heat source such as work lamps, heaters, etc.

Chapter Nine : Fastening Systems & Supplies -

Arcoplast modular panel primer, adhesive and fasteners -

Primers, adhesives and fasteners for the Arcoplast modular wall and ceiling panel installation.

1. 3M Adhesion Promoters
 - a. 3M # 94 - a clear liquid primer used to promote adhesion of 3M VHB tapes to the back side of Arcoplast panels and metal substrates such as steel studs, furring channels and metal strips. Primer # 94 is available in quart and gallon size container.
 - b. 3M # P591 black liquid primer is a low viscosity adhesion promoter recommended for use on aluminum framing members, back side of the Arcoplast modular panels and difficult surfaces to bond to. Primer P591 is available in 8.4 US fl. oz. (250ml) metal container.
 - c. 3M # 90 HD spray adhesive promoter used to enhance the bond of 3M VHB tapes to masonry substrates. 90 HD spray is available in spray can, net weight 17.6 oz. (500 g).

Caution: Do not use primers, promoters near open flames or high heat source such as work lamps, heaters, etc.

2. Adhesive
 - a. Liquid adhesive – Modified Polyurethane adhesive one component fast cure is used to bond the Arcoplast modular panel to existing substrates such as metals, gypsum board, masonry/concrete, ceramic and metal finishes. Available in 10oz cartridges and 5 gallon containers. Low VOCs - Color White.
 - b. 3M VHB tape
 1. 3M #4959 double face acrylic foam tape (White) 1/8” (3mm) thick x 1” (25mm) wide in rolls of 36 yards is used to bond and provide immediate fixture time for the Arcoplast modular panel.



Arcoplast Modular Panel Installation Manual 2015


2. 3M # 4956 double face closed cell acrylic foam tape (Dark Grey) 1/16" (1.6mm) x 1" (25mm) wide in rolls of 36 yards is used to bond and provide immediate fixture time for the Arcoplast modular panel to the 2 1/2" (63mm) wide metal strip that is mechanically fastened to gypsum board and masonry/concrete wall and ceiling structures.
 3. 3M # 4936F double face closed cell acrylic foam (Dark Grey) 1/16" (1.6mm) x 1/2" (12.5mm) wide in rolls of 72 yards is used to bond the termination strip to the Arcoplast modular panel at the floor/curb junction.
3. Mechanical attachment
 - a. Aluminum spline for Arcoplast panel seams – continuous aluminum mill finish extrusion with T intersection fitting in the Arcoplast panel kerf keeping the two panels in plane and secure by the extended dog leg fastened mechanically to the existing substrate. The standard 3/8" (9.5mm) spline is used for the standard 3/8" (9.5mm) thick Arcoplast modular panel and 1/2" (12.5mm) spline for the 1/2" (12.5mm) Arcoplast modular panel. Standard aluminum spline length 9'-0" (2.75m). The aluminum spline is installed at every Arcoplast panel seam and can be fastened to a variety of substrate with the appropriate fasteners.
 - b. Aluminum J starter trim is a continuous aluminum mill finish extrusion shaped in a J form. This aluminum starter trim is used for supporting the end of panels (top or bottom), above floor coves, at the start of wall runs, door and window frame junctions, and wherever a concealed and continuous panel fastener is required. The long dog leg section is attached mechanically to the substrate such as metal framing sections, masonry/concrete, gypsum board, ceramic and metal wall liners. The Arcoplast modular panel with the panel edge kerfed is inserted in the small leg portion to the starter trim. Dimension – 3/8" (9.5mm) for the standard 3/8" (9.5mm) thick Arcoplast modular panel and 1/2" (12.5mm) for the 1/2"(12.5mm) x 9'-0" (2.75m).
 4. Fasteners
 - a. Ultra-thin wafer head screws – Modified truss head Philip self-drilling screw hardened zinc plated and baked. Dimension # 8 x .0625" for fastening the aluminum spline and aluminum starter trim piece. The screw tip is designed to drill into the aluminum trim and existing substrates such as metal strips, steel stud framing members and furring channels. The ultra-thin wafer head screw provides the precise thickness allowance enabling the panel, when position over the screw heads, to glide directly into the spline/starter strip short dog leg.



Arcoplast Modular Panel Installation Manual 2015

- b. Flat head metal screws with plastic anchors - #10 x 1-1/4" (32mm) Philips flat head zinc plated screw used to fasten aluminum spline, aluminum starter trim and galvanized 2 1/2" (63mm) metal strip to existing substrate such as masonry/concrete walls.
- c. Concrete fastener such as Tapcon or Rawl – 3/16" (4.5mm) diameter x 1-3/4" (45mm) long, coated finish color White. The Philip flat head screw is designed for existing substrate such as masonry/concrete.
- d. Drywall self-drilling screws - #6 x 1-1/2" (38mm) self-drilling fine thread Philip head screws is used to attach the Arcoplast modular panel to the existing substrates. Design to drill into the metal strips, steel stud framing members and furring channels.

Prior to the adhesive application, verify and ensure the bond strength to the substrate and the Arcoplast panels. When uncertain as to the proper selection of primer/promoter, adhesive and fasteners, select a test method and a test area on the substrate. Proceed with a mock-up sample testing the proposed primer/promoter, adhesives and fasteners to evaluate and determine the best bond and peel strength and select the best product and application method.

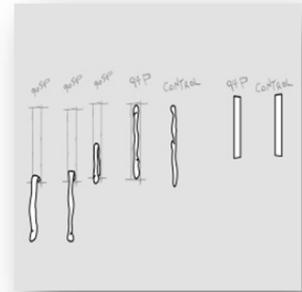

Document and record the peel strength of the tape and adhesive beads. Preferably a cohesive failure is the best expected result.

1. Room temperature 60°F to 80°F (15°C to 24°C) is recommended for the application of 3M VHB tapes and liquid adhesives.
2. Field test the primer, adhesive and fasteners per manufacturer's recommendation. Record and document for working time, application time and cure time.
3. Different substrate may require different primers thus enforcing the need to test each substrate for surface adhesion compatibility.
4. Determine the peel strength by use of simple tools and repeat the same technique for all test coupons.
5. A minimum of two test coupons for each different substrate is required.
6. Results for the primer and adhesive test (tape & liquid) to be submitted to the project manager for approval.
7. Note: If the bond strength is not suitable for the substrate, contact Arcoplast technical services.



Arcoplast Modular Panel Installation Manual 2015


3M VHB Double Face Tape Application -

1. Apply the 3M VHB tape onto the substrate (existing surfaces) on which the Arcoplast panel will be bonded to.
2. Metal framing members, clean substrate thoroughly with proper degreaser. Remove oil, dust and chemicals, with Isopropyl Alcohol (IPA) 50/50 water mixture and allow to the surface to dry thoroughly.
3. For painted surfaces clean and wipe down with damp cloth with IPA 50/50 and water mixture and allow surface to dry thoroughly. Note: For new or existing drywall substrate, refer to Chapter 6, Section Existing/New Drywall Application, and item 1 through 12 inclusively for proper procedure for the application of the 3M double face tape.
4. For new masonry, brick and concrete walls, brush surfaces to remove any loose particulates and remove all dust by vacuum and wipe down with damp cloth.
5. When installing Arcoplast modular panels over existing masonry/concrete walls that have old and decayed paint, ensure the surface is scraped or sandblasted to remove loose paint chips and particles. If this procedure proves environmentally challenging or cost prohibitive, refer to metal strip furring as described in Chapter 6, section Masonry Wall/ Poured Concrete items 6 -15 inclusively.
6. On the back side of the Arcoplast panel, remove all glass-fiber dust generated by panel cuts and clean thoroughly with IPA and 50/50 water mixture and allow the surface to dry thoroughly.
7. Apply primer to both areas, on the substrate and on the back side of the Arcoplast modular panel where the 3M VHB tape will come in contact. Note: Different substrates may require different primer/promoter – refer to trial adhesion test mock-up.
8. When using and applying the 3M VHB tape always keep the roll of tape well protected to prevent surface contamination which will greatly reduce the bond strength.



Arcoplast Modular Panel Installation Manual 2015

9. On steel stud framing members, horizontal floor and ceiling tracks, furring channels, metal strips and cross brace framing members, alternate the 3M VHB tape with the liquid adhesive 12" (300mm) c/c.

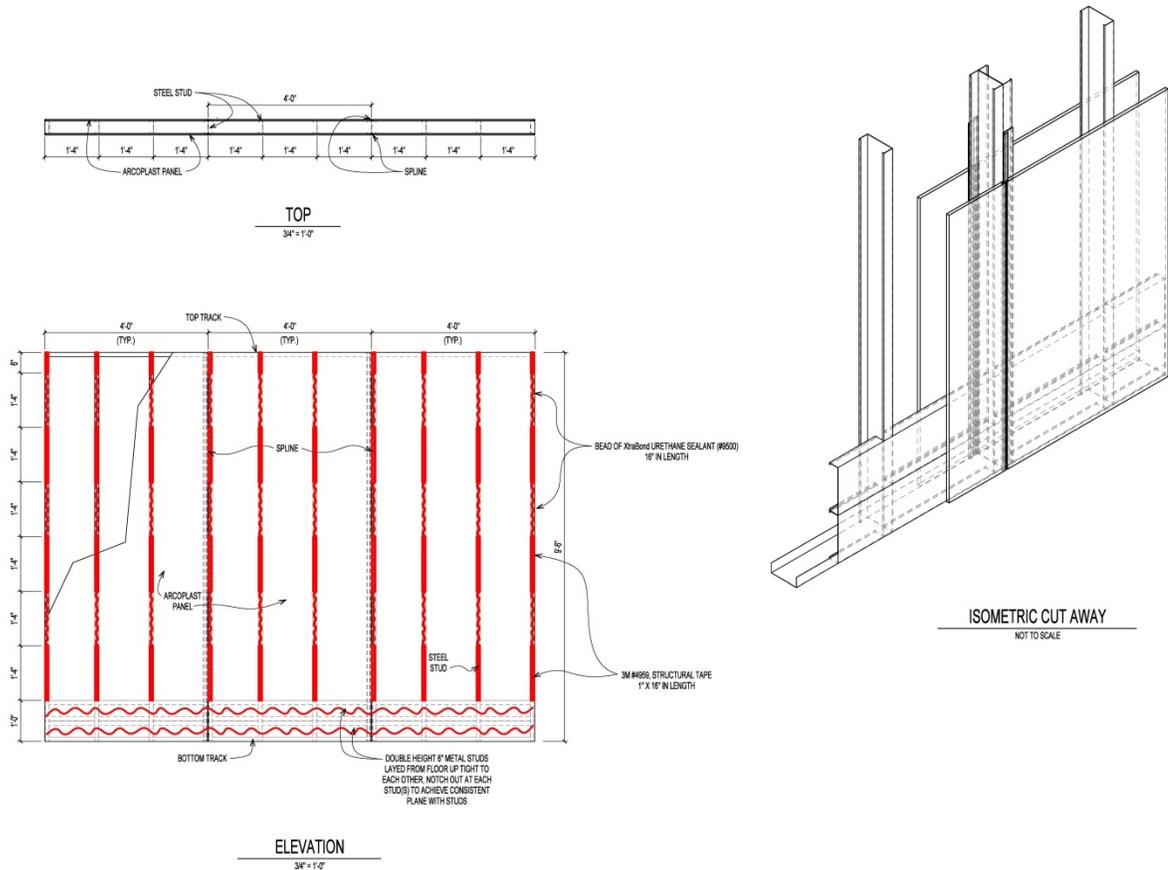


10. On solid substrates such as ceramic, glazed bloc, epoxy coated masonry or poured concrete, apply the 3M VHB tape on 16" (400mm) c/c and alternate the 3M VHB tape and liquid adhesive 12" (300mm) c/c.



Arcoplast Modular Panel Installation Manual 2015


- To apply the 3M VHB tape to the substrate, remove the clear protective tape on one side only. Position in place and apply moderate pressure with a two hand roller and proceed to roll the 3M VHB tape to ensure full contact and adhesion.

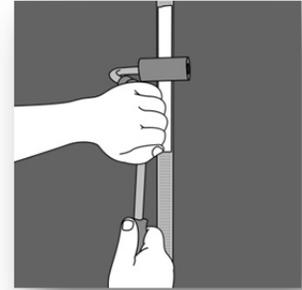

- At this time, on the face side of the 3M VHB tape, leave the clear film protector one. Note: Only remove the face protective clear film just prior to the panel installation.


Liquid adhesive -

- On metal framing members remove oil, grease and contaminants with appropriate degreaser. Complete with a final wash using IPA 50/50 water mixture and wipe clean and allow surface to dry thoroughly.
- Application of liquid adhesive on new or existing drywall substrate, painted and decayed masonry and concrete surfaces, refer to Chapter 6, Section Existing/New Drywall Application and Masonry Wall/ Poured Concrete itmes 6 -15 inclusively.
- For new masonry, brick and concrete walls, brush surfaces to remove any loose particles and remove all dust by vacuum, wipe down with a damp cloth to remove all dust.
- Clean thoroughly the back side of the Arcoplast panel. Dust and glass-fiber/resin particles need to be fully remove to enable good wet out of the 3M tape primer and a clean surface for the tape and liquid adhesive.
- Apply the liquid adhesive in a continuous 3/8" (9.5mm) diameter bead form. This will ensure that when panel is pressed against the double face tape the liquid adhesive will be spread out on the substrate ensuring the same thickness as the 3M VHB tape and resulting in a good adhesive wet-out. The liquid adhesive bead flattened by the panel pressure should yield a 3/4" width of flattened bead full surface contact.

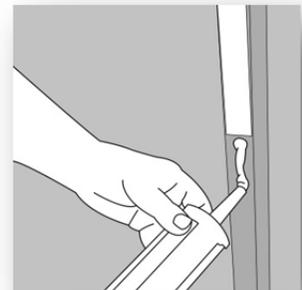

Arcoplast Modular Panel Installation Manual 2015

6. Apply the liquid adhesive just prior to the panel installation. This will prevent the liquid adhesive from skin drying. This application method will result in a good wet out contact and deliver maximum bond strength to the back side of the Arcoplast panel.
7. Some applications in specific industries will require the cavity behind the panel to be filled. In these instances apply a full bed of mastic adhesive and trowel with a ¼" (6mm) U notched tool throughout the full panel similar to ceramic tile installations. Note: The spacing and application of the metal furring strip and 3M VHB tape remains the same.

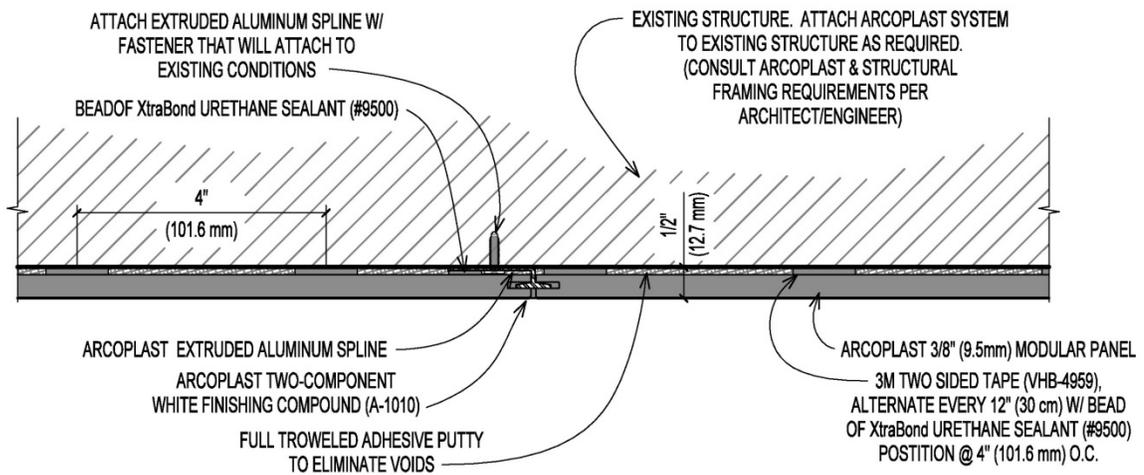

Chapter Ten : Panel Preparation -

Designate and secure an area for the panel preparation. The area must be secured with environmental safeguards and most importantly the safety and well being of co-workers, and employee residents.

1. Arcoplast modular gel coat composite panels have a mirror like finish surface. Ensure the panels are not scratch or damaged by contaminated work bench, tool belts, cutting equipment, rub marks from handling carts, lifting equipment, etc.,
2. Designate a secure area for the inspection, preparation and cutting of the Arcoplast panel. If it is not possible to secure a designated area, a temporary work area can be constructed




Arcoplast Modular Panel Installation Manual 2015

with clear plastic film attached to metal or aluminum stud framing. A prefabricated gazebo party tent is ideal in for these applications. These make shift environments can provide adequate protection and reduce the risk of contamination.

3. Seal properly the enclosure of the preparation and cut area. This will prevent dust escaping and possibly contaminating or compromising the construction site.




4. Ensure proper services such as, air, ventilation, lighting, electrical outlets and dust collection systems are adequate and available.
5. In preparation for the cutting of Arcoplast composite panels, build a dust box with 2"x4" (50 x 100 mm) wood framing members on 24" (600mm) c/c with a 1/8" (3mm) solid backer such as particle board to the bottom of the wood members.
6. Dust box should be 4'-0" (1,200mm) wide x length to accommodate the average wall panel length.
7. When cutting larger panels, such as ceiling panels, ensure that the cut lines, cut-outs and drilling areas are over the framed area allowing the dust to be collected in the box and preventing the majority of the dust to be airborne.
8. The dust box collector should be installed on solid work benches capable of bearing the weight of the box and the Arcoplast modular panel.
9. A mobile vacuum system works best to capture the dust generated by the tooling cuts, routing, drilling and sanding.

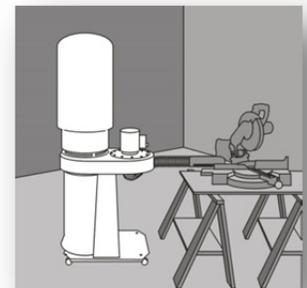

Arcoplast Modular Panel Installation Manual 2015

10. A mobile work station is also recommended for equipment and product storage.

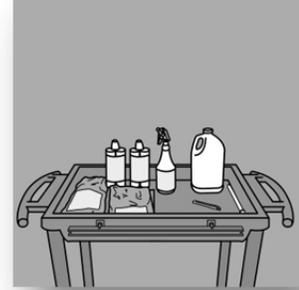

Note: Good housekeeping is essential for a cleaner and safer work environment.

Chapter Eleven : Room Preparation and Set Up -

1. The Arcoplast modular panels should be installed in the temperature range equal to that of the room's working temperature. Ensure the rooms outside openings and the building's roof is closed in and maintain the temperature range during the installation at 60°F-80°F (15°C-24°C).
2. Confirm with the project manager that all MEP and services are completed and ready for ceiling and wall panel installation.
3. Ensure door and window frames, access doors, lighting and diffusers have the proper depth and throat opening to accommodate the Arcoplast panel thickness.
4. Remove unnecessary materials and equipment from floor, wall and ceiling surfaces.
5. Install proper lighting and provide adequate power supply.



Arcoplast Modular Panel Installation Manual 2015

6. Ensure ceiling and wall framing members, furring channels and existing substrates are properly cleaned and ready to receive adhesive primer / promoter. Ref. Chapter 7 Surface preparation.
7. Mark proper location for the primer for 3M VHB tape and liquid adhesive application. A jig ruler will ensure consistent dimension and placement.
8. Prepare and make ready the primer, adhesive and mechanical fasteners for the panel installation.
9. Erect proper scaffolding and provide adequate handling and bracing equipment. Inspect they are safe and in good working order and at hands reach for the installation.

Chapter Twelve : Panel Installation -

Arcoplast gel coated glass-fiber reinforced composite panels are manufactured to exacting dimensions. However, it is advisable to order panels 1" (25mm) longer to compensate for any damaged end, accidental miss cuts, or irregularities in floor, wall and ceiling measurements.


Ceiling Panel Installation -

1. Install ceiling panels first –
 - a. Ceiling panels are usually cut to the full length of the room's width or length. The orientation of the ceiling panel is usually indicated on the reflected ceiling plan. Tight tolerances, handling and lifting of the panels in place could potentially friction and damage the already installed wall panels, it is therefore preferable to install the ceiling panels first.
 - b. By installing the ceiling panel first, the panel can be cut shorter by ¼" (6mm). This will facilitate the panel lifting, handling and positioning in place making the panel installation easier. Note when positioning the panel for installation allow 1/8" (3mm) space at each wall end extremities.




Arcoplast Modular Panel Installation Manual 2015

- c. Installing the ceiling panels first also allows the fastening of the panel with screws at the panel's perimeter. The mechanical fasteners should be installed at no more than ½" (12.5mm) from the substrate's edge such as steel stud or existing substrate.

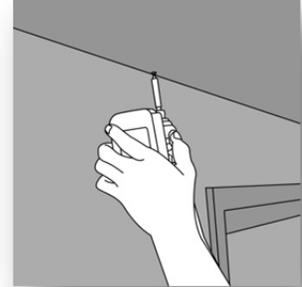

- d. Installing the ceiling panel first enables the application of third hand jacks to prop-up and keep positive pressure on the ceiling panel pending the curing of the liquid adhesive. However plan in advance to ensure the third hand jacks will not interfere with the moving in of panels and equipment as well as the installation of the next panels.

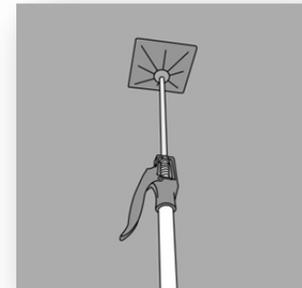


- e. Installing ceiling panels first will also facilitate the MEP trades with their respective installation.



Arcoplast Modular Panel Installation Manual 2015

- f. Installing the ceiling panels first enables the wall panels to be installed with a 1/8" (3mm) gap at the top of the wall liner. The designed horizontal gap at the top of the wall panel creates a ledge for the finishing compound to sit on, thus greatly reducing sagging at the application. And finally, the wall panel installed with the 3M # 4959 VHB adhesive tape and the aluminum spline totaling 1/2" (12.5mm) thickness projects the Arcoplast liner panel far enough to cover the screw heads that were installed at the perimeter on the ceiling panel and consequently not interfere with the application and tooling of the finishing compound.

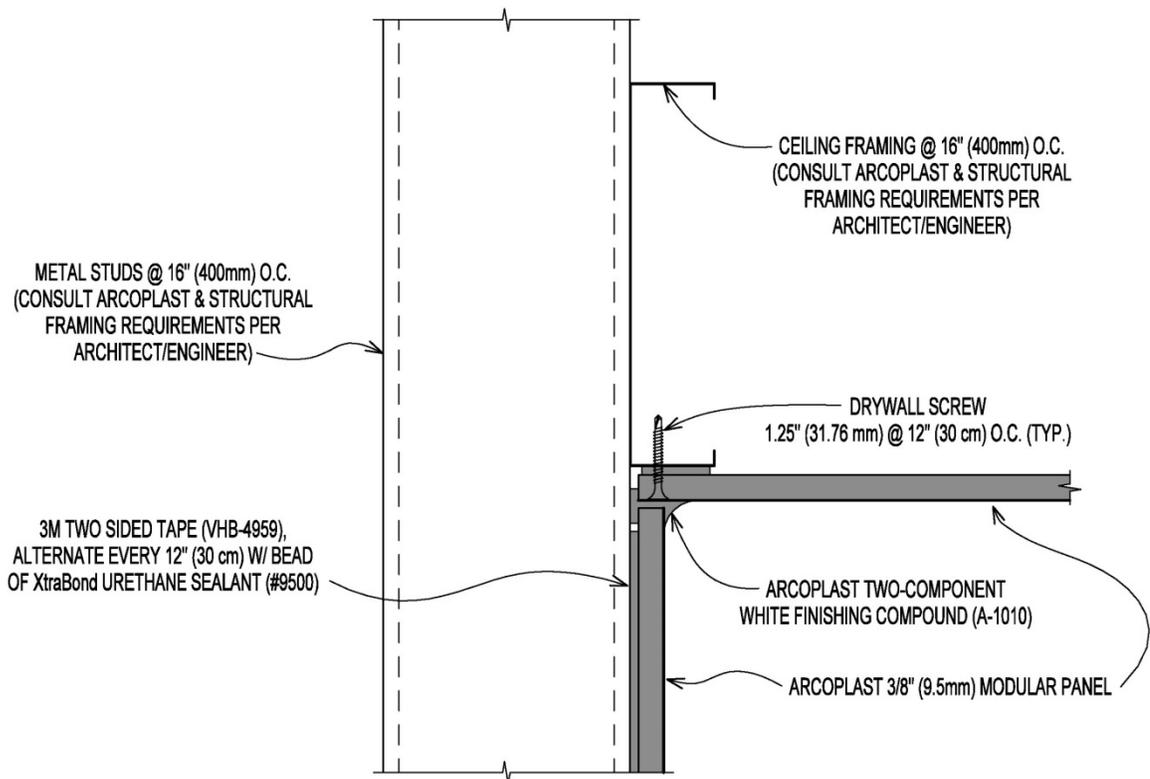

2. Define the location for the first ceiling panel to be installed, it is preferable to start at one end of a room because:
 - a. The ceiling panel system is a progressive system and will require planning for the sequence of the panel installation.




Arcoplast Modular Panel Installation Manual 2015

- b. The third hand jacks supporting the ceiling panel for a minimum of 8 hours could limit your access to the room and make it very difficult to maneuver scaffolds, equipment and the installation of the next panel.
 - c. Planning the progressive ceiling panel installation will be dictated by the access and exit paths to the room. Planning the sequence of the ceiling panel installation will also facilitate relocation of the services such as temporary lights, lifting equipment and scaffolds.
 - d. Deciding on the start location and panel sequence of the ceiling installation should be done in concert with the MEP trades.
 - e. In large areas or in long hallways, it is possible to start the ceiling panel installation in the center of the room and proceed with the panel installation in either directions simultaneously.
3. Take the panel final cut dimensions and the cut-out dimension for the MEP services.
 4. Keep the protective plastic film on the Arcoplast modular panel during handling, marking, cutting, drilling and installation of the panel.
 5. Lay the modular panel flat on the work bench with the gel coat surface and plastic film protector facing up. This will enable the inspection of the panel surface and panel edges.
 6. Verify the panel for trueness and ensure the gel coat surface and molded edges are clean and the panel groove is kerf properly. Peel back the plastic film protector a few inches to facilitate the inspection of the edges and gel coat finish.




Arcoplast Modular Panel Installation Manual 2015

7. Verify that the panel groove is kerfed properly and there is no foreign matter in the groove that could potentially prevent the spline from seating properly in the kerf. This is best achieved by gliding a short section of the aluminum spline along the panel's groove.

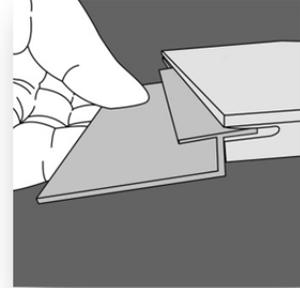

8. In the event a panel edge has been damaged in the transportation or handling or inadvertently miss cut, the panel may be relocated, cut and utilized at door or window locations, or used at another intersections of the room requiring a narrower panel. If the panel cannot be utilized at another location or room, a gel coat repair may be required. See gel coat repair procedure Chapter 15.
9. After inspecting the face side of the Arcoplast modular composite panel, turn the modular panel gel coat/plastic film protector face down on the cutting dust box. Transfer the marking for the dimensional cuts and MEP cut outs. Note: It is preferable not to mark the panel for the primer/promoter location at this time, the markings could be misread as a cut line.

10. With a felt marker pen, mark the field dimension cut lines and MEP cut outs. Also mark the panel for any door and window openings and equipment such as autoclaves and pass-thru's.

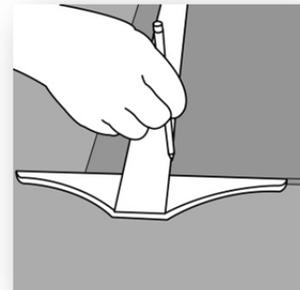


11. When taking field measurements, allow 1/8" (3mm) gap at the wall to ceiling junction, 1/8" (3mm) gap at the wall to floor junction, 1/8" (3mm) gap at wall to wall junction and 1/8" (3mm) gap around MEP penetrations. This will ensure adequate spacing for the insertion and application of the finishing compound.



Arcoplast Modular Panel Installation Manual 2015


12. Proceed to mark the panel edges and panel ends that will require routing for a starter strip such as existing baseboards or panels abutting to different finishes. Also in large areas some panels will have to be abutted end to end, the butting ends of these panels will require a routed groove to receive the aluminum spline that will join the two panels together.

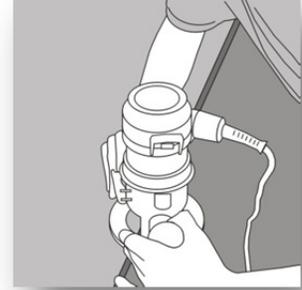

13. In this critical step, it is recommended to have a third party check the measurements and location for the proposed cuts prior to the final cutting action.

Note: Gel coated glass-fiber reinforced polymer panels are best cut, routed and drilled with diamond tools 80/100 grit see list of tools and equipment. A sharp carbide tooth blade will also yield clean cuts, however it will need sharpening frequently. Chapter 17.


14. Always wear Personal Protective Equipment (PPE) when cutting, routing, drilling and sanding Arcoplast modular glass-fiber reinforced composite panels.
15. Do not apply excessive pressure on the tools or use high speed when cutting, routing, drilling or sanding Arcoplast composite panels.
16. When cutting at intersecting lines, do not overcut but rather complete the cuts with a diamond jig saw.
17. When cutting out openings in the field of a panel, bore a hole at each corner of the proposed opening with a drill and diamond bit 3/8" (9.5mm). This will prevent cracking and chipping of the gel coat at the cut intersections.

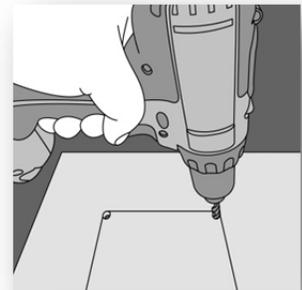


Arcoplast Modular Panel Installation Manual 2015

18. Projects with multiple protrusions that cannot be relocated, conditions often related to renovations, consult Chapter 15 on Penetrations & Protrusions for various methods of application.
19. Verify the Arcoplast modular panel is well positioned over the dust box. This will ensure that the dust generated by the cutting action will be captured and contained in the dust box.

20. Whilst cutting, routing, drilling and sanding the Arcoplast modular panels utilize tools with a vacuum hose to capture all dust generated on the surface of the panel. (If the tool is not equipped with a dust collector, have an assistant with a dust hose such as a Shop Vac assist and follow the cutting tool to capture the majority of the airborne dust. Dust and particles generated by the cutting action underneath the panel will be captured in the dust box. The dust generated by this action can then be vacuumed clean immediately after the panel is removed for installation.

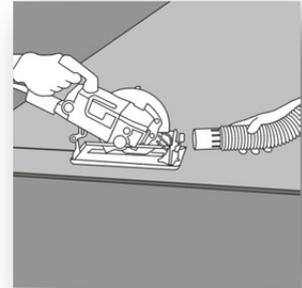

21. Cut, drill and sand the Arcoplast panels in a secure area where the dust collection can be effective. Minimize the spread of contaminants by sealing the area properly and by keeping negative pressure in the room. Ref. Chapter 9.

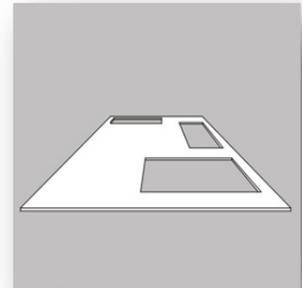

22. If a panel cut is not quite accurate or the panel fit is too tight, you can easily shave-off some of the dimension with a diamond saw blade or with a 3" x 20" (75mm x 500mm) portable belt sander with a # 50 grit paper.




Arcoplast Modular Panel Installation Manual 2015

23. Clean thoroughly the back side of the panel with IPA 50/50 and water solution and allow the panel to dry thoroughly. Do not overlook cleaning the panel edges thoroughly as the bond strength is contingent on a dust and contaminant free surface. This is easily accomplished with a moist rag over the tip of a flat screwdriver inserted in the panel groove and moved along the full length of the kerf.



24. On the back side of the panel, mark the vertical location on 16" (400mm) c/c that will correspond to the steel stud, furring channel layout. Also mark the bottom and top end of the panel corresponding to the floor and ceiling track for 3M primer/promoter that will be required for the 3M-#4959 double face adhesive tape. This location needs to correspond to the same location on the substrate, steel stud or furring channel. This is best achieved by creating a template "jig" ruler. It is recommended to have two identical "jig" rulers, one for the cutting room and one for the room being fitted out.

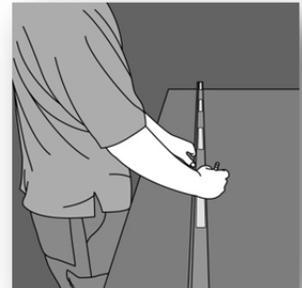

25. On the back of the Arcoplast composite panel apply the 3M primer/ promoter #94 with a 1" (25mm) paint brush. This brushed on 3M #94 primer area should correspond to the same area on the substrate, steel stud, furring strip, etc., at every 12" (300mm) c/c.



26. As the Arcoplast panel is being prepped for installation, proceed to have the substrates, steel studs, metal furring strips, etc., thoroughly cleaned with IPA 50/50 water solution and allow the surfaces to dry thoroughly.




Arcoplast Modular Panel Installation Manual 2015

27. On the substrate, steel stud or furring channel mark the vertical and horizontal locations for the 3M #94 primer. The areas should match identically with the projected location on the back side of the panel. Alternate every 12" (300mm) the 3M # 4959 VHB tape and liquid adhesive. This is accomplished by using a matching template "jig" such as a full length ruler/molding that is used to mark the back side of the Arcoplast modular panel.



28. Mark on both wall and ceiling substrate, steel track, furring channels the panel joint centers on 4'-0" (1.2m) c/c for wall and ceiling panels. This will ensure the wall and ceiling panel joint lines will match up and provide consistent dimension and reduce measurement creep occasionally seen in long runs such as large rooms and long hallways.

29. Wherever possible match wall and ceiling joint lines for a clean aesthetic look.

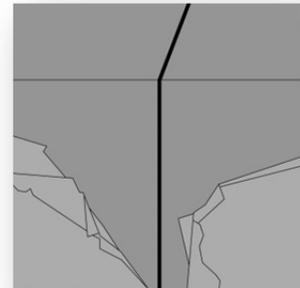


30. On the substrate, steel stud and track or furring channels, apply the 3M primer/ promoter #94 with a 1" (25mm) paint brush. This brushed on 3M #94 primer area should correspond to the same area on the back of the Arcoplast panel at every 12" (300mm) c/c.



Arcoplast Modular Panel Installation Manual 2015


31. Apply the 3M VHB #4959 double face tape in 1" x 12" (25mm x 300mm) strips on the framing members and perimeter track. Leave the protective film on the face of the double face tape at this time. See Chapter 8 - 3M VHB double face tape application.

32. With a two hand roller apply adequate pressure to ensure the tape has good contact to the substrate, steel studs or furring channels.

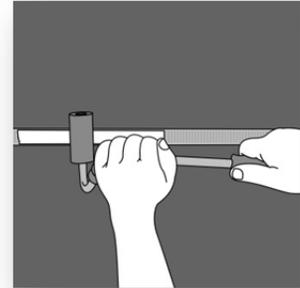


33. Place the panel gel coat face down on the drywall lift. Proceed to lift and dry fit the ceiling panel in place making sure the location and cut outs for the lights, MEP openings, access doors, alarms and monitoring systems match precisely the openings prior to the final adhesive application.

34. Measure the aluminum spline from the steel track edge to steel track edge. On the ceiling application, do not extend the aluminum spline from wall to wall and on the wall application, do not extend the aluminum spline from floor to under ceiling panel because the spline would overlap the thin flat head screws that attaches mechanically the steel stud to the track. This would result in an uneven layout of the spline making the panel groove and aluminum spline insertion difficult.

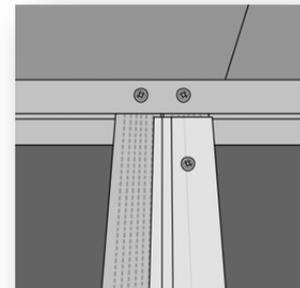


Arcoplast Modular Panel Installation Manual 2015

35. With a fine tooth metal blade cut to desired length the aluminum spline. A fine tooth metal jig saw blade will also cut the aluminum spline properly. Remove oils and contaminants on the aluminum spline with IPA and 50/50 water solution. Allow to dry thoroughly.

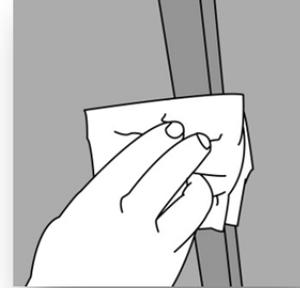

36. Apply the liquid adhesive only when the panel preparation is complete and the panel is ready for immediate installation. Do not allow the adhesive bead to skin over as this will inhibit a perfect wet out and diminish the bond strength.

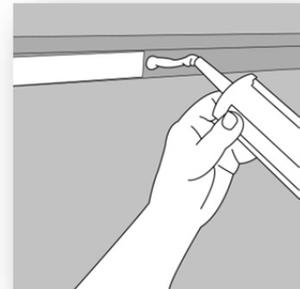

37. Dispense the liquid adhesive with manual or pneumatic dispenser. Ensure the bead is a continuous minimum 3/8" (9mm) diameter. As the panel is being pressed in place, the 3/8" (9.5mm) bead of liquid adhesive will be compressed to meet the 1/8" (3mm) tape thickness ensuring that the bead will be 100% in contact with both surfaces and spread out to 3/4" (75mm) wide adhesive strip.


38. Always ensure good wet out and proper bonding to the substrates. Review working time for the liquid adhesive and sealants as these products are influenced by temperature, relative humidity and application time.

39. Remove the protective film on the 3M VHP tape.




Arcoplast Modular Panel Installation Manual 2015


40. For the first ceiling panel installation at the end a room, move the lifting apparatus (drywall lift) in place, load and lift the panel carefully in position.

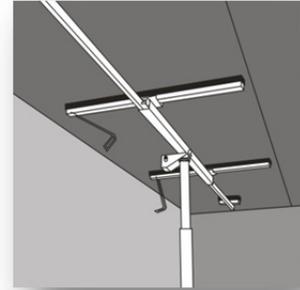

41. Position the ceiling panel in place and apply pressure to make contact with the adhesive tape and liquid adhesive. Fasten the perimeter of the panel immediately with self-drilling drywall screws on 16" (400mm) c/c. There is no need to countersink the panel. However the screw head must not exceed ½" (12.5mm) distance from the perimeter substrate or steel stud track, furring channel, etc. The exposed fastening screw (not countersunk) provides the proper spacing 1/8" (3mm) between the ceiling and wall panel creating the right gap (ledge) for the application of the finishing compound.

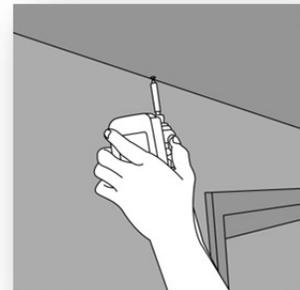


42. Prior to inserting the aluminum spline, dispense a fine continuous bead of Arcoplast A-1010 of finishing compound in the panel kerf. This is best achieved with a manual gun dispenser and a small static mixer nozzle coupled with a flexible/compressive plastic straw that can be inserted in the panel groove. Do not overfill. Ref. Chapter 14 Part 6. Customizing a static dispenser nozzle.

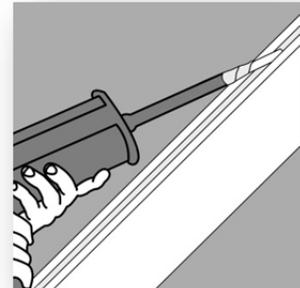

Arcoplast Modular Panel Installation Manual 2015


43. Position the aluminum spline between the two ceiling tracks, this prevents the aluminum spline from overlapping the flat screw heads that attach the steel stud to the steel track. Insert the small dog leg in the kerf of the panel. Ensure the spline molding is well seated against panel and substrate/framing member. Fastened with # 8 x .0625 ultra-thin self-drilling wafer head screw, ensure that the screw heads are flat against the spline attachment. It is important that the screw head be set in depth and flat against the aluminum spline or starter strip. The fastening screws provide the exact height for the next panel to glide into the second portion of the dog leg. Note: Multiple cut pieces of spline can be installed in a panel groove, however, do not leave gaps in between the splines. Any voids in between the spline moldings will create blistering in the finishing compound application and can only be detected once the finishing compound is in the curing process.
44. Immediately apply temporary “third hand” jacks and make sure the panel is well propped against the adhesive and the 3M VHB tape. The third hand jacks should be positioned in the center of the panel spaced on 4’-0” (1.2m) c/c. Allow minimum of 8 hours of propping time before removing the third hand jacks. Note: When installing the temporary third hand jacks do not apply excessive force as you could bend or twist the framing members and force the panels out of plane.
45. Wherever required, immediately apply the mini bar clamps (Irwin Quick Grip) to all the MEP/HVAC opening cut outs. Position in line with the 3M VHB tape. This will prevent distortion in the panel if excessive force is applied. As in the third hand jacks, allow 8 hours of prop time to ensure proper bond.

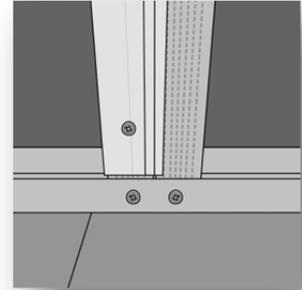


Arcoplast Modular Panel Installation Manual 2015

46. Immediately fasten the panel's perimeter edges abutting to walls with self-drilling drywall screws 16" (400mm) c/c. There is no need to countersink the panel for the screws. The screws heads sticking out conveniently provide the required spacing 1/8" (3mm) for the seating of the Arcoplast finishing compound.
47. When the ceiling panel is secured in place, lower, remove and relocate the drywall lift for the next panel installation.
48. Whenever possible, inspect the back side of the panel to ensure the panel has full contact with adhesive and that there are no obstruction prohibiting the panel bond to the substrate.

49. Immediately remove the excess finishing compound from the joint line. The excess finishing compound not removed will later interfere with the application and tooling of the Arcoplast finishing compound. With the Thermaclean cleaner wipe the surfaces thoroughly. Clean the area in three individual cleaning passes using a new wipe each time, this will prevent diluted finishing compound smear marks.

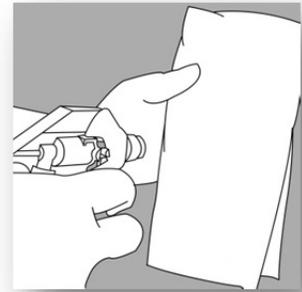


50. The ceiling panel installation can be described as a progressive system. It is possible to start the first panel installation in the center of the room and then continue with the panel installation in both directions, especially in long rooms such as hallways. However, this could prove challenging in confined areas or narrow hallways because the temporary "third hand" jacks could limit access to the work area.

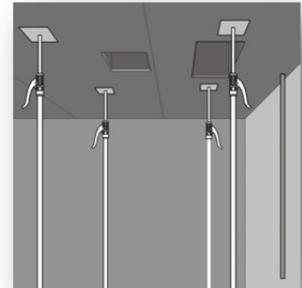


Arcoplast Modular Panel Installation Manual 2015

51. Continue with the ceiling panel installation. With the use of the lifting apparatus carefully position the ceiling panel in place. Do not make contact with the 3M VHB tape and liquid adhesive at this time. Position the panel at a slight angle with the edge of the Arcoplast modular panel directly over the screw heads attaching the aluminum spline to the substrate, this will allow to glide the panel directly into the small dog leg portion of the aluminum spline.

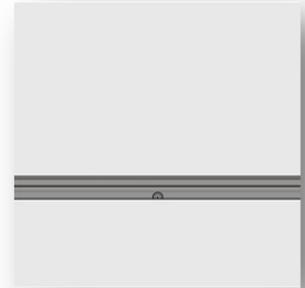

52. To position the panel in place, the use of vacuum cups is required.

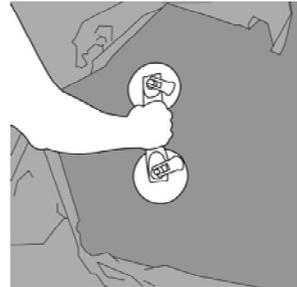


53. Start inserting the panel in the small dog leg portion of the spline at one end of the panel and progressively glide the panel working your way to the other end of the panel. Push the panel in place with the spline fully inserted in the panel groove. With the lifting apparatus, lift the panel firmly against the 3M VHB tape and liquid adhesive. Hold in place until the third hand jacks are propped in place. Press the panel in place with the two hand roller firmly roll after making sure the panel joint spacing is in line and consistent throughout the joint.



Arcoplast Modular Panel Installation Manual 2015

54. Where possible, examine the back side of the Arcoplast panel to ensure it has full contact with the adhesive. Install the “third hand” jacks and mini bar clamps wherever required. With the two hand roller, apply constant pressure with the roller throughout the panel to ensure contact with the 3M VHB tape and liquid adhesive. Fasten the panel perimeter abutting to the walls with self-drilling screws on 16” (400mm) c/c. At MEP openings and through ceiling embeds and wherever flanged units are installed it is recommended to seal and fasten mechanically the panel flange portion providing the openings will be finished with a finish trim in order to conceal the fasteners . This finish trim will later be sealed with the Arcoplast finishing compound for air, moisture and gas tight installation.
55. Proceed and complete the ceiling panel installation.

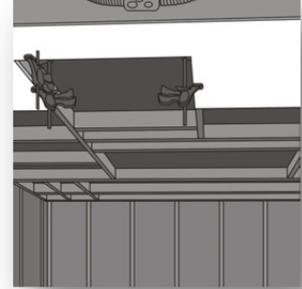

Wall Liner Panel Installation –

1. The Arcoplast wall liner panel installation can also be described as a progressive system. However, it is possible to start the panel installation in the center of a room and advance with the panel installation in both directions. Door openings, window frames and the locations of equipment will likely dictate your start position.



2. Before starting the installation of the Arcoplast wall liner panel, verify that the framing sections and surface preparation correspond with the wall to floor base curb design and architectural drawings. Ref. Chapter 12 - Wall to Floor Curb Details.




Arcoplast Modular Panel Installation Manual 2015

- Proceed to mark on the substrate, steel stud, floor, ceiling track and furring channel the location for the 3M #94 primer. The marked location for the 3M #94 primer should correspond with the location on the back of the panel at every 12" (300mm). This is best accomplished by using a matching template "jig" such as a full length ruler/molding that is used to mark the back side of the Arcoplast modular panel.



- As referenced in Article 29 on page 44 at the start of the ceiling panel installation, the center for the ceiling and wall panel joints were marked on the substrate, steel track or furring channels on 4'-0" (1.2m) c/c. Following these marks for the wall panel installation will ensure that the panel joint lines will match up with the ceiling panels.

- Wherever possible match wall and ceiling joint lines for a clean aesthetic look.

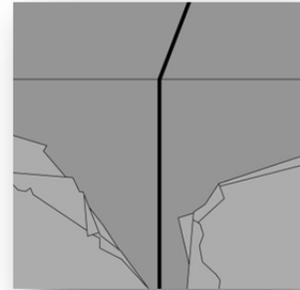


- On the substrate, steel stud and track or furring channels, apply the 3M #94 primer with a 1" (25mm) paint brush. This brushed on 3M #94 primer area should correspond to the same area on the back of the Arcoplast panel at every 12" (300mm) c/c.



Arcoplast Modular Panel Installation Manual 2015


7. Apply the 3M # 4959 VHB tape 1" x 12" (25mm x 300mm) strips vertically and horizontally at the top and bottom of the existing substrate, metal framing, or furring channel. Do not remove the protective film on the double face tape at this time.

8. With a two hand roller apply pressure throughout the rolling motion to ensure the tape makes good contact to the substrates.

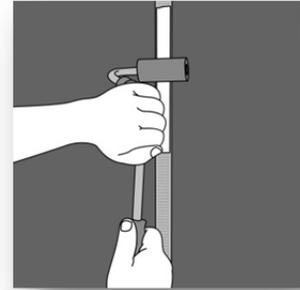

9. Prior to the application of the liquid adhesive, dry fit the cut panel to ensure a perfect fit with the multiple penetrations. Make sure the MEP accessories, door and window openings are installed at the proper depth to receive the liner panel. Note: The overall thickness of the Arcoplast wall and ceiling liner panel systems for the 3/8" (9.5mm) panel is 1/2" (12.5mm), that is the distance from the face of the substrate, steel stud or furring channel to the face finish of the Arcoplast panel.

10. Apply the liquid adhesive only when the panel preparation is complete and ready for installation. Note: Do not allow adhesive beads to skin over as this will inhibit a perfect wet out and diminish bond strength.

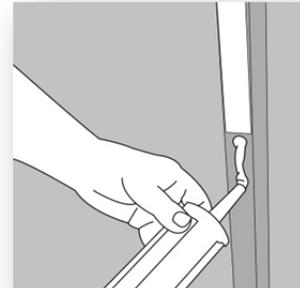


11. Dispense the liquid adhesive on the substrate, steel stud and furring channels alternated with the 3M VHB tape in a continuous 3/8" (9mm) diameter bead.




Arcoplast Modular Panel Installation Manual 2015

12. For maximum bond strength review the working, set up and cure time for the liquid adhesive. Do not allow the adhesive bead to skin over as this will greatly reduce the wet out and significantly diminish the bond strength.

13. The aluminum spline should be fitted from the steel track edge to steel track edge. Do not extend the aluminum spline from floor to ceiling because the spline will overlap the thin flat head screw that attaches the steel stud to the track. This would result in an uneven layout of the spline making the panel groove and aluminum spline insertion difficult if not impossible.

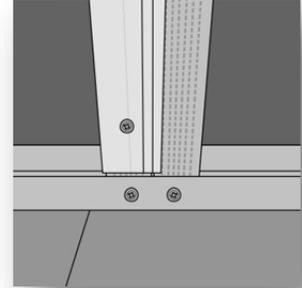

14. Cut to desired length the aluminum spline with a fine tooth blade for metals. A jig saw with a fine tooth metal jig saw blade will also cut the aluminum spline properly. With a clean cloth, wash thoroughly with IPA and 50/50 water solution and allow to dry thoroughly.

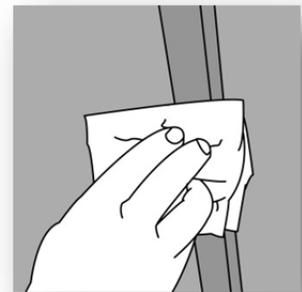


15. Depending on the substrate you will be fastening to and the type of screw you will be fastening with, you may be required to pre-drill the aluminum spline. If so required, pre-drill appropriate hole size with metal drill bit to accommodate the screw size.

16. When all the preparation steps have been completed, remove the protective film on the VHP tape and position the panel in place.




Arcoplast Modular Panel Installation Manual 2015

17. Position and align the wall panel with the marked center line or the ceiling panel already installed. Level, plumb and press the panel in place. With a two hand roller apply pressure on the face of the panel along the areas that have adhesive strips 16" (400mm) c/c. In the case of the first panel installed at an interior/exterior corner junction, position and align with ceiling panel marks, level, and plumb and press the panel in place. Fasten the cut edge of the panel with drywall self-drilling screws. It is not necessary to countersink the panel for the fastening screws because the adjacent panel to be installed has an overall total thickness of ½" (12.5mm) which will cover the fastening screw. The exposed fastening screw head allows the adjacent panel to leave a space 1/8" (3mm) gap required for the application of the finishing compound.

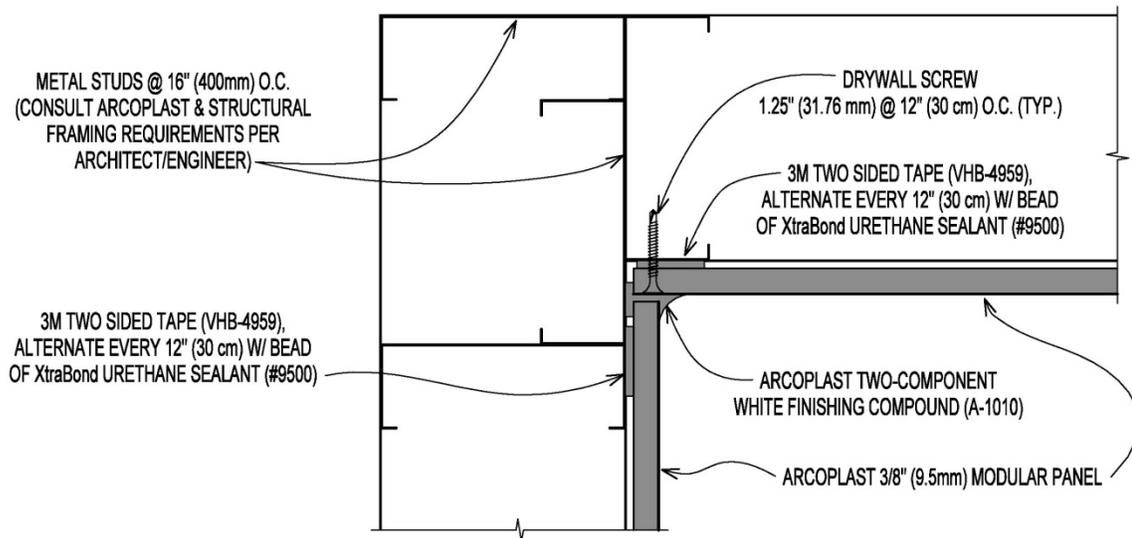


Arcoplast Modular Panel Installation Manual 2015

18. Insert plastic shims at wall intersections and floor to ensure a 1/8" (3mm) continuous gap. This will allow sufficient space for the finishing compound to fill the gap creating a better seal, panel bonding and stronger joint assembly.

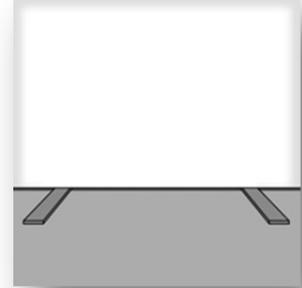


19. With the panel positioned in place, proceed to dispense a fine bead of Arcoplast A-1010 finishing compound in the panel kerf. This is best achieved with a manual gun dispenser and a customized static mixer nozzle to fit the panel groove. Reference Chapter 14 – Application and tooling of Arcoplast finishing compound – Article 34.

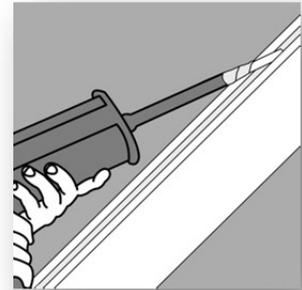

20. Insert the small dog leg portion of the aluminum spline in the kerf of the panel. Ensure the spline molding is well seated against the panel and the substrate or framing members. Fasten with ultra-thin wafer head self-drilling screws. Make certain the screw heads are flat against the spline attachment enabling the next panel to glide easily into the second portion of the dog leg. Remove immediately the excess finishing compound seeping out from the panel kerf. This procedure will allow the uninterrupted application of the finishing compound at the finishing stage.




21. Wherever the panel intersects with the adjoining wall, ceiling, floor and penetrations, allow 1/8" (3mm) gap. This will ensure a ledge and sufficient space for the finishing compound to seep- in. This results in a much stronger seal and panel bond. Shim at floor 1/8" (3mm).

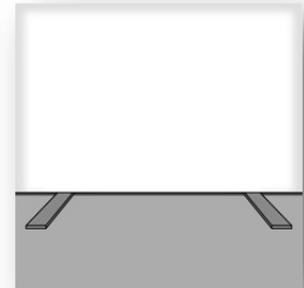


Arcoplast Modular Panel Installation Manual 2015

22. The last panel installed at a corner junction can be fastened with countersunk flat head screws. The panel can also be temporarily propped in place with a corner block (wedge) fastened with a 3" (75mm) drywall screw at a 45° angle. Shim at wall intersection 1/8" (3mm).

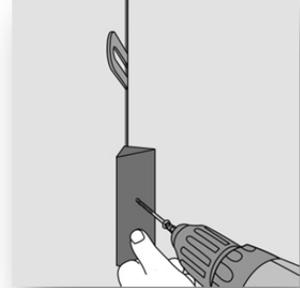

23. Removed the corner block (wedge) after the panel is fully secured with the adhesive, typically 8 hours cure time. The screw hole left in the panel joint will later be filled with the finishing compound as the cove is tooled in place.

24. Whenever installing a new wall section that is starting from a different substrate, such as stainless steel, ceramic tiles, masonry bloc or glass, a starter strip will be required. The aluminum starter strip molding retains the panel firmly in place without the need for exposed fasteners.

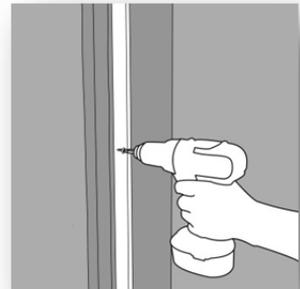


25. Measure from track to track and cut to length the aluminum starter strip. With # 8 x .0625 ultra-thin self-drilling wafer head screws fastened the starter strip to the steel stud or furring channel. Make sure the ultra-thin wafer head screws are flat against the aluminum spline. If the flat head screws are not well seated and flat against the aluminum spline, the next panel will not glide into place because of the tight tolerances in the panel groove. Note: Also make sure that the starter strip does not extends over the floor and ceiling track, this will eliminate bulging out of the




Arcoplast Modular Panel Installation Manual 2015

starter strip due to the additional thickness of the screw head making the installation of the panel almost impossible.

26. Carefully position the Arcoplast modular panel over the ultra-thin self-drilling screw heads. Guide the panel groove into the dog leg of the aluminum starter trim and with the help of the vacuum cups glide the panel in position. If starting with less than a full panel, the cut edge of the panel will require to be routed.

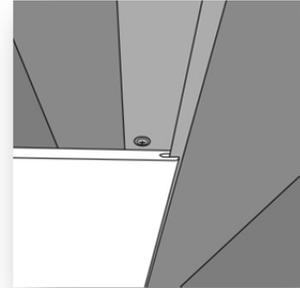


27. Around the door and window frames where the “throat opening” (the distance between the substrate, steel stud or, furring channel and the door frame return) will not allow the insertion of the modular panel, install a “J” starter strip molding. Butt the “J” starter strip to the sides, top and bottom of the frame. The “J” starter strip molding will secure the panel firmly in place without the need for exposed fasteners.


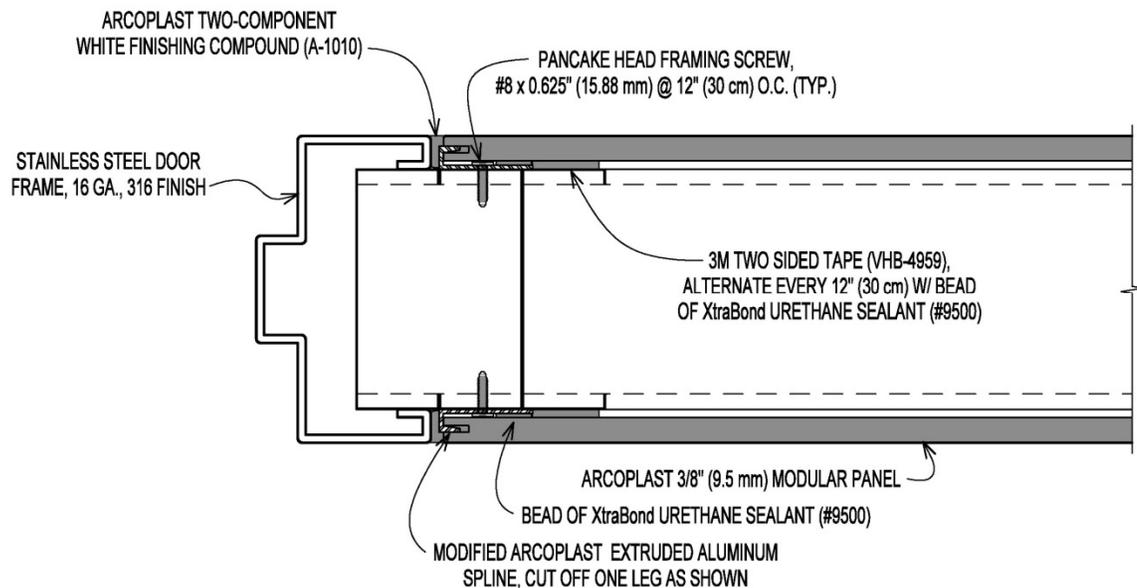


Arcoplast Modular Panel Installation Manual 2015

28. Install the “J” starter strip molding around the door and window frames. Fastened the “J” trim with ultra-thin wafer head self-drilling screws on 16” (400mm) c/c. Cut and groove the panel to required configuration and dimension. With a # 100 grit sand paper and bloc, sand and bevel lightly the edge of the panel cut edge. This will provide a smooth lightly beveled edge for the finishing compound detailing. Position in place and insert the panel in the small portion of the dog leg of the (J) starter trim.

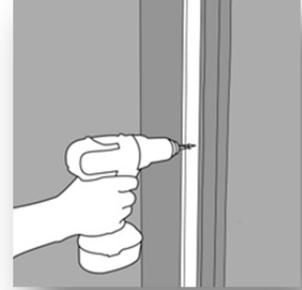


29. For door and window frames with sufficient throat opening, cut the panel to required dimension. Position and glide the panel behind the face of the frame carefully avoiding making contact with the 3M VHB adhesive tape. When properly positioned in place, press and apply pressure with a two hand roller. Secure the panel in place with the aluminum spline. Temporarily wedge the panel with plastic shims around the door and window frame opening until the adhesive sets, typically 8 hours.

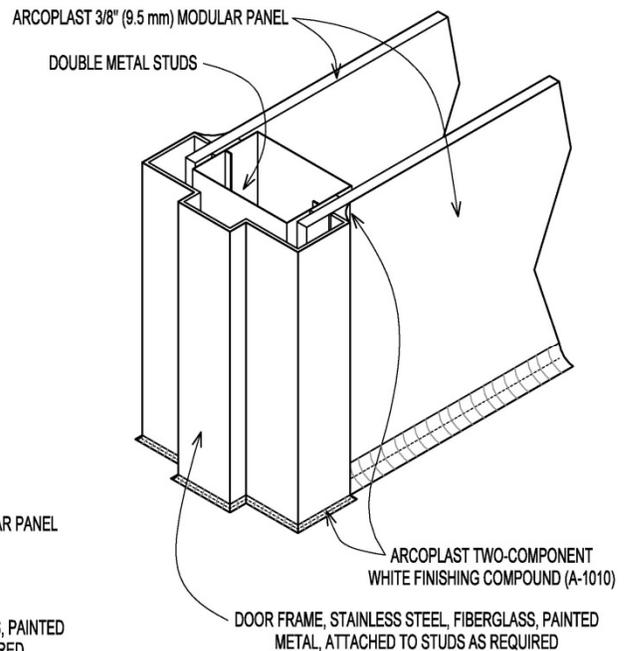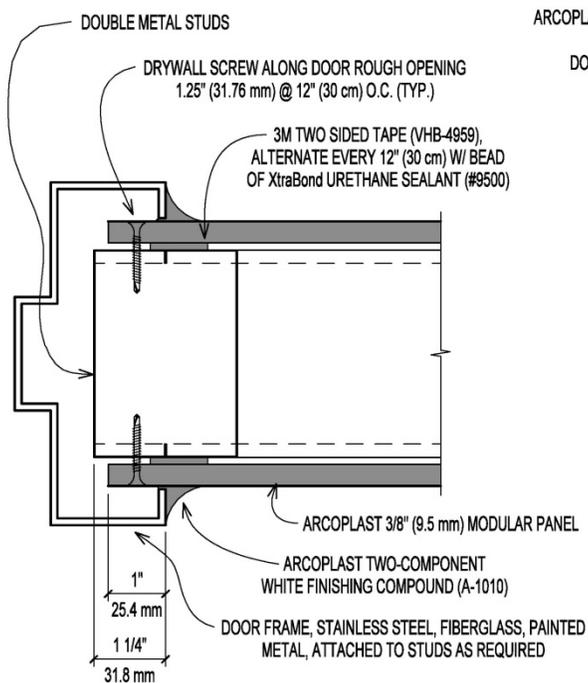


Arcoplast Modular Panel Installation Manual 2015

30. When installing a recessed transom panel above a door and window frame, cut the panel to required dimension. Groove both sides of the transom to receive the aluminum spline attachment. Make sure the panel edges are sanded and lightly beveled to receive the finishing compound.

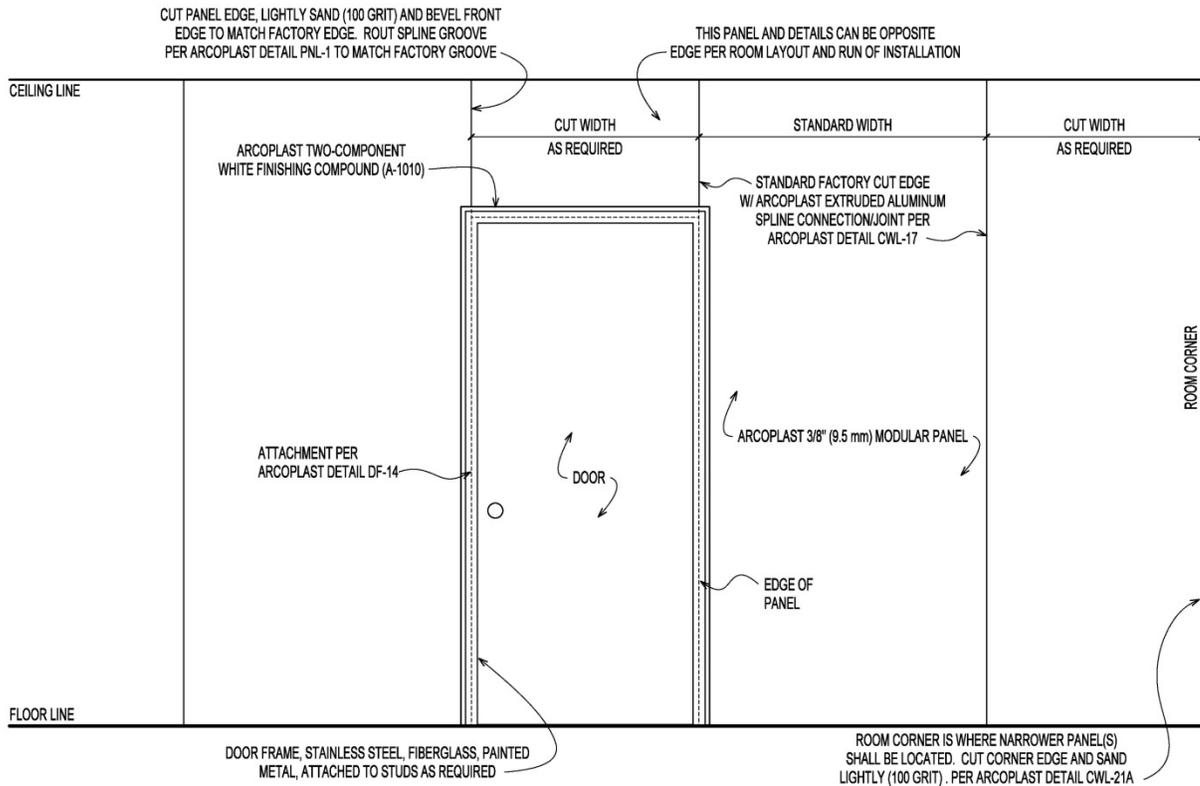

Arcoplast Modular Panel Installation Manual 2015

31. If installing a transom panel in line with the door and window frame opening, cut the transom panel to required dimension and groove both sides to receive the aluminum spline attachment. Make sure the panel edges are sanded and lightly beveled to receive the finishing compound. Make sure mechanical spline attachment above the door or window frame is in line with the J starter strip installed at the door and window frame.

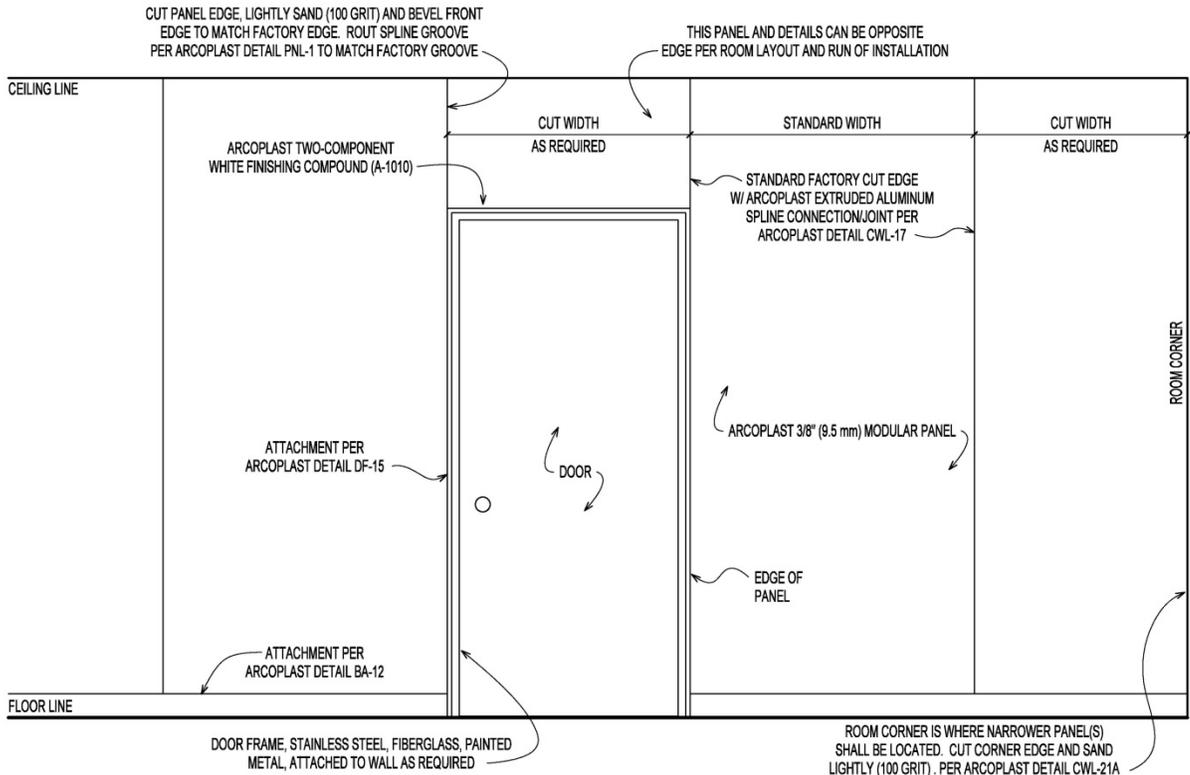


32. Proceed to remove wedges/ shims once the panel is well bonded. Typically 8 hours for fixture time.




Arcoplast Modular Panel Installation Manual 2015

33. When the panel is positioned in place, countersink and fasten the panel below the projected base “curb” height.

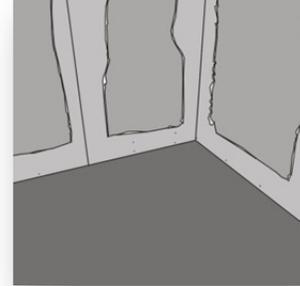

34. With a 1” (25mm) putty knife, fill the countersunk screw heads with the excess finishing compound generated by the tooling and detailing of the flat joints or cove sections. Pre-filling in the screw heads will prevent a print thru in the floor coving material.

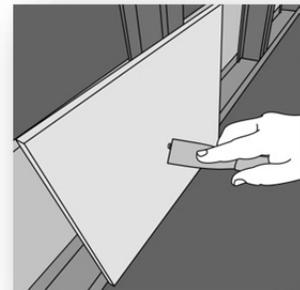

35. Once the panel installation is completed, peel back the plastic film around the perimeter of the panel for approximately 6” (150mm). This will provide sufficient work area for the application of the 3M low tack protective tape and for the detailing of the finishing compound. Ref. Chapter 13 Finishing Compound Application.



Installation over Gypsum Wallboard -


The Arcoplast modular panels can be successfully installed over new or existing gypsum wallboard. However, because of the poor bond strength to the wallboard, a metal furring strip fastened with screws over the gypsum wallboard is required.




Arcoplast Modular Panel Installation Manual 2015

1. Before the start of the installation of the Arcoplast modular panels, make sure that all the MEP, monitoring and alarm systems are in place. Ensure the services and device boxes are installed at the proper depth, plumb and square. Note: The overall thickness of the Arcoplast wall and ceiling liner panel systems for the 3/8" (9.5mm) panel is 1/2" (12.5mm). That is from the face of the gypsum board (drywall) to the gel coat face of the Arcoplast panel, equals 1/2" (12.5mm).

2. For new and existing wallboard construction, install a continuous 2 1/2" (63mm) x 16 gauge flat galvanized metal strip over the gypsum wallboard. The 2 1/2" continuous metal strips should be installed with adhesive and fastened mechanical with screws. Follow the same rhythm of the metal framing structure, typically spaced on 16" (400mm) c/c.

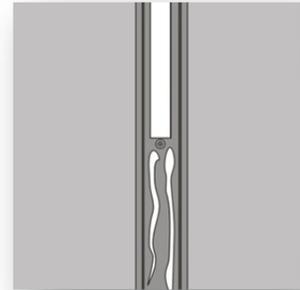

3. Pre-drill the flat metal furring strip 12" (300mm) c/c.
4. Clean thoroughly the 2 1/2" (63mm) galvanized metal strip on both sides with IPA and 50/50 water solution to remove oils and contaminants. Allow to dry thoroughly.
5. Apply two continuous 3/8" (9.5mm) beads of liquid adhesive on the back side of the metal strip.

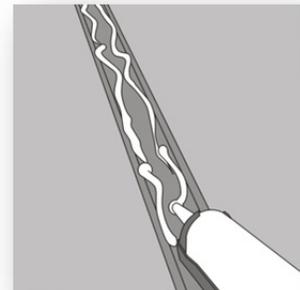

6. Position and fasten the metal strip over the existing metal framing members situated behind the gypsum wallboard/drywall. Fasten with flat head screws # 10 x 1 1/4" (31mm) long. Note: Depending on the framing substrate, a different mechanical fastener may be required.




Arcoplast Modular Panel Installation Manual 2015

7. After the metal strips are installed proceed to mark the locations for the application of the 3M # 94 primer. Use the same jig measuring tool used to mark the location of the 3M VHB tape on the panel.



8. Apply 3M VHB #4956F double face tape 1" (25mm) in lengths of 12" (300mm) to the metal strips. Leave the protective film on the double face tape at this time.

9. With a two hand roller apply pressure over the gel coated panel. With a rolling motion apply pressure throughout the panel to ensure the panel is making good contact with the adhesive.

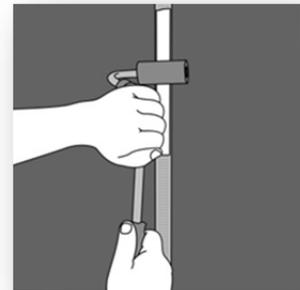


10. Complete the Arcoplast wall and ceiling panel installation as described in steps 60 through 91.




Chapter Thirteen : Glazing Sections –


1. On the extrusion edge, apply a thin coat of 3M tape primer # 94 and allow to dry. A ½" (12.5mm) paint brush is best suited for the application.

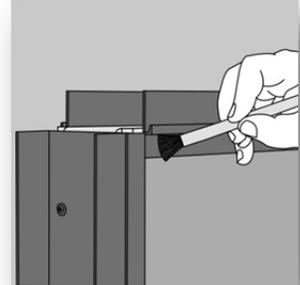

2. Glazing section: With a ½" (12.5mm) paint brush, carefully apply a thin coat of the primer 3M # 94 to the back side of the glazing section and allow to dry. Do not exceed the glazing printed perimeters.

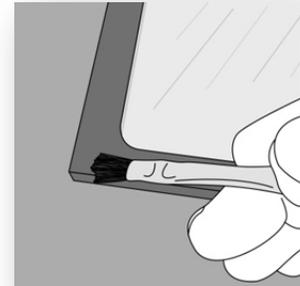

3. Apply the 3M VHB double face tape # 4979F x ½" (12.5mm) wide x 1/16" (1.6mm) in thickness along the aluminum extruded edge for a glazing thickness of 8 mm. Apply the 3M tape neatly following the edge of the window extrusion. Note: Various glazing thickness will require corresponding tape thickness. Note: Do not remove the protective tape film until final glazing preparation and installation is ready.

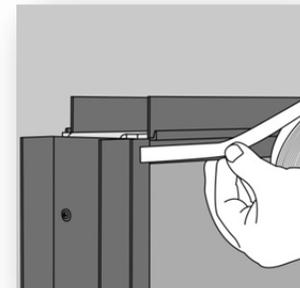


4. It is recommended to dry fit the plate glass prior to removing the protective film on the adhesive tape. Apply a 1/16" (1.6mm) shim plate on the extrusion edge, preferably on all four sections, sill, header, left and right jamb and position the plate glass to ensure a perfect fit.




Arcoplast Modular Panel Installation Manual 2015


5. Proceed to remove the protective film on the 3M adhesive tape and leave the shim plates in place. Reposition the plate glass in place and apply moderate pressure all around ensuring a good bond to the adhesive tape. Remove the shim plates only when ready to apply the finishing compound.

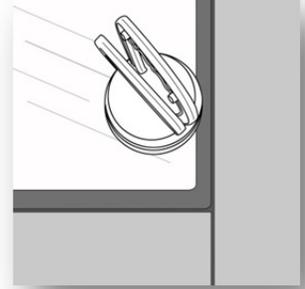

6. Proceed to apply the protective tape 3M #335 on both the panel edge and glass edge leaving a distance of $\frac{1}{4}$ " (6mm) to match the panel joint width.

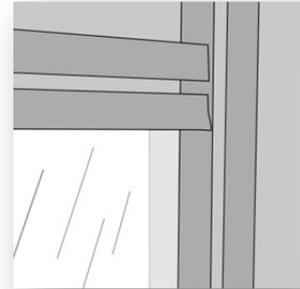

7. Clean thoroughly and apply the Arcoplast finishing compound ensuring the dispensing deep in the joint with the help of the "pink needle nozzle" # 20G-LA10.

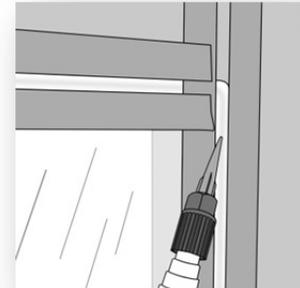


Arcoplast Modular Panel Installation Manual 2015

8. With a 3M squeegee, tool flush. Apply a second pass with the squeegee applying very little pressure to achieve a smooth, non obstructed continuous flat joint.



9. Remove the tape immediately, pulling away from the finish joint at 45 degrees. This will eliminate pulling the wet finishing compound and contaminating the clean finish.

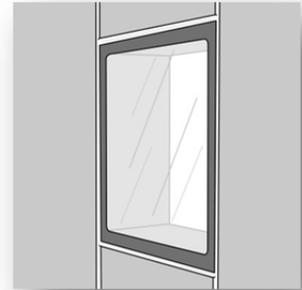

10. With a sharp putty knife remove any excess finishing compound and clean the surfaces thoroughly with Thermaclean.



Chapter Fourteen : Wall to Floor Curb Details -

New or retrofit projects, variables in floor materials and finishes, floor and building movement, sanitation/decontamination requirements all influence the type of coving details at the junction of wall to floor finishes.

The Arcoplast installation manual will describe the installation methods for the (3) three most common wall to floor curb base details -

1. Termination / transition strip application
2. Flush base application
3. Recessed coving application

Termination / Transition Strip Application -

The Arcoplast modular panel with a termination strip application should have already been included in the Architectural design and specifications. However, consult with the project manager for final approval on the type and height location of the termination strip.

The use of a termination strip is an excellent way to transition from the Arcoplast wall panels to the flooring cove base materials. It is recommended that the Arcoplast panel contractor prepare the wall surfaces and install the termination strip in readiness for the application of the flooring materials


Justification:

- a. Arcoplast wall panel contractor has the appropriate tools
- b. Arcoplast wall panel contractor has the specified product
- c. Arcoplast wall panel contractor has the knowledge and skills required for the preparation and application methods



Arcoplast Modular Panel Installation Manual 2015

The standard termination strip for the Arcoplast composite wall systems is 1/8" (3mm) x 5/8" (15.9mm) galvanized metal angle. The termination strip provides a sleek and continuous straight border line that allows the flooring product to be trowelled and finished with a consistent dimension and a clean look. The termination strip when applied with the 3M VHB # 4936 tape provides a thin ledge for the application of the finishing compound and also provides an excellent and durable housekeeping seal.

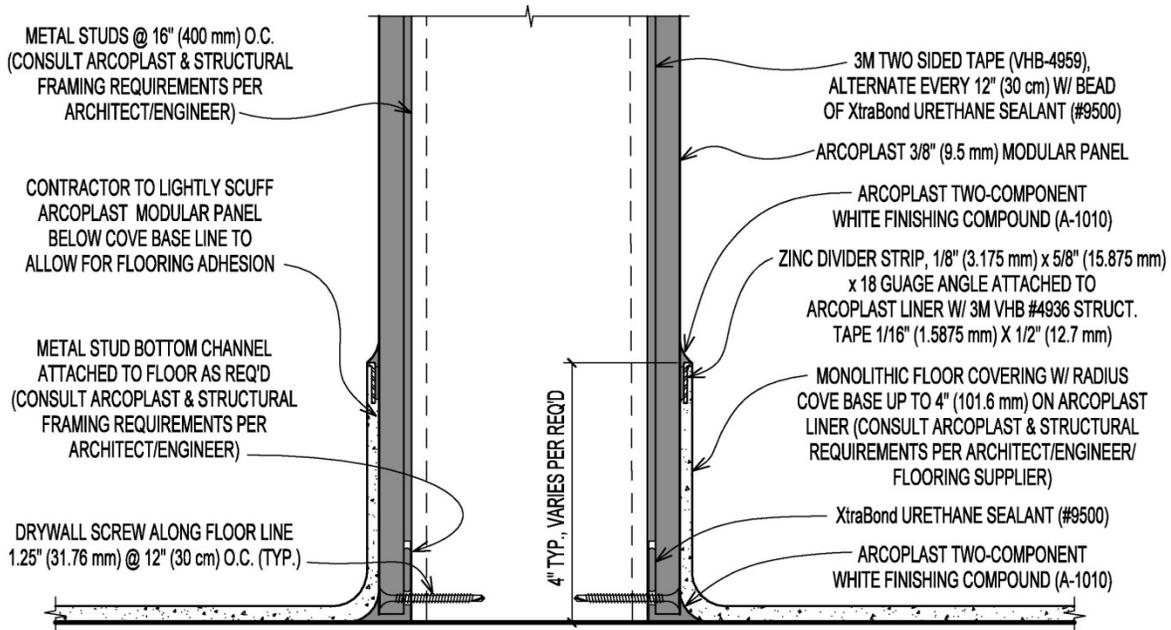


1. Start by peeling back and cutting off the excess of the plastic film protector 6" (150mm) above the proposed termination strip height.
2. Mark with the use of chalk line or laser system the desired termination strip height. Note: Mark the bottom of the termination strip position only.
3. With a powered 3" belt sander and # 80 grit sand paper proceed to lightly sand (dull) the gel coat surface below the proposed termination strip height. Do not remove the gel coat surface.



Arcoplast Modular Panel Installation Manual 2015


4. Do not sand the gel coat surface where the 3M # 4936 double face adhesive tape will make contact with the Arcoplast panel for the termination strip.

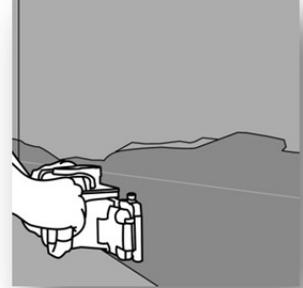


5. With IPA and 50/50 water solution wipe and remove the dust and contaminants from the sanded gel coat surface. With a vacuum cleaner, remove the dust and contaminants at the junction of the wall and floor surface.



6. At the predetermined height apply the 3M # 94 surface primer on the panel with a small paint brush.

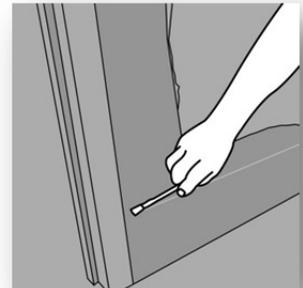


7. Spray the termination strip with IPA and 50/50 water solution on both face and back side.

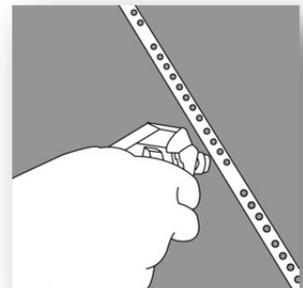


Arcoplast Modular Panel Installation Manual 2015


8. With clean wipes remove any oils and contaminants and allow to dry thoroughly.

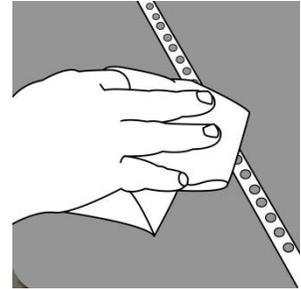


9. Apply 3M # 94 surface primer on the back side of the termination strip with a small paint brush and allow to dry thoroughly.

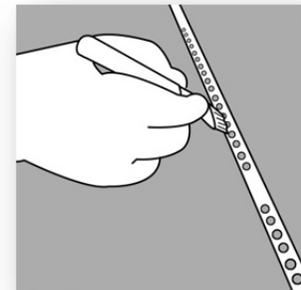

10. Apply the 3M VHB # 4936 - 1/16" x (1.5875 mm) thick x 1/2" (12.5mm) wide tape on the termination /transition strip. Do not remove the film protector at this time.

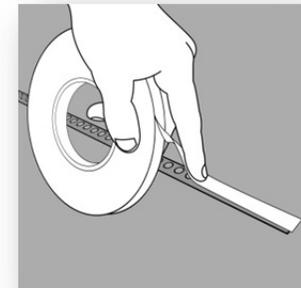


11. With a 2" (500mm) roller apply pressure throughout. Make sure the 3M VHB #4936 tape is well adhered to the termination strip.

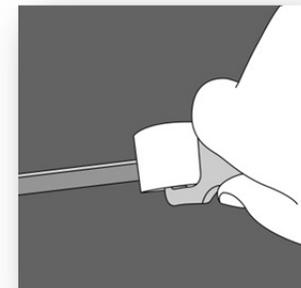


Arcoplast Modular Panel Installation Manual 2015


12. For the interior and exterior corner junctions, shape the termination strip to match the radius by lightly bending the molding over a wooden dowel.

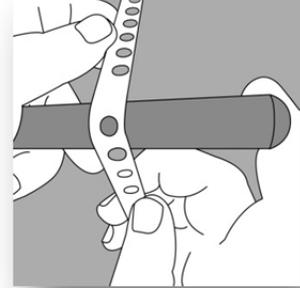

13. Once the shape is 90° degrees, lay the termination strip on a flat hard surface. With a hammer lightly tap on the top of the trim to flatten the edge of the termination strip that was stressed by the shaping of the radius.

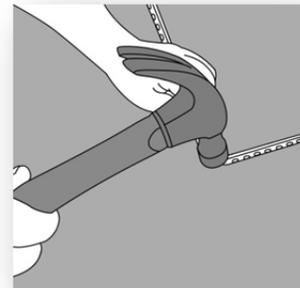

14. Start the installation of termination/transition strip at the inside and outside corners, and then complete the installation with the required lengths.

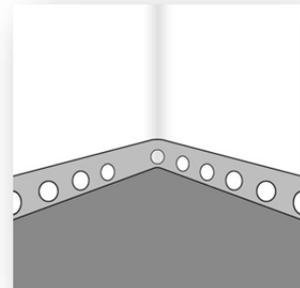


15. Remove the protective tape and install the termination strips at the predetermined finished height. Make sure the termination strip is in full contact on the flat panels as well as in radius of the panels.




Arcoplast Modular Panel Installation Manual 2015


16. With a small roller apply pressure along the termination/transition strip to ensure proper contact to the Arcoplast wall panel.

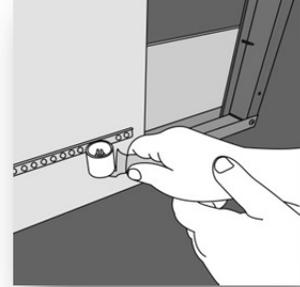


17. To prepare for the application of the Arcoplast finishing compound, apply a low tack 1" (25mm) protective 3M #335 tape on the Arcoplast gel coated panel at ¼" (6mm) above the nose of the termination strip. This application is best achieved with a ruler/mark plastic applicator that enables you to constantly keep the same measurement as well as smoothly pressing out the tape in place.

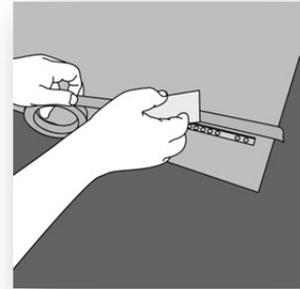

18. Apply a 2" (50mm) masking tape on the termination strip just below the nose of the termination strip. This will protective tape will greatly facilitate the cleaning process after the application of the finishing compound.

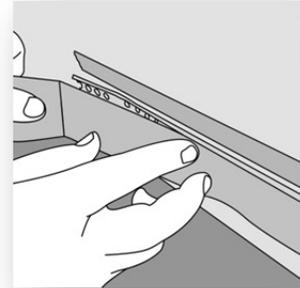


19. Dispense a continuous bead of finishing compound at the top of the termination strip. Make sure that there are no voids or bubbles in the application. With the proper spoon size tool in place the desired radius resulting in a clean, sharp feather edge finish.

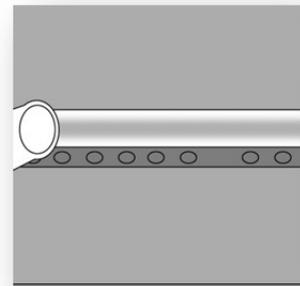


Arcoplast Modular Panel Installation Manual 2015

20. Thoroughly inspect the coved joints for any finish defects. If necessary, dispense an additional bead of compound and re-tool to get the desired level of finish.

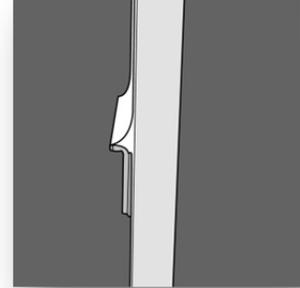

21. Remove immediately the 3M # 335 protective pink tape. Pull the tape away at a slight angle being careful not to pull excess finishing compound on the freshly tooled in place coving section.


22. With a sharp flat putty knife carefully glide over the termination strip edge to remove excess finishing compound. Note: Use the excess compound to fill screw heads below the termination/transition molding or wherever countersunk holes need to be filled.

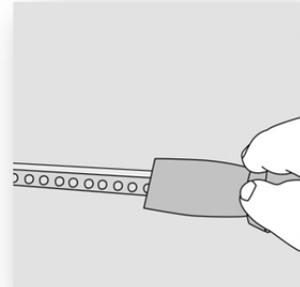

23. Remove the 2" (50mm) protective masking tape and clean area thoroughly.

24. Finally, to complete the seal at the floor and wall junction, apply a 2" (50mm) protective masking tape on the wall panel and the concrete floor. Install the tape at 17/32" (13.5mm) distance from the opposing surfaces. This is a standard measurement for a ¼" teaspoon/tool.

25. Dispense a continuous 3/8" (9.5mm) bead of Arcoplast finishing compound. Make sure the finishing compound fills the 1/8" (3mm) gap between Arcoplast panel and the concrete floor. Immediately cove and tool in place.

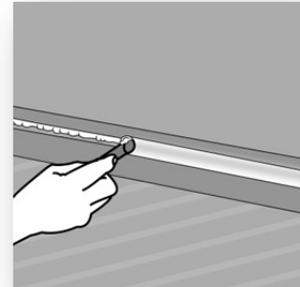


Arcoplast Modular Panel Installation Manual 2015

26. Remove the 2" (50mm) protective masking tape at the wall and floor section. Remove excess materials and clean area with a clean towel and Thermaclean cleaner.
27. Secure and quarantine the area. Do not allow any traffic or trades to do any work in this area for a minimum of 8 hours. This will prevent dust, particles and any mishaps that could potentially contaminate the finish joint section.

Flush Wall/Base Application -


The construction of a flush wall to floor base must be predetermined before the start of the Arcoplast wall panel installation. As described in Chapter 6 – Steel Stud Framing, Reinforcements and Insulation Blankets, Ref. article #4 and Chapter 11 – Panel Installation, Ref. article # 57, the floor base and cove design will dictate the sequence and construction method for the wall panel installation.

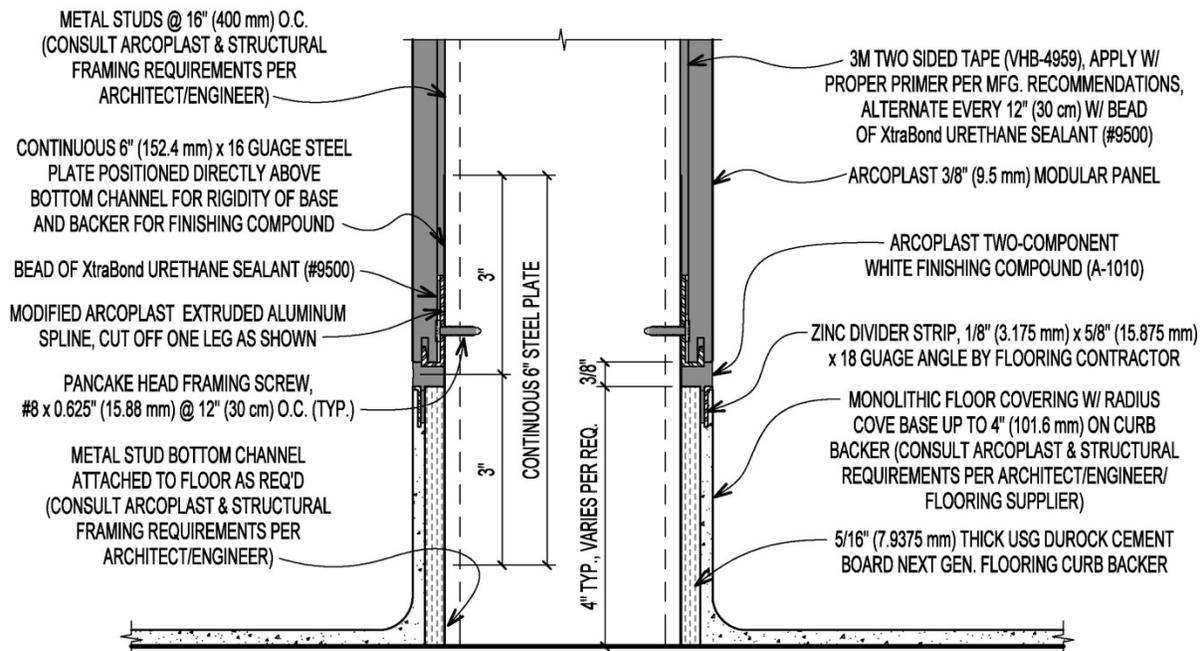


Arcoplast Modular Panel Installation Manual 2015

1. Determine the height of the proposed floor base curb. This will provide the measurement for the continuous metal backing plate and the installation height for the “J” starter strip molding to receive the Arcoplast modular wall panel.


2. Install a 16 G galvanized metal backer plate to the framing members or the furring channels. Fastened the sheet metal backer plate with a thin truss wafer head Philip self-drilling screw # 8 x .0625”. Referenced in drawing BA-12, the sheet metal backer plate should extend from the floor to the top of the termination strip.

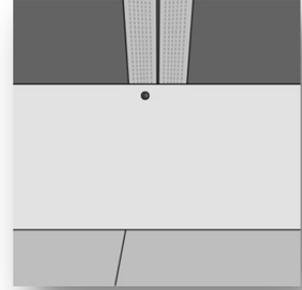

3. With a chalk line or laser alignment mark the height for the “J” starter strip molding. Install at the prescribed height the “J” starter strip molding and fasten with a thin truss wafer head Philip self-drilling screw # 8 x .0625” on 16” (400mm) c/c.

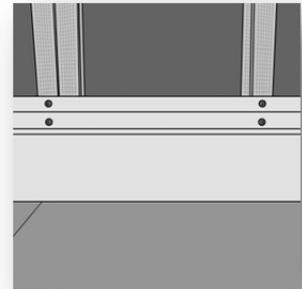


4. Cut the panel to length and make sure the edges are cut clean free of gel coat chips.

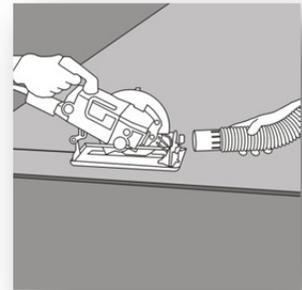


Arcoplast Modular Panel Installation Manual 2015


5. With a router and diamond router bit, groove the bottom of the Arcoplast panel to allow the panel to sit and be retained in the starter strip molding. This routing procedure is usually done at the factory. However, the routing process must be specified on the purchase order.

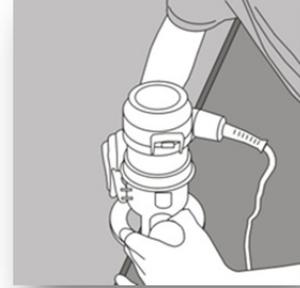

6. With a sand bloc and a #100 grit sandpaper lightly bevel the (gel coat face side) bottom edge of the panel.

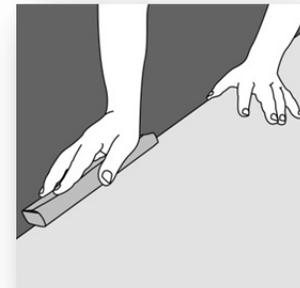

7. Position the panel and carefully glide the bottom of the panel in place inserting the panel kerf in the small leg portion of the "J" starter trim. This will secure firmly the bottom of the panel and eliminates any need for exposed fastener. Note: This routing procedure is usually done at the factory. However, the routing process must be specified on the purchase order.

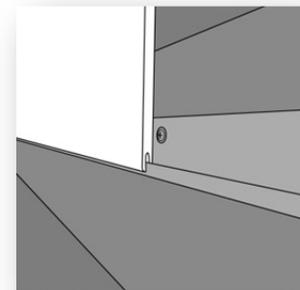


8. Continue the installation as described in Chapter 11.
9. With the Arcoplast panel installation completed, install the temporary joint spacers below the "J" starter trim. The temporary spacers will provide the exacting and consistent joint dimension as shown on the curb drawings.
10. Measure and cut the coving backer board (fiber cement board) to the required dimension. Apply two 3/8" (9.5mm) continuous beads of adhesive to the back of the coving backer board and position in place.




Arcoplast Modular Panel Installation Manual 2015

11. Countersink the coving backer (fiber cement board) and fasten the coving backer board to the metal framing with # 6 x 1" (25mm) drywall screws.

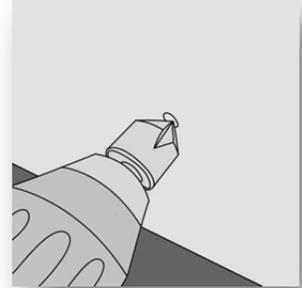


12. Fill the countersink screw head with Arcoplast finishing compound. This step can be completed when tooling the flat joints and the cove sections. Excess finishing compound from tooling of the joints and cove sections can be utilized for this application. Filling in the screw holes will prevent print-thru in the flooring/curb finish.

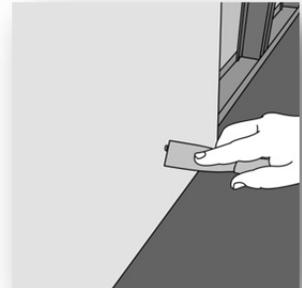

13. In preparation for the installation of the termination strip, apply the 3M # 94 primer to the backer board substrate. Allow to dry thoroughly.
14. Prepare the termination/transition strip and application as described in Chapter 12 Wall to Floor Curb Details - 1. Termination / Transition Strip Application - Articles 7-15.


Note: The application of the finishing compound or flexible sealant in the cove base/ Arcoplast flush panel transition joint can be applied prior or after the application of the flooring coving material. If the flooring cove base material is to be smooth in finish, then the joint application is best completed after the floor coving material is installed. If the proposed flooring coving material is to be aggressive in texture, it is then preferable to have the transition joint filled prior to the floor cove finish application.

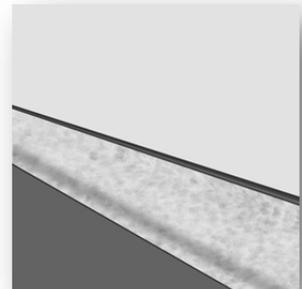


Arcoplast Modular Panel Installation Manual 2015

If the transition joint is to be filled after the flooring cove base is installed, ensure that proper protection of the termination strip is in place to prevent from being contaminated by the flooring installation. Residual material such as the resin and aggregates will create an almost impossible clean application of the Arcoplast finishing compound/sealant. It is critical to have an unobstructed clean termination/transition molding free of any foreign matters. To ensure the termination/transition strip is clean, protect the termination joint by applying a protective low tack tape prior to the application of the floor coving material. Once the floor coving material is installed, remove the protective tape and with a sharp flat putty knife, glide along the termination strip and remove any matters that could potentially prevent a smooth clean line in the application and tooling of the finishing compound.

15. Once the finished floor base material has been applied and properly cured, apply a 3" low tack protective tape centered over the joint.

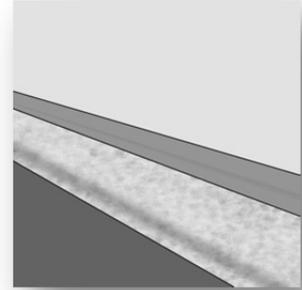


16. With a razor blade, carefully cut the protective tape by gliding the blade on the termination strip. Make sure that no resin or aggregate from the floor application contaminated the edges. Then proceed to cut the tape along the Arcoplast /starter strip molding by gliding the blade along the starter strip. This procedure will leave a clean finish line on both the floor base finish and bottom of the Arcoplast wall panel.

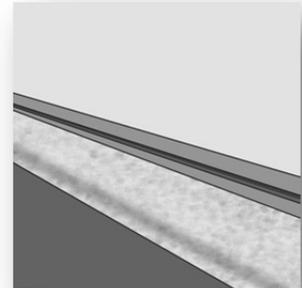


Arcoplast Modular Panel Installation Manual 2015


17. Fill in the joint cavity, ensuring there are no air voids.

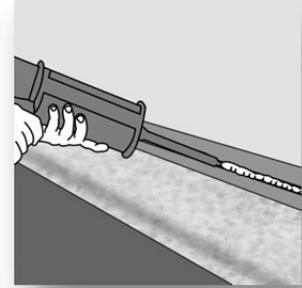

18. With a flat 3M squeegee applicator tool along the joint line. Apply light pressure to the 3M squeegee over the panel edges only. This application method will result in a flat joint with clean edge lines. (Do not apply pressure over the center line as this will create a concave joint). If a flat 3M squeegee is not available, a plastic card or putty knife will also work. Inspect the filled and tooled joint for a perfect finish.

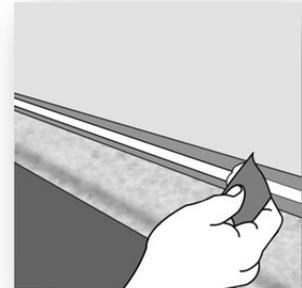

19. Carefully remove the upper and lower protective tapes. Pull the tape away at a slight angle to enable a clean release.

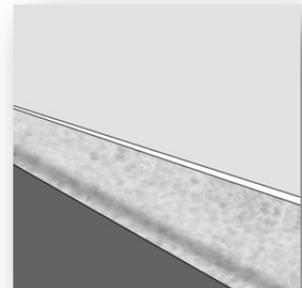

20. With a clean sharp putty knife remove excess sealant and clean area thoroughly with a clean towel and Thermaclean cleaner.

21. Quarantine the area and do not allow any traffic or trades in the work area for a minimum of 12 hours. This will prevent dust, air particles and any mishaps to soil or contaminate the finish joint section.




Arcoplast Modular Panel Installation Manual 2015


Recessed Coving Application -

A reverse coving application is truly the best solution in retrofit construction where the floor coving already exists. The reverse coving is also very effective in new construction where the desired design calls for a recess floor base at the wall and floor junction.

1. Determine the height of the “J” starter trim molding. In retrofit construction, apply the starter strip molding directly to the substrate. For new construction, make sure proper backing for the starter strip molding is in place.

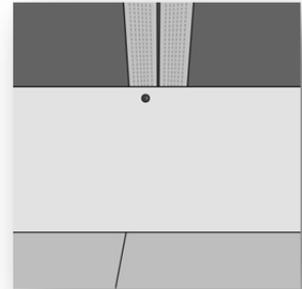


2. Determine the desired cove radius. This radius dimension will dictate the elevation at which the “J” starter strip molding shall be installed. Typically the starter strip molding is installed ½” (12.5mm) above the floor base finish. This will allow a tooling of 2” (50mm) diameter (Tablespoon size) for a proper seal and optimal detailing finish.
3. With a chalk line or laser alignment mark the height for the “J” starter strip molding. Install at the prescribe height the “J” starter strip molding and fasten with a thin truss wafer head Philip self-drilling screw # 8 x .0625” on 16” (400mm) c/c.
4. At the predetermine height, proceed to install the “J” starter strip molding. Fasten with appropriate screws on 16”c/c (400mm).

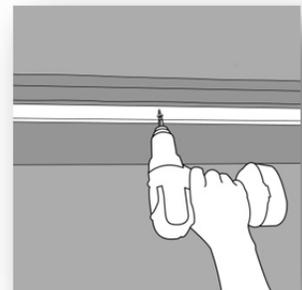


Arcoplast Modular Panel Installation Manual 2015

- When installing the starter strip molding to concrete, brick, masonry surfaces, you must predrill the aluminum starter strip with a 7/64" (3mm) drill bit. With the predrill aluminum starter strip as a template, position over the substrate and mark the predrilled holes onto the existing substrate. With a masonry bit 3/16" (4.763mm) predrill the substrate and insert the plastic shield # 6-8 x 1"(25mm). Position the starter strip and fastened with flat head # 10 x 1 1/4" (31.750mm) screws.


- With a router and diamond router bit, groove the bottom of the Arcoplast panel. This kerf will allow the small leg portion of the "J" starter strip to be inserted into the panel groove securing firmly the bottom of the panel and eliminating any need for exposed fastener. Note: This routing procedure is usually done at the factory. However, the routing process must be requested on the purchase order.

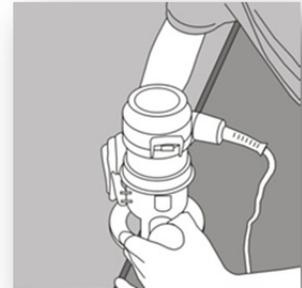

- With a sand bloc and #100 grit sandpaper lightly bevel the bottom edge (gel coat face side) of the of the panel.

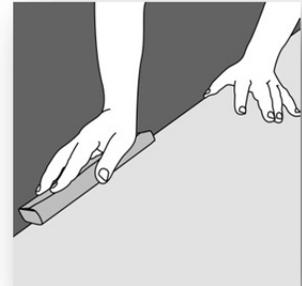


- Position the Arcoplast panel over the starter strip and carefully glide the panel in place. Ensure the panel is well seated in the starter strip with the small leg portion of the "J" starter strip well positioned in the panel groove.

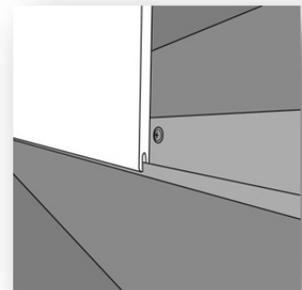


Arcoplast Modular Panel Installation Manual 2015

9. Complete the panel installation as referenced in Chapter 11- Panel Installation.
10. Having completed the panel installation, clean thoroughly the underneath section of the recessed cove section, panel edge and floor cove surface with IPA 50/50 and water solution. Wipe clean and allow to dry thoroughly.
11. Apply the protective 3M # 335 x 1" (25mm) low tack tape along the edge of the bottom of the Arcoplast panel. Leave exposed only 1/16" (1.5mm) of the bottom edge of the panel.
12. Apply a second protective low tack painter's tape 2" (50mm) on the floor coving section. Carefully apply the protective tape just on the top portion of the cove that will coincide with the tip of the tooling spoon typically 1/2" (12.5mm).
13. Note: Whenever the existing or new cove base surface is extremely aggressive, apply multiple layers of the 2" (50mm) masking tape. The multiple layers of tape will make the tooling spoon glide over surface finish a lot smoother. This method will minimize the transfer of energy through the tooling spoon resulting in a smoother detailed cove section.
14. In a wet wash down environment it is preferable to complete the reverse coving detail after the floor cove finish has been installed.

15. The reverse coving is tooled in place with a kitchen spoon. Select the appropriate diameter to achieve desired radius and finished look.

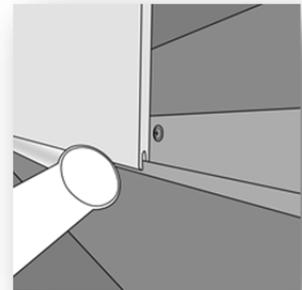


16. Dispense the Arcoplast finishing compound in a continuous bead form ensuring there are no voids. Tool immediately using the proper tooling spoon. Note: Most floor base elevations are very low. A small mirror will help visualize and inspect the application and detailing of the cove section.

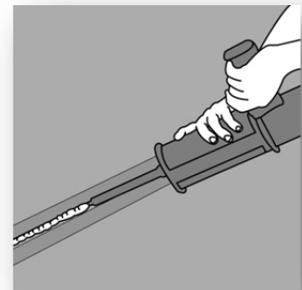

Arcoplast Modular Panel Installation Manual 2015

17. Once the finishing compound has been tooled in place, remove the excess compound from the face of the panel with clean sharp putty knife. Position the blade flatty against the gel coat panel and glide over the 3M # 335 protective tape removing the excess compound and the remove the excess compound on the cove section.

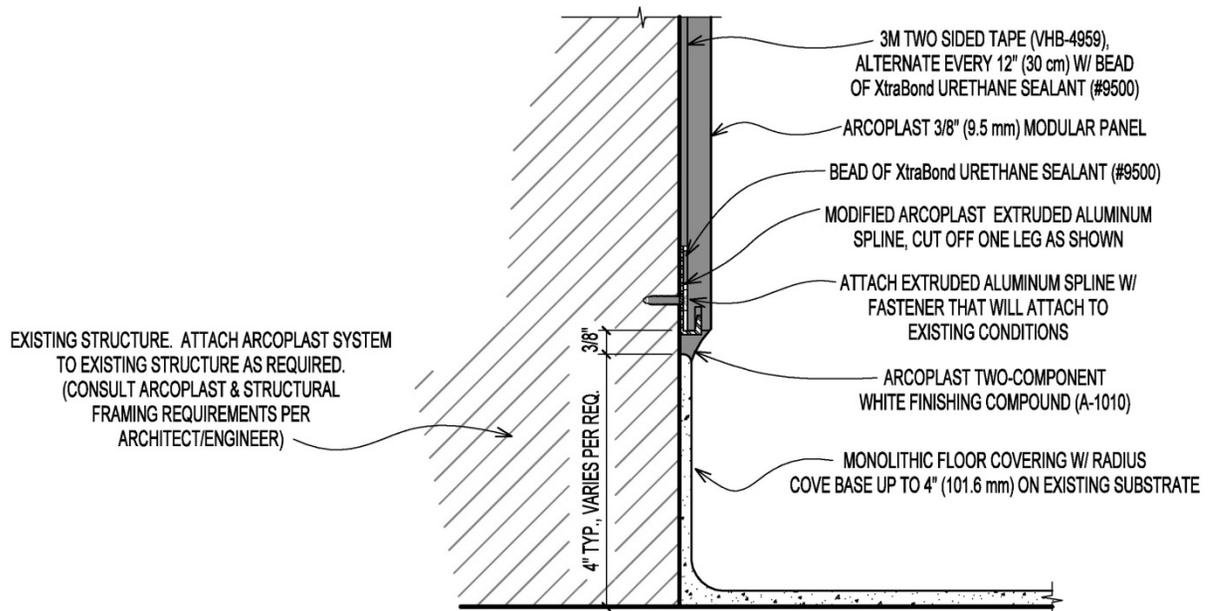

18. After the cove tooling is complete, remove the 3M # 335 protective tape on the Arcoplast panel. Pull the tape at an upward angel and then remove the second protective tape on the floor coving section by carefully pulling down the tape at a slight angle. This will prevent dragging the freshly tooled compound and contaminating the surrounding surfaces.
19. Secure the area and do not allow any traffic or trades to do any work in the quarantine work area for a minimum of 12hours. This will prevent dust, air particles and any mishaps to contaminate the finish joint section.



Chapter Fifteen : Finishing Details -

For BSL-3, ABSL-3, BSL-4 and high containment construction, it is recommended to set up a small mock-up room with a completed panel to panel joint, a wall to wall interior/exterior corner junction, a wall to ceiling and a wall to floor junction including the MEP seals. This mock-up room should also be tested for compliance with negative/positive air pressure decay requirements.


The approved mock-up room should be designated as the bench mark for quality in craftsmanship, aesthetic and high performance. Preferably this mock-up room can be incorporated in the future floor plan layout.

In preparation for the application and the detailing of the finishing compound/sealant, follow these simple steps and procedures.

1. Remove unnecessary tools and equipment from the work area. Isolates the area to prevent other trades, traffic and air flow movements that could potentially contaminate the application and compromise the detailing of the Arcoplast finishing compound.



2. Tape and seal window and door openings, skylights, air supply and exhaust fans, floor drains, etc.

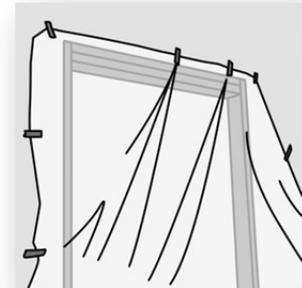

Arcoplast Modular Panel Installation Manual 2015

3. Vacuum floor and cove section. Mop/sponge floor to remove dust particles.



4. Peel back and cut off "4 (100mm) of the protective plastic film at the perimeter of the Arcoplast modular panel. Use caution to not cut into the gel coated surface.




5. For ceiling liner panels, it is preferable to remove the entire plastic film prior to the application of the finishing compound. For wall liner panels you can elect to leave or remove the plastic film before the application of the finishing compound. If you do decide to remove the protective film, you will have to be very careful to not damage the gel coat surface with equipment or tools and not drop or smear any finishing compound onto the wall surfaces when tooling the ceiling joints and coving sections.

Note: If you decide to leave the protective plastic film on the panel, ensure the protective film is free of dust. The static surfaces will draw the dust particles and contaminate the finishing compound.




Arcoplast Modular Panel Installation Manual 2015

6. With a damp soft towel or cloth, clean thoroughly the Arcoplast panel joints and panel intersections with the Arcoplast Thermaclean solution. The Arcoplast Thermaclean water base solution is an excellent surface prep and a very effective cleaning product.

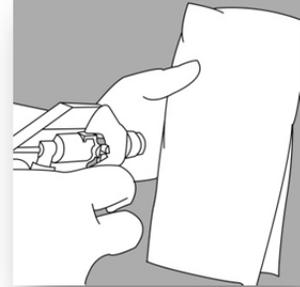

7. Remove all dust particles and contaminants at the panel joints and at the interior/exterior corner junctions. The slightest foreign matter will show through the finishing compound. This is especially important at panel intersections and coving sections. Because the finishing compound is featheredged at the cove extremities, it becomes more translucent as the sealant applied becomes thinner, highlighting areas that have not been well cleaned and well prepared.

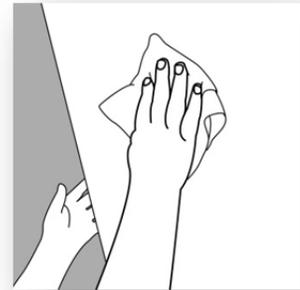

8. Inspect for surface imperfections that could create an obstacle when tooling the finishing compound.
9. Use a putty knife for flat joints and plastic spoon for the radius coving in corner junctions and glide the tools lightly along the length of the panel joints and along the interior corner sections. The tool must glide freely without any obstacles or nicks on the panel. Contaminants or surface imperfection that can be felt with the tool will be transferred in the finishing compound by the tooling at the application resulting in unsightly cosmetic finish.
10. Correct any nicks or surface imperfection prior to the application of the 3M # 335 protective tape. With sharp razor blade scraper excess contaminants or with a light sanding paper lightly (1,000 grit) sand the surface imperfection. Polish the area with 3M buffing compound. Ref. Chapter 16 Gel Coat Repair – Type A Repair Surface Imperfections.
11. Ensure the panel joints and panel intersections are thoroughly dry prior to the application of the 3M # 335 protective tape.




Arcoplast Modular Panel Installation Manual 2015

12. The 3M # 335 protective tape is a clear pink tape allowing the applicator to see where the tape is being applied on the back-drop of the white gel coated panel. The 3M # 335 tape is extremely thin enabling a seamless transition of the finishing compound to the panel's gel coat surface. The 3M #335 tape is also a low tack tape making it easy to remove leaving no residual markings.
13. When handling and installing the 3M # 335 tape, always keep the roll of tape in a clean protected plastic bag. Do not lay the roll of tape on its side on contaminated surfaces and equipment. Store the 3M # 335 tape in a plastic bag when not in use. This will prevent any contaminants from adhering to the cut edge of the roll of tape. If not protected, small particles that adhere to the side of the roll of tape will be transferred and will stick to the sealant being applied and be permanently embedded in the edges of the finished joints.
14. The application of the 3M # 335 x 1" (25mm) wide protective tape should be completed in three phases:


Note: Variance in room dimension, room height, quantity of openings and type of services will greatly influence the work flow. The following steps herein described apply to a normal laboratory environment of 400 square feet (35 meters square).

- a) Phase I –First, start with the panel to panel joints on wall and ceiling surfaces by applying the 3M # 335 x 1" (25mm) protective tape on the edges of the panel. This is referred to as the "flat joints". Secondly, proceed to apply the 3 M # 335 x 1" (25mm) protective tapes at the vertical panel to panel interior/exterior corner sections. This is referred to as the vertical coving sections. In the third step, proceed with the application and detailing of the finishing compound. At every joint and cove sections completed, immediately remove the protective tape and allow the joint and cove section to cure for a minimum of 12 hrs. See Chapter 14 Application and tooling of Arcoplast finishing compound.

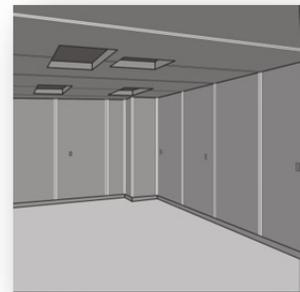


Arcoplast Modular Panel Installation Manual 2015

- b) Phase II – In the second phase, apply the 3M # 335 x 1” (25mm) wide protective tape at the top of the wall panels around the perimeter of the room and on the ceiling panels along the ceiling perimeter at the wall junction. This is referred to as the “crown detailing”. The tape should be applied only when the flat vertical joints and flat ceiling joints and vertical coved corners have been completed with the sealant and cured sufficiently to not damage the sealant bead and coving. Secondly, proceed to apply the 3M # 335 x 1” (25mm) wide protective tape around door and window frames, MEP accessories and equipment. In the third step, proceed with the installation of the finishing compound and allow to cure for a minimum of 12 hrs. See Chapter 14 – Application and tooling of Arcoplast finishing compound.
- c) Phase III – The third step is the application of the 3M # 335 x 1” (25mm) low tack protective tape over the floor base termination strip. Determine the desired cove radius over the transition molding and with a jig measurement proceed to install the protective tape. Finally apply 2” (50mm) low tack painter’s masking tape over the termination strip just below the finish edging. Proceed with the application of the finishing compound and tool accordingly. Note: The different types of wall to floor cove base finishes will dictate the type of joint finish, however they will still be part of the Phase III installation procedure. See Chapter 12 Wall to Floor Curb Details.
15. On the panel joints, apply the 3M # 335 x 1” (25mm) wide protective tape carefully following the panel’s edge. Do not apply the tape in the radius edge of the panel. Ensure there are no crimps in the tape or large air blisters that could create a distortion in the finished application of the sealant. It is also preferable not to splice the 3M #335 tape.

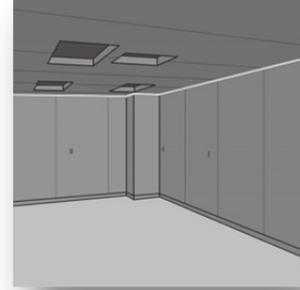

Arcoplast Modular Panel Installation Manual 2015

16. Tape on each side of the panel joint. The tape should be parallel and straight allowing the future joint compound to be consistent in dimension and reflect nice straight uniform lines. Tape spacing is defined by the panel joint tightness, typical joint tape spacing can vary from ¼" (6mm) to 3/8" (9mm).

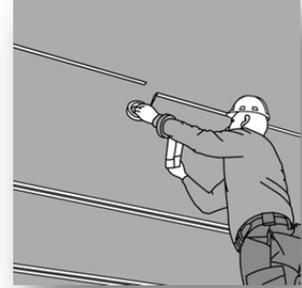

17. When applying the protective tapes always extend the tape by 1" (25mm). This will create a "tab" longer than the end of the panel joints. Also extend the same length on the tape at interior and exterior coving sections. These extended "tabs" will greatly facilitate the removal of the protective tape.
18. For the coving and detailing of the interior wall to wall and wall to ceiling junctions, the 3M # 335 protective tape should be applied at 17/32" (13.5mm) distance from the opposing surface. This measure is a standard for a 1 5/32" (30mm) ¼" teaspoon measurement. Note: Different type of spoons should be measured to get accurate spacing.
19. When applying the 3M # 335 low tack protective tape, a measuring "jig" type tool modeled from a plastic card works best. Mark the edge of the plastic card for the spacing of the protective tape. Position the protective tape underneath the plastic card at the marked location. Glide the card along the panel whilst distributing the tape at the same time. This application method will provide constant and accurate location of the protective tape in one simple step.



Chapter Sixteen : Application and Tooling of Arcoplast Finishing Compound -



The Arcoplast finishing compound is a two component equal mix, bright white, high strength aliphatic urethane adhesive/sealant. The finishing compound is used to bond and seal the Arcoplast glass fiber reinforced composite panels and bonds to acrylics, aluminum and stainless steel. The Arcoplast finishing compound is a non-porous, non-yellowing, high gloss moisture sensitive compound. It is environmentally neutral after curing and has no odor even while curing.

Note: Read product and MSDS information before use.

The Arcoplast finishing compound foil packet contains:


1. Twin cartridge 200 ml
2. Static dispenser nozzle
3. Static dispenser nozzle lock nut

The Arcoplast finishing compound is dispensed with a twin cartridge 400ml manual or a pneumatic tool.

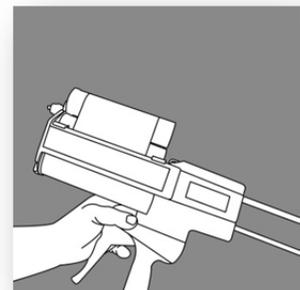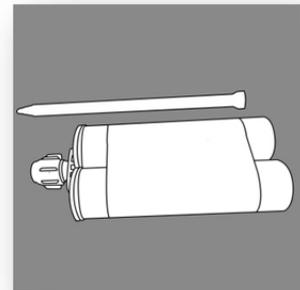


Arcoplast Modular Panel Installation Manual 2015

1. The application and detailing of the Arcoplast finishing compound is best when applied at the temperature range equal to that of the service life of the intended environment. If the intended service life of the room is to be 70⁰ Fahrenheit (20 C) degrees, then the application is best at the same temperature range.
2. The temperature, relative humidity and moisture influence the work, tooling and cure times. A typical installation at 70⁰ F (21c) and 40% relative humidity will average 30 minutes of work time. The handling time (print free) is approximately 12 hours. An installation at 90⁰ F (32C) and 60% relative humidity may average 15 minutes of work time. Handling time is approximately 6 hours. The maximum and full cure time is achieved at 72 hours.
3. Each dual cartridge is packaged and sealed in an aluminum foil pack. Remove the cartridge from its original packaging only when ready to use.
4. Remove the cartridge nozzle nut and detach the safety clip and remove the nozzle plug.

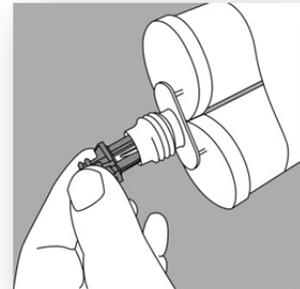


5. Engaged the twin cartridges in the dispenser by gliding the cartridge nozzle ridge in the dispenser groove section of the tool. Push the twin cartridge firmly in place. Note: When not using or dispensing the Arcoplast finishing compound always ensure that the plunger is released. For a manual dispenser, release by holding the lock lever down and pulling the plunger back. For the pneumatic dispenser, depress the red pressure button situated at the back of the handle and the plunger will automatically retrieve. To replace a cartridge, on the manual dispenser pull out the empty cartridge. On the pneumatic dispenser, depress the lock button situated under the dispenser and glide the twin cartridge out.

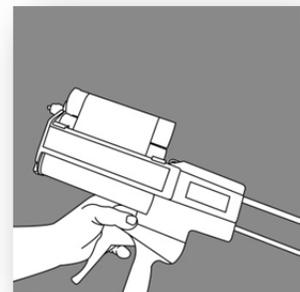


Arcoplast Modular Panel Installation Manual 2015

6. Prior to installing the static mixer nozzle, place the unit over a waste basket, start dispensing the finishing compound until both part A and part B are equally dispensed at the end of the cartridge nozzle opening. Wipe the excess at the end of the cartridge nozzle.

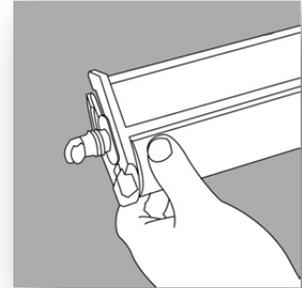

7. Install the static mixer nozzle that is included in the aluminum foil pack. Secure the nylon static mixer with the cartridge nylon nut.

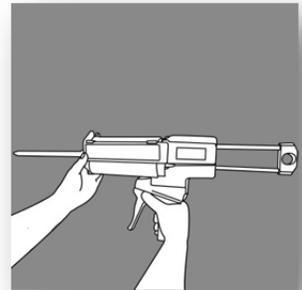


8. With the static mixer nozzle fully secured, dispense in a waste basket approximately 1" (25mm) bead of finishing compound. This procedure ensures that the part A and part B are mixed equally. Release the plunger and wipe clean. Apply the finishing compound in the panel joint and coving corners. Note: If the cartridge is idle or not dispensing material through the static mixer nozzle for a short period of time (approximately 10 minutes) it will require the installation of a new nozzle. Plan well your application and tooling time to make the most use of the application nozzle. Various joint sizes may require you to cut the static nozzle to achieve proper bead size.




Arcoplast Modular Panel Installation Manual 2015

9. On the flat panel to panel joints and the cove intersections, dispense the finishing compound with a pneumatic tool. When dispensing the finishing compound create the least amount of knuckles or bulges in the application. This is best achieved with a constant equal movement of the tool with the arm movement motion from top to bottom. Note: It is always best to “Pull” the finishing compound then to “Push” the finishing compound. This application method will help avoid air entrapment that could potentially form a blister or bubble in the compound during the curing process.

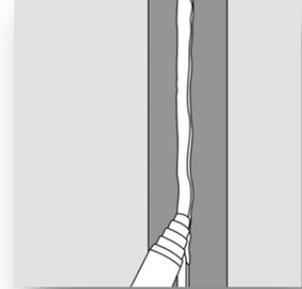


10. Dispensing and tooling the Arcoplast finishing compound is best achieved in two phases.
11. On the first day, complete the flat joints on both wall and ceilings panels. Then complete the vertical interior and exterior coving sections. If there are no intersecting joints at door and window frame sections, time permitting, complete these coving sections as well. Note: Completing Intersecting joints with the finishing compound such as a four ways or tri corner junction is impossible to achieve in the same day. For that reason, it is best to complete the flat and vertical cove joints. Allow the application to cure for 12 hours before tooling over joint crossings or intersecting junctions. These difficult sections become easy to tool once the intersecting joint has cured.

12. On the second day proceed to apply and cove the wall to ceiling junction referred to as the “crown sections” and the coving of the termination strip at the floor base.

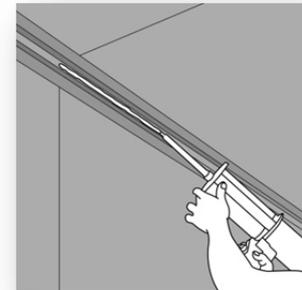


Arcoplast Modular Panel Installation Manual 2015


13. Arcoplast finishing compound is best tooled with a plastic base tool. Various shapes and sizes can be used in the application to achieve the desired shape, dimension and aesthetics.

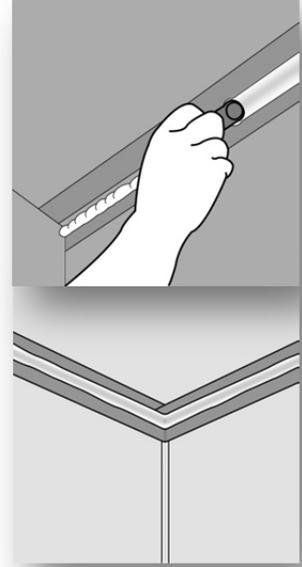

14. For the flat joints and coving sections, make sure the nozzle size will dispense a bead large enough to fully fill the gap. Do not apply multiple layers or multiple small beads of finishing compound in a joint. This will generate air entrapment resulting in blistering or aerated issues.

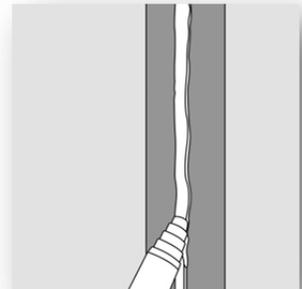


15. For tooling and detailing, a flat 3M squeegee applicator works best for flat joints. A plastic card or putty knife will also work if the 3M flat squeegee applicator is not available. Do not apply pressure over the panel joint as this will create a concave joint. It is best to apply pressure on the applicator directly over the edge of the Arcoplast panel, this will result in a flat well feathered crisp joint line.

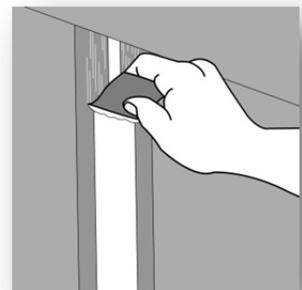

Arcoplast Modular Panel Installation Manual 2015

16. The radius cove at wall to wall, wall to ceiling and wall to floor is best achieved with a round plastic spoon. The edge of the spoon must be clean and sharp enabling a smooth free flowing perfectly shaped radius delivering a clean feathered edge joint line. Preferred spoon tool is the Kitchen Aid brand. Note: If the spoon edges are not perfectly smooth, use a 1500 wet sand paper and lightly rub the spoon edges to obtain a very smooth tool edge.

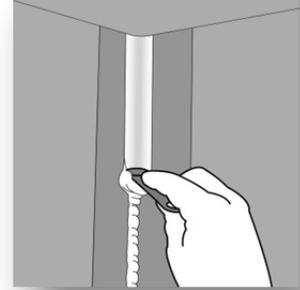


17. For the best results on detailing a flat or cove section, a two pass step process will produce the best results. On the first pass, apply light pressure on the detailing tool and glide the tool along the joint or cove section with a constant uninterrupted motion. Proceed with this method for the entire length of the joint or cove section. This step allows the spread of the finishing compound evenly and picks up the excess compound. Do not be concern with the overflowing of the finishing compound over the protective tape. The excess material will be removed with the removal of the protective tape. Remove the excess compound from your tool and clean the tool thoroughly with Thermaclean and wipe dry. Immediately repeat this application in a second pass, this time with moderate pressure again moving uninterruptedly along the joint and cove section.
18. When noticing a lack of finishing compound through the tooling process, stop and immediately re-dispense a small and continuous bead of finishing compound for the entire length of the joint. Repeat detailing procedure # 17.
19. If a blister should develop in the joints, it is best to immediately remove the finishing compound and re-apply a new bead of compound and retool the joint. If there are several blistering issues, clean out the entire joint and re-apply a new bead of finishing compound and retool for a perfect finish.




Arcoplast Modular Panel Installation Manual 2015

20. As specified in the panel installation, a 1/8" (3mm) gap in the panel junction of wall to wall and wall to ceiling and wall to floor was designed to receive the Arcoplast finishing compound. Make sure to fill the joint by keeping the nozzle well in place and the dispensing motion pushes the finishing compound deep into the gap for the full thickness of the panel.

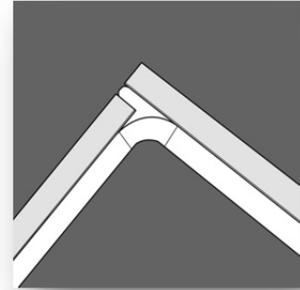


21. Important note on pre filling coving section. If a space/gap in the coving sections at wall to wall and wall to ceiling and wall to floor is larger than 1/8" (9.5mm) it is best to prefill the coving section gap. This is best achieved by inserting the small nozzle section in the gap and proceed to fill the gap the full 3/8" (9.5mm) depth along the entire coving section. Do not overfill at this time as this will interfere with the second application and tooling of the finishing compound. Once the gap has been filled, you may proceed immediately with a second application, however if you notice this second application of the finishing compound has a tendency to sag, immediately stop and allow the prefill to cure and complete the coving section the following day.
22. Do not dispense the finishing compound more than the ability to tool and detail the application. To best manage the application, appoint a technician for dispensing of the finishing compound. A second technician for tooling and detailing the joint. A third technician to remove the protective 3M # 335 tape and to assist the other technicians with product and equipment flow.

23. Immediately remove the 3M protective tape. Remove the tape by pulling away from the surface at a 45° angle. With a sharp 1 1/2" (37mm) painters putty knife remove excess finishing compound that could have overspill on the Arcoplast panel. Clean the surface thoroughly with the Thermaclean cleaner. Be careful to not leave any smear marks. (This usually happens when the cleaning towel/rag is not changed at every wipe). Any unclean smear marks will remain permanent.

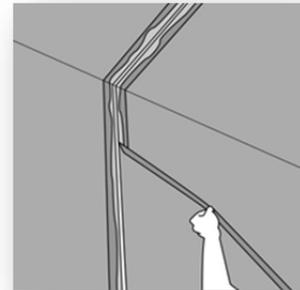


Arcoplast Modular Panel Installation Manual 2015

24. Carefully remove the 3M # 335 protective tape at the coving sections by pulling away from the surface at a 45° angle. Do not leave long sections of tape loose, the static generated will pull the tape to the panel and possibly soil the panel surface.

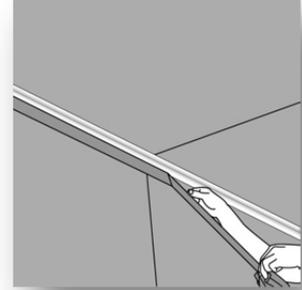

25. Once the protective tape has been removed, inspect the finishing details carefully. If there are any tape lines left by the excess finishing compound, remove immediately with a clean sharp putty knife. A 1 1/2" (37mm) painters putty knife works best. Remove the excess by carefully gliding the clean sharp blade along the very edge where the tooling spoon rubbed on panel surface. Follow the joint line carefully scraping up all excess compound. Scrape and remove excess until both sides of the joint are completely clean leaving a clean featheredge finish. The Arcoplast Thermaclean Wipe Bright 095-0082 for this application.

26. When removing excess finishing compound it is important to clean the area two to three times using a new cloth or soft towel every time. This procedure is necessary until you are sure there are no smears or traces of diluted compound.

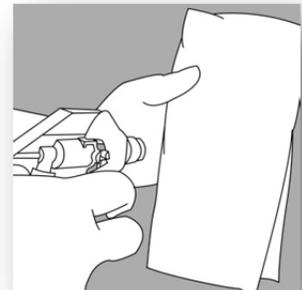


27. With every pass/strike of a tool, always wipe off excess finishing compound picked up with the tool, this ensures a clean tool for the next pass/strike.
28. After a complete and satisfactory review of the completed application of the finishing compound allow to dry and cure for 12 hours based on a 70°F (21C) ambient temperature.



Arcoplast Modular Panel Installation Manual 2015

29. If you had elected to not remove the plastic film prior to the application of the finishing compound, proceed to now remove the protective plastic film on the Arcoplast gel coat surface by starting with the ceiling panels first and then the wall panels.

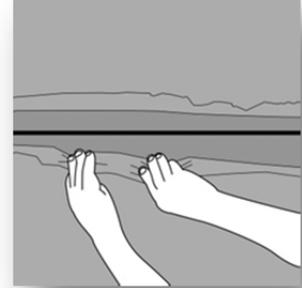

30. Proceed with a final inspection of the Arcoplast gel coat modular panels. If any scratches or gel coat defects are found, proceed to repair and polish. Ref. Chapter 16 Gel Coat Repair.

Specific applications may require customizing a static mixer nozzle. Example - the filling of a panel kerf prior to inserting the aluminum spline. Customizing the rigid nozzle to a compressible tip will make the dispensing easier and more accurate.




- a. Use a large plastic straw similar to a milk shake plastic straw and cut in lengths of 3" (75mm).



Arcoplast Modular Panel Installation Manual 2015

- b. Insert the plastic straw over the dispenser nozzle and tape the plastic straw to the plastic nozzle.

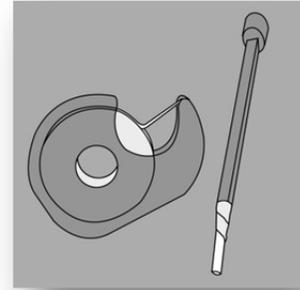

31. Proceed to dispense a 1" (25mm) of finishing compound to ensure the part A and part B is fully mixed. The modified nozzle is ready for use.

Chapter Seventeen : Mechanical – Electrical - Plumbing – Equipment – Fire Suppressant & Monitoring Systems -

One of the more challenging task in the construction of high containment facilities is addressing the application of sealants for a wide-ranging variety of services. Substrate compatibility and surface adhesion for a large variation of metals, plastics, and glass fiber composite materials is critical for a high performance seal capable of meeting BSL-3, ABSL-3 and BSL-4 and cGMP compliance.

Points to consider in the construction of high containment facilities:

1. Substrate compatibility to different MEP products
2. Expansion, contraction and vibrations of various services
3. Backer materials to reduce void fillings
4. Test reports on various applications
5. Primer selection and sealant application
6. Form, dimension and aesthetics
7. Tooling method for the various applications





Arcoplast Modular Panel Installation Manual 2015

Electrical Box Style Penetrations –


In high level containment construction, there are essentially two methods of treating the services interfacing with the primary barrier surfaces. The majority of these services deal with electrical, alarm and monitoring devices that require surface mount or concealed gang box installations. To achieve a moisture, air and gas tight installation of concealed or surface mount devices interfacing with the Arcoplast composite panels, follow these simple steps:

1. Ensure the gang/service device boxes are properly located, installed square, plumb with proper depth.
2. Mark the location and dimension of the penetrations on the panel. Allow 1/8" (3mm) clearance between the accessory and the Arcoplast panel cut-out creating a proper seating for the finishing compound.
3. Connect the multiple penetrations by a cut line, extending the cut line to the outer border of the penetrations.
4. With a drill and proper diamond bit size, bore a hole at each intersecting line.
5. Smaller cut outs can be accomplished with a jig saw and diamond jig saw blade.

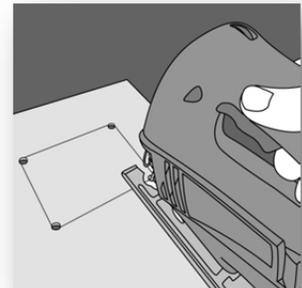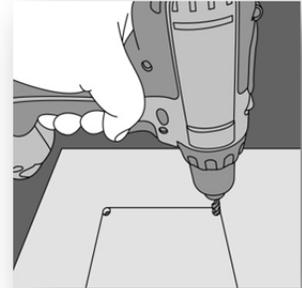


Arcoplast Modular Panel Installation Manual 2015


6. Large area cuts can be completed with a 4" circular saw with diamond saw blade.
7. Circular saw cut outs can be completed with an orbital jig saw with a diamond saw blade.
8. With a sand block and 100 grit sand paper lightly sand the edges of the cut out.
9. With a clean towel and IPA / water 50/50 solution remove all dust and contaminants from the back of the panel, panel edges and finish gel coat surface.
10. Remove any oils and contaminants on the face the perimeter of the gang/service device box wherever the finishing compound/sealant will be in contact. Allow to dry thoroughly.
11. Install 3M VHB tape and liquid adhesive as described in Chapter 11 - Panel Installation.
12. Prop in place the Arcoplast composite panel with the cut out positioned precisely in line with the service (gang) box and allow adhesive to cure for 24 hrs.

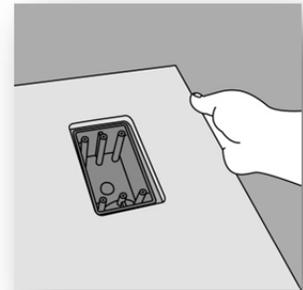

13. Once the Arcoplast panel bond has been ensured, seal the utility (gang) box with the Arcoplast finishing compound/sealant.

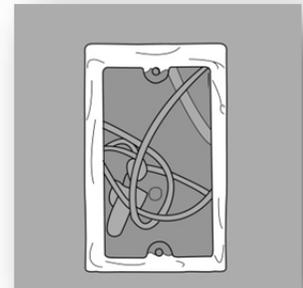

14. Clean thoroughly the face/trim plate and immediately apply a bead of Arcoplast finishing compound to the back of the face/trim plate.

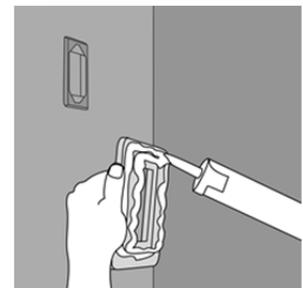


Arcoplast Modular Panel Installation Manual 2015

- Position the Arcoplast face/trim plate sleeve connection and press firmly in place over the gang/service device box. Ensure full contact and a perfect fit.




- Temporarily secure in place the Arcoplast face/trim plate/sleeve connection. This can be accomplished by mechanically fastening to the device box or taping the trim piece to the Arcoplast panel. Allow to set and cure, typically 12 hours. Remove excess finishing compound at the junction of the trim sleeve and the device box. Finally clean thoroughly the edges of the face/ trim plate interfacing with the gel coat surface.

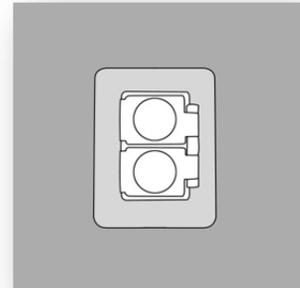

Piping Style Penetrations -

- Proceed to mark the location of the penetration on the gel coat face of the panel.
- With a drill and proper diamond keyhole size proceed to cut the opening from the gel coat face.

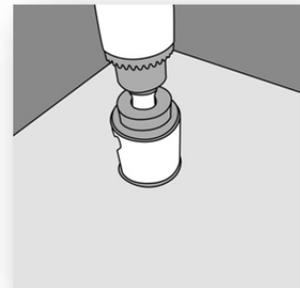


- Large diameter openings will require an orbital jig saw with a diamond blade.




Arcoplast Modular Panel Installation Manual 2015


4. Bore or cut at 1/8" (3mm) larger all around the protrusion. This allows seating for the finishing compound.

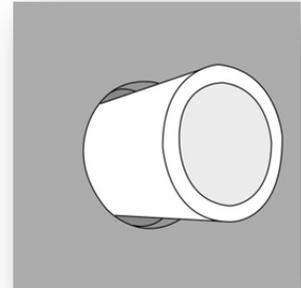

5. For the application of the finishing compound/sealant, apply a 3M painter's protective low tack tape. Allow proper size opening in the tape for tooling the sealant. The protective tape will make the cleaning process easier.

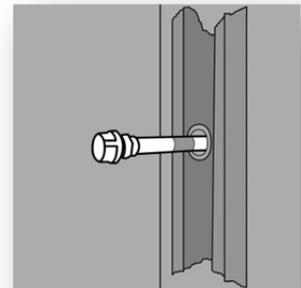

6. Carefully clean the gel coat surfaces, the panel cut-outs and the protruding services with IPA and 50/50 water solution. Allow to dry thoroughly.

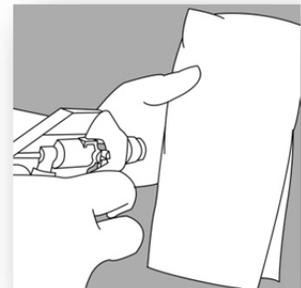

7. With a hand held dispenser, apply a 3/8" (9.5mm) bead of finishing compound around the conduit and equipment. Ensure that the finishing compound has been pushed in the 1/8" (3mm) gap for a perfect and robust seal.




Arcoplast Modular Panel Installation Manual 2015

8. With proper tooling dimension (spoon size) proceed to detail the cove in place.




9. Remove the protective tape. With a clean putty knife, remove the excess of finishing compound and clean the area thoroughly with a clean cloth and Thermaclean cleaner.

10. Arcoplast completed coving section for pipe and conduit penetrations.

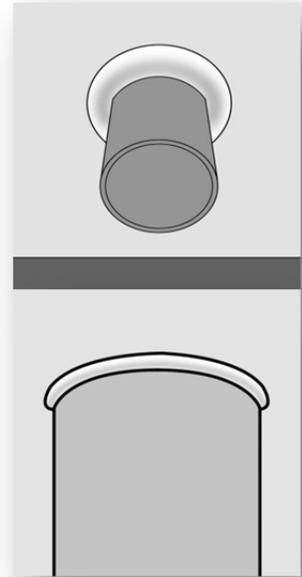


Arcoplast Modular Panel Installation Manual 2015

1. Determine the location and proper pilot hole size for the fasteners.
Drill hole in panel using care to use high quality and sharp drill bits.

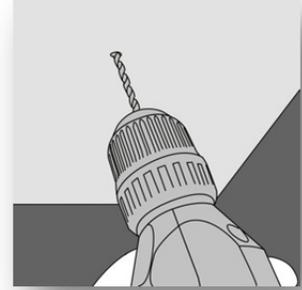


2. With a pipe cleaner saturated in IPA solution, insert the pipe cleaner in the perforation and make sure the opening is thoroughly cleaned. Allow to dry thoroughly.

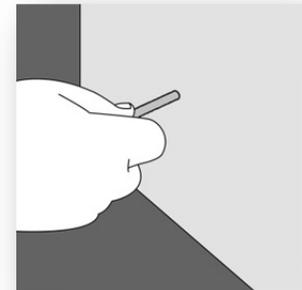


3. Wipe surface area with a clean dry towel.

4. With the hand held dispenser insert the Arcoplast finishing compound in the opening.

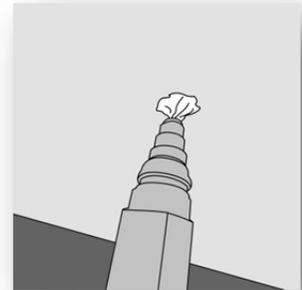


Arcoplast Modular Panel Installation Manual 2015

5. Position in place the screw and fasten in place. Do not over tighten the fastener.

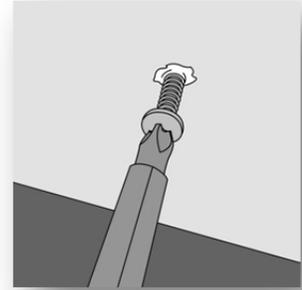


6. For surface mounted plates and brackets, dispense a bead of finishing compound and tool in place. Remove excess finishing compound and carefully clean around the fastening plate/bracket.

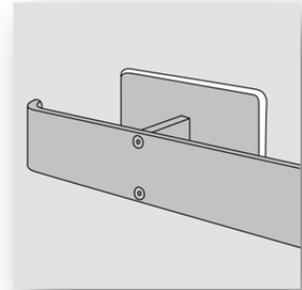

Lighting Fixtures -

1. Position the lighting fixture in place. Mark the mechanical fastener locations and the hole for the wiring feed to the fixture. Remove the lighting fixture and proceed to drill pilot holes for the fixture's holding screws.

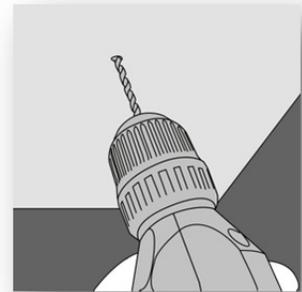


2. Bore the proper size hole for the electrical wiring feed allow 1/8" (3mm) gap for the application of the Arcoplast finishing compound.




Arcoplast Modular Panel Installation Manual 2015


3. Clean the pilot holes and the electrical wiring feed opening. With a pipe cleaner saturated with IPA solution clean and allow to dry completely.

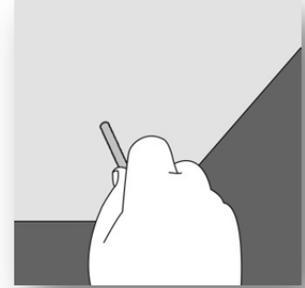

4. Fill the pilot holes, pull in place the wire feed and seal with the Arcoplast finishing compound/sealant.

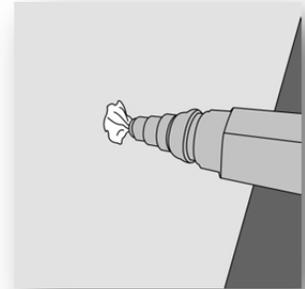

5. Position and fasten the lighting fixture in place.

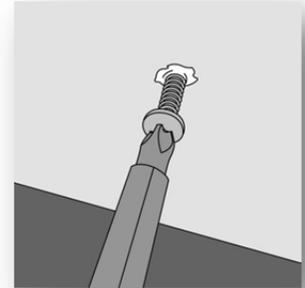


6. Remove the excess finishing compound and clean area thoroughly.
7. The lighting fixture permanently in place, apply the 3M # 335 protective low tack tape around the perimeter of the light fixture. Also a second 3M # 335 tape on the ceiling panel. Leave sufficient space for the ½" (12.5mm) radius coving = 1/4 (1.25ml) teaspoon.
8. Once the tape has been applied to the fixture housing and on the ceiling surface around the lighting fixture, proceed to dispense a continuous 3/8" (9.5mm) bead of finishing compound.



Arcoplast Modular Panel Installation Manual 2015

9. With the proper tool (spoon size), tool and detail the coving section.

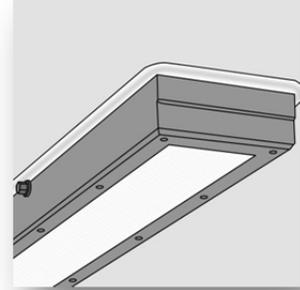


10. Carefully remove protective tape pulling the tape at a 45° angle. Remove any excess of finishing compound with a sharp edged putty knife and clean the surfaces thoroughly with the Arcoplast Thermaclean cleaner.
11. Inspect for a perfect finish and seal. The Arcoplast finishing compound will be tack free in 12 hours. Maximum cure time 72 hours.

Note: Recessed fixtures, air diffusers and supply housing units interfacing with the Arcoplast panel (primary barrier) should also be meticulously sealed with the finishing compound.

For existing services, equipment and protrusions that are permanently affixed and cannot be removed or relocated follow these simple steps:

1. Take precise measurements of the penetrations and location of the existing services.
2. Transfer the readings on the gel coat surface of the panel.
3. Determine the most favorable cut angles and method of installing the panel in reference to the protruding equipment and services.
4. Cut out the protrusion and cut the angle lines leading to the edge of the panel.

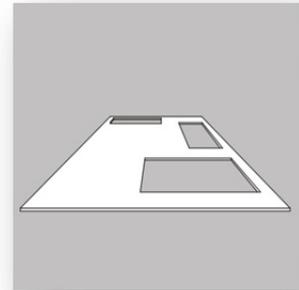

Arcoplast Modular Panel Installation Manual 2015

5. With a sanding bloc, sand and lightly bevel the cut edges on both the panel and the filler piece.
6. Small cut out sections do not require a spline attachment. Large filler pieces 16" (400mm) or greater will require the edges to be kerfed to receive an aluminum spline attachments.
7. Clean the panel back, edges and face side with IPA and 50/50 water solution.
8. Apply a 3M # 94 primer to both the substrate and the back of the Arcoplast panel.
9. Position the 3M VHB # 4959 tape and with a two hand roller apply pressure throughout to ensure full contact with the substrate.
10. Prior to installing the liquid adhesive, dry fit the panel and filler piece to ensure a good fit.
11. Install liquid adhesive and remove the film protector on the #M VHB tape.
12. Position and install the panel. Prop in place and allow for adhesive cure time.
13. Position and install the filler piece. Prop in place and allow for adhesive cure time.
14. Once the panel and filler piece are adhered and fastened securely, proceed with the application of the 3M # 335 protective tape.
15. Apply, tool and detail the finishing compound.
16. Remove the protective tape and clean the surface area thoroughly.

Chapter Eighteen : Gel Coat Repair -

In the event of panel damage, Arcoplast gel coat surfaces can be easily repaired and restored to their new high gloss finish.

Assessing gel coat surface damage:

The Arcoplast gel coat surface has a barcol of 57, a surface finish very resistant to impacts. However the gel coat surface can be scratched with equipment, carts and sharp tools. The gel coat surface thickness is 20 mils and light scratches can be removed with light sanding and polished back to its original gloss.

There are basically three types of repair:

- Type A - Light scratches that can be sanded and polished.
- Type B – Chipped, crack or perforated gel coat that require gel coat putty filled, sanded and polished.
- Type C - Major damaged area that will require a section of the panel replaced or in extreme cases, a full panel replacement.



Arcoplast Modular Panel Installation Manual 2015

The gel coat is available in paste or neat form and both are packaged in a pint and quart size metal container. The repair kit is conveniently and securely packed and shipped in a metal container.

Note: The repair techniques herein described are suitable for all gel coated surfaces including wall and ceiling panels, beam covers, utility chases, doors and window housings finishes.


For craftsmen not familiar with the art of gel coat repair, a trial repair on a sample panel is highly recommended.

Arcoplast gel coat repair kit has also many uses and applications:

- Filling and taping mechanical fasteners
- Removing light scratches
- Repairing damaged surfaces, such as deep scratches, gouges and gel coat fissures

Repair Kit Includes:

- Gel coat putty – paste or neat form
- Sanding discs – 600,1000, 1200
- 3 transparency sheets (release film)
- Mixing cups
- Mixing sticks
- Dispensing plastic bag
- 3M Perfect-it Extra cut rubbing Compound # 06060
- 3M # Perfect-it Rubbing Compound # 06085
- MSDS & Instruction Sheets

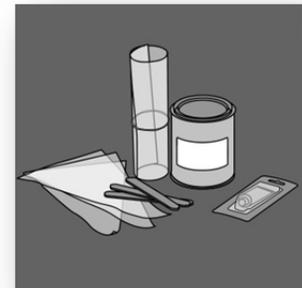

Note: Repair Kit does not include activator or liquid hardener. It is readily available in hardware stores, automotive and marine supply shops worldwide.



Arcoplast Modular Panel Installation Manual 2015

Tools Required:

- Orbital 5" (125mm) disc sander
- Countersink bits
- 1" (25mm) putty knife
- Razor scraper knife
- Masking tape
- 6" (150mm) – 10" (250mm) Buffer/Grinder
- 6" (150mm) – 10" (250mm) Wool Bonnet


Safety equipment: Arcoplast recommends the use of protective eyewear, gloves and dust mask.

For your safety and further instructions please carefully read the MSDS sheets included in with the gel coat repair kit. **Important: Do not mix, dispose or use the gel coat putty near open flames or hot elements.**


Type "A" Repair -

Light surface scratch

1. With a black felt marker highlight the scratch area.

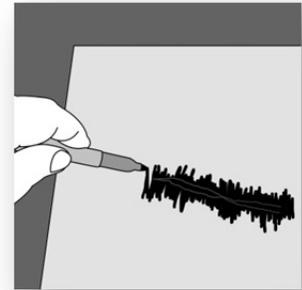

2. With an orbital sander and 600 grit sandpaper, carefully sand down the gel coat until the black mark is no longer visible.

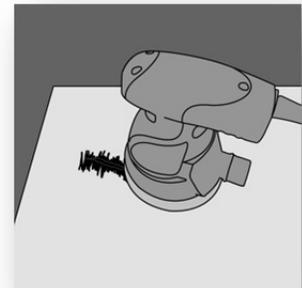


Arcoplast Modular Panel Installation Manual 2015


3. Remove dust and wipe area clean.
4. With 1,000 grit sand paper lightly sand over the previously sanded area while extending slightly onto the non-sanded area blending in the two surfaces. Remove the dust and wipe clean.



5. Repeat the same procedure with a 1200 grit sand paper. Extend the sanding diameter up to 6" (150mm) around the previously sanded area carefully blending the two different surfaces together. Remove the dust and wipe area clean.

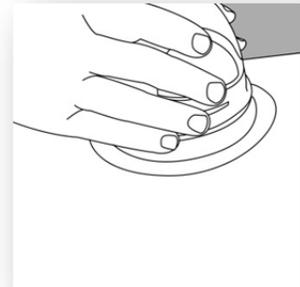

6. Apply and wet out the area with light coat of 3M Extra Cut Rubbing Compound # 06060. Buff with the buffer/grinder equipped with a semi rigid backer plate and fitted with a wool bonnet. Apply moderate pressure with moderate speed (1500 rpm). Do not apply high speed or extreme pressure as this will cause the gel coat surface to overheat and yellow the gel coat. Wipe area with a clean cloth.

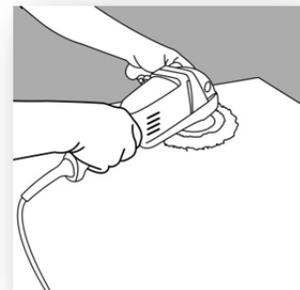

7. For the second application, apply a small "dab" of 3M Perfect-It Rubbing Compound # 06085 on the panel surface. Buff area lightly and overlap the buffing action over the existing gel coat surface transitioning into the non-damaged gel coat area. Do not use high speed or extreme pressure as this will overheat the surface and yellow the gel coat. Wipe area with a clean cloth.



Arcoplast Modular Panel Installation Manual 2015

8. Examine the area to see if the sanding and buffing has removed the scratch and blended the damage area with the surrounding gel coat finish.
9. If the repaired area is still lightly noticeable, proceed with a second application of steps g & h. Clean area thoroughly.

Type “B” Repair -

1. Preparing Arcoplast damaged surface:

The repair technique is basically the same for all Arcoplast gel-coated products and surfaces. Countersink screw heads and trim-out nicks and gouges so as to provide a seat for the gel coat putty.

(Reference Figure Panel A)

2. Measure and cut transparency sheets to a size one inch greater than the proposed area of application.
3. Clean the surface thoroughly with IPA (Isopropyl Alcohol) or Acetone.
4. Mixing the gel coat putty:
 - a. Estimate quantity of gel coat neat/putty needed for the repair.
 - b. Measure and combine the quantity of gel coat and liquid hardener. (Follow directions on mix ratio as indicated on the liquid hardener package).
 - c. Note: Large quantities of gel coat (3 oz.) with catalyst will develop more heat and activate quicker.
 - d. For light surface scratches and nicks use the neat gel coat.
 - e. For deep scratches and gouges and countersunk fasteners use the gel coat putty.
 - f. Mix the gel coat and hardener with a stirring stick, ensure both parts are well mixed.
 - g. Once the activator is added, the neat gel coat and gel coat putty will harden in approximately 20 minutes.

Note: Room temperature, mass and environmental conditions may vary the working and cure time. A sample trial to determine the working and cure time is highly recommended.

5. Application:
 - a. For minor repair of surface scratches and nicks apply the neat gel coat with a paint brush.
 - b. For deep scratches, gouges and countersunk fasteners use the gel coat putty.



Arcoplast Modular Panel Installation Manual 2015

- c. Fill the required quantity of gel coat putty in a plastic sandwich bag, cut a small section of the corner of the bag creating a small dispensing tip for the gel coat.
- d. Dispense the gel coat putty over the deep scratches and fill the gouges and countersunk screw holes. Exceed the surface lightly make sure there are no air entrapment.

(Reference Figure Panel B)

- e. Immediately apply the precut transparency film over the gel coat putty. To ensure the transparency film will stay flat and over the gel coat area, apply masking tape on the two edges of the transparency film. This will allow for the exit of air and excess putty through the edges that are not taped down.
- f. With a putty knife, trowel lightly the surface of the transparency film to push out the excess gel coat from underneath the transparency film. Leave the transparency film in place.


(Reference Figure Panel C)

- g. Remove excess gel coat putty and immediately wipe clean the surface with IPA.
- h. Allow the gel coat putty to harden approximately one hour. Carefully remove the transparency film. With a razor blade remove the residual film of gel coat around the repaired area. Do not cut into the gel coat with the razor blade.
 1. With the orbital sander and 1000 grit, sand down the gel coat putty and stop once you are starting to sand the surrounding gel coat surface.
 2. Repeat the sanding procedure with a 1200 grit sand paper. Sand lightly over the area and extend the sanding peripheral up to 6" (150mm) blending in the two surface areas.
 3. Apply and wet out the area with light coat of 3M Extra Cut Rubbing Compound # 06060. Buff with the buffer/grinder equipped with a semi rigid backer plate and fitted with a wool bonnet. Apply moderate pressure with moderate speed (1500 rpm). Do not apply high speed or extreme pressure as this will cause the gel coat surface to overheat and yellow the gel coat. Wipe area with a clean cloth.




Arcoplast Modular Panel Installation Manual 2015

4. For the second application, apply a small “dab” of 3M Perfect-It Rubbing Compound # 06085 on the panel surface. Buff area lightly and overlap the buffing action over the existing gel coat surface transitioning into the non-damaged gel coat area. Do not use high speed or extreme pressure as this will overheat the surface and yellow the gel coat. Wipe area with a clean cloth.

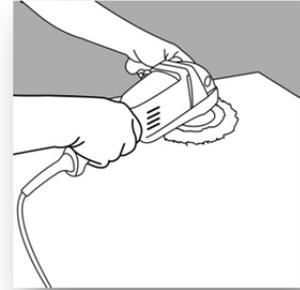

Note. For cleanroom facilities with stringent environmental controls the sanding operation can be completed with 3M wet sanding disc.

Reference Figures

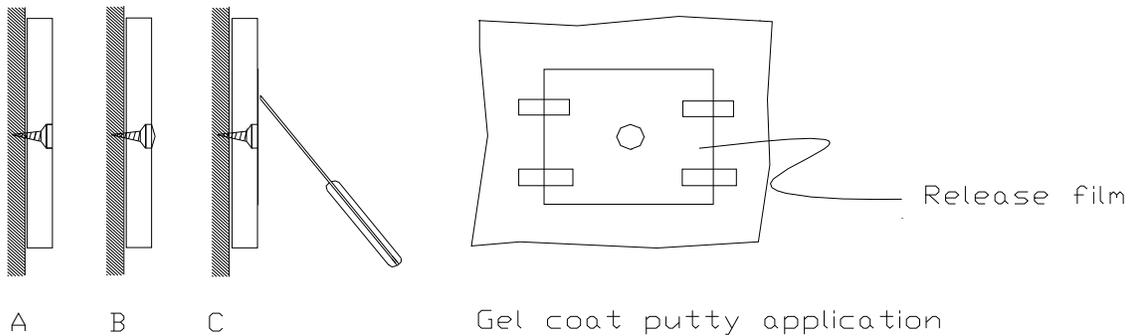

Arcoplast Modular Panel Installation Manual 2015

6. Temporary enclosure:
 - a. Temporary enclosures are quickly and easily constructed. They can be sealed in place with a 6mm clear polyethylene sheets and held in place with third hand post. Once the repair is completed, it can be dismantled and easily disposed.



7. Disposal of debris and waste:
 - a. Mix together any remaining or unnecessary gel coat putty and liquid hardener to create solid waste for disposal.

Important: Larger quantities of gel coat putty (especially in confined containers) will cure faster and are more susceptible to emitting heat and potentially igniting. Do not dispose with flammable objects or into general waste containers. It is recommended to dispose in a metal container and to ensure it is cooled off before disposing.

8. Storage of Arcoplast gel coat kit:
 - a. For future applications, store the excess gel coat putty and liquid hardener in its original container and in a safe dry area.
 - b. Gel Coat recommended storage temperature 40° F (5C).
 - c. Gel Coat shelf life is approximately 6 to 8 months.

Emergency Assistance:

For emergency assistance call Arcoplast, Inc. 888-736-2726





Arcoplast Modular Panel Installation Manual 2015

DISCLAIMER

This manual is provided for informational purposes only. Arcoplast, Inc.'s (hereinafter "Arcoplast") information contained in this manual represents the current views of Arcoplast on the issues discussed as of the date of publication. These opinions, as expressed, should not be interpreted to be a commitment on the part of Arcoplast, and Arcoplast cannot guarantee the accuracy of any information presented after the date of publication. The user assumes the entire risk as to the accuracy and the use of this document.

This manual provides a basic guide for the installation of Arcoplast's Modular Panel and is intended to supplement, rather than replace, the basic construction knowledge of the construction professional. All installations of Arcoplast's modular panels must be in accordance with all applicable building codes.

INFORMATION CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," WITHOUT ANY WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE.

IMPORTANT: FAILURE TO INSTALL THIS PRODUCT IN ACCORDANCE WITH ARCOPLAST'S INSTALLATION MANUAL MAY LEAD TO PERSONAL INJURY, PROPERTY DAMAGE AND/OR AFFECT PERFORMANCE OF ARCOPLAST'S MODULAR PANEL(S).

In no respect shall Arcoplast incur any liability for any damages, including, but limited to, direct, indirect, special, or consequential damages arising out of, resulting from, or any way connected to the use AND/OR INSTALLATION of its Modular Panel(s), whether or not based upon warranty, contract, tort, STATUTORY PROVISION or otherwise; whether or not injury was sustained by person, property or otherwise; and whether or not loss was sustained from, arose out of, OR the result of Arcoplast's Modular Panel(s).

NOTE: No installation manual can anticipate all the questions that might arise during installation of Arcoplast's Modular Panel(s) product. Recognizing this, Arcoplast focused on the tools and techniques used to complete typical installations. Where appropriate, Arcoplast also included alternative approaches for specific installation steps. If you encounter a unique installation problem not covered in this manual, we suggest you contact Arcoplast directly at 1-888-736-2726.





Arcoplast Modular Panel Installation Manual 2015



For additional information contact our technical services (888) 736-2726

Office: 1873 Williamstown Drive, Saint Peters, MO 63376

Training Center: 106 Crafton Drive, O'Fallon, MO 63366

© 2013 Arcoplast, Inc. All rights reserved.

