


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO ARCOPLAST. ALL COPYRIGHTS AND OTHER PROPRIETARY RIGHTS APPLICABLE SHALL REMAIN AT ALL TIMES ARCOPLAST'S PROPERTY. DOCUMENTS SHALL NOT BE USED, COPIED OR HARVESTED FROM THE CAD FILE, THE INFORMATION CONTAINED WITHIN WITHOUT THE WRITTEN CONSENT OF ARCOPLAST. DOCUMENTS, DESIGNS, DRAWINGS AND SPECIFICATIONS ARE CONCEPTUAL IN NATURE AND ARE INTENDED TO SET FORTH DESIGN INTENT ONLY AND ARE NOT TO BE USED FOR ENGINEERING PURPOSES.

(2) TWO ROWS 1/2" WIDE 3M TWO SIDED TAPE (VHB-4956),
CONTINUOUS @ 3/8" (9.525 mm) FROM CENTER
EACH SIDE W/ ARCOPLAST STRUCTURAL
ADHESIVE (A-2020) CENTERED
DIRECTLY BEHIND JOINT

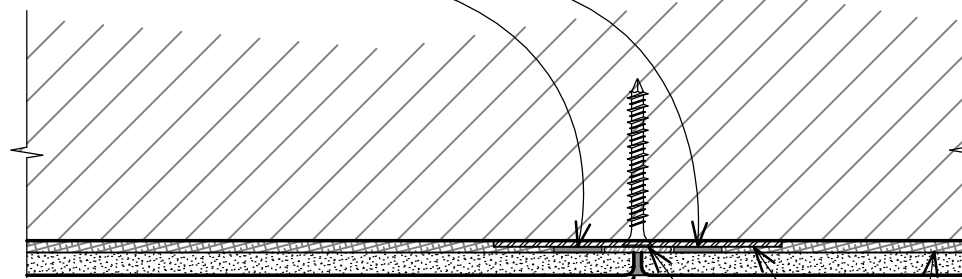


ARCOPLAST BIO-SEAL (A-1010)
WHITE FINISHING COMPOUND

FLUSH TAPCON PER CONDITION REQUIREMENTS
LOCATED @ 12" (304.8 mm) O.C. (TYP.)
COUNTERSINK FURRING STRIP

16 GAUGE GALVANIZED METAL BACKER PLATE
3" (76.2 mm) x CONTINUOUS LENGTH
SPACED AT 48" (121.92 cm) O.C. (TYP.)
(ALWAYS LOCATED AT PANEL JOINTS)

EXISTING STRUCTURE

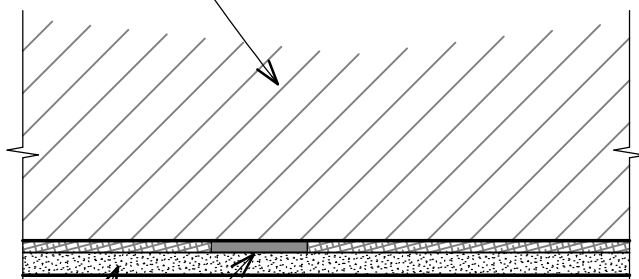

1" WIDE 3M TWO SIDED TAPE (VHB-4959)
LOCATED AT 24" (60.96 cm) O.C. CENTERED
BETWEEN METAL FURRING STRIPS (TYP.)

ARCOPLAST 1/4" (6 mm) ACRYLOYL
(ENGINEERED POLYMER) WALL PANEL

ADVANCED POLYMER FULL
TROWELED ADHESIVE PUTTY


ACRYLOYL (ENGINEERED POLYMER) WALL PANEL (6.0 MM) OVER EXISTING CONDITIONS ASSEMBLY

DWG #
PP-43-EP

SCALE
6" (1:2)

DATE
2/20/2020

CHECKED
GB

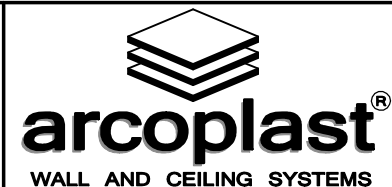

1873 WILLIAMSTOWN DRIVE
ST. PETERS, MISSOURI USA 63376
T: 888-736-2726 F: 636-978-7782

WWW.ARCOPLAST.COM