

(2) TWO ROWS 3M TWO SIDED TAPE (VHB-4956),
CONTINUOUS @ 3/8" (9.525 mm) FROM CENTER
EACH SIDE W/ ARCOPLAST STRUCTURAL
ADHESIVE (A-2020) CENTERED
DIRECTLY BEHIND JOINT

NEW OR EXIST. STRUCTURE


POSITION TAPE/SEALANT BEHIND
PANEL JOINTS FOR RIGIDITY

ARCOPLAST 3/16" (5 mm) GFRMC
CEILING PANEL

TEMPORARY 2x4 STRIPPING TO BE ATTACHED
AT ALL PANEL JOINTS (TYP. 4'-0" (1.2m) O.C.)
ATTACHED WITH SCREW THAT IS APPLICABLE TO
STRUCTURE AND LONG ENOUGH TO HOLD
AS REQUIRED @ 24" (60 cm) O.C.

1/2" WIDE 3M TWO SIDED TAPE (VHB-4956) W/
CONTINUOUS BEAD OF ARCOPLAST STRUCTURAL
ADHESIVE (A-2020), SIDE BY SIDE, ADHESIVE SHALL
BE LOCATED AT 16" (40.6 cm) O.C.

FULL TROWELED ADHESIVE PUTTY

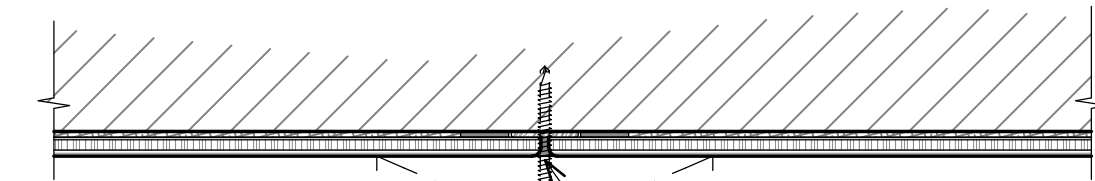

REMOVE 2x4 STRIPPING
AND SCREWS TO EXPOSE
PANEL JOINT AFTER
12 HOUR CURING TIME

FINISH PANEL JOINT WITH
ARCOPLAST BIO-SEAL (A-1010)
WHITE FINISHING COMPOUND

GFRMC CEILING PANEL (5.0 MM), TEMPORARY CEILING ATTACHING ASSEMBLY

DWG #
CDA-6-MC

SCALE
6" (1:2)

DATE
2/20/2020

CHECKED
GB



1873 WILLIAMSTOWN DRIVE
ST. PETERS, MISSOURI USA 63376
T: 888-736-2726 F: 636-978-7782

WWW.ARCOPLAST.COM